

EXHIBIT NO.__(DKP-1)

Dominion Energy
South Carolina:
2020–2029 Achievable
DSM Potential and
PY10–PY14 Program Plan
Final Report

June 2019

CONTENTS

1.	POTENTIAL STUDY AND PROGRAM PLAN OVERVIEW	1
2.	ENERGY EFFICIENCY POTENTIAL STUDY EXECUTIVE SUMMARY	2
3.	STUDY APPROACH	3
	Overview	3
	Data Review and Gap Analysis	4
	Measure Analysis	6
	Program Modeling	10
	Scenario Development	17
4.	UTILITY SERVICE AREA CHARACTERISTICS	21
	Residential Characteristics	22
	Commercial Characteristics	23
	Industrial Characteristics	24
5 .	ACHIEVABLE ENERGY EFFICIENCY POTENTIAL	25
	Portfolio Results	25
	Residential Sector Results	28
	Commercial Sector Results	33
	Industrial Sector Results	36
	Portfolio Benchmarking	38
6.	DEMAND RESPONSE POTENTIAL STUDY EXECUTIVE SUMMARY	40
7.	STUDY APPROACH	41
	Overview	41
	Data Review	42
	Program Modeling	44
8.	ACHIEVABLE DEMAND RESPONSE POTENTIAL	49
9.	FIVE-YEAR PROGRAM PLAN EXECUTIVE SUMMARY	52
10.	OVERVIEW OF METHOOLOGY	54
	10.1 Development of DSM Measure Load Impacts	54
	10.2 Screening of Individual Measures	55
	10.3 Bundling of Measures	55
	10.4 Forecasting of Participation	56
	10.5 Costing of Programs	
	10.6 Program Cost-Effectiveness Screening	
	10.7 Comparison of DSM Program Plan to the Potential Study	
11.	INDIVIDUAL PROGRAM SUMMARIES	
	11.1 Residential Appliance Recycling	



	11.2	2 Residential Heating & Cooling and Water Heating Program	62
	11.3	Residential Home Energy Check-up Program	64
	11.4	4Residential Home Energy Reports	66
	11.5	5 Residential Neighborhood Energy Efficiency Program	67
	11.6	Residential EnergyWise Savings Store	69
	11.7	7 Multifamily	71
	11.8	8 Commercial and Industrial EnergyWise for Your Business	73
	11.9	9Small Business Direct Install (SBDI)	75
	11.1	10 Municipal LED Lighting	78
12.	COI	NCLUSIONS	79
APF	PENI	DICES	80
	A.	Additional Scenario – Planned AMI Installation	80
	B.	Avoided Costs	82
	C.	Payback Curves	83
	D.	Measure Information	. 85
	E.	Program Assumptions	. 127



LIST OF TABLES

T-1-1- 4 C	N. d. Data Oa assa	4
	Study Data Sources	
		8
	Number of Measures Tested for Cost-Effectiveness and Included in the Analysis	
	Illustrative Measure Eligible Stock Calculation (Water Heater Blanket)	
	Ilustrative Measure Incentive Calculations	
	Ilustrative Market Diffusion Assumptions	
	Potential Study Scenario Programs, by Customer Sector	
	Current and Expanded Scenario Residential Program Differences	
	Current and Expanded Scenario Commercial Program Differences	
Table 10.	Current and Expanded Scenario Industrial Program Differences	20
	Industrial Electricity Use, by End-use	
Table 12.	Forecasted MWh Savings as a Percentage of Previous Year Sales	25
Table 13.	Current Scenario Customer Class	26
	Expanded Scenario Customer Class	
	Current Scenario Annual and Levelized	
	Expanded Scenario Annual and Levelized	
Table 17.	Current Scenario Total Annual Program Costs	27
Table 18	Expanded Scenario Total Annual Program Costs	27
	Current Scenario Residential Portfolio	
		32
	Current Scenario Residential Annual and Levelized Cost of Energy Saved, by Program	
	Expanded Scenario Residential Annual and Levelized Cost of Energy Saved, by Program	
Table 22.	Expanded decitation residential number and Edvenzed dost of Energy daved, by 1 logic	
	Current Scenario Total Annual Residential Program Costs	
	Expanded Scenario Total Annual Residential Program Costs	
	Current Scenario Commercial Portfolio	
	Expanded Scenario Commercial Portfolio	
	Current Scenario Commercial Annual and Levelized	
	Expanded Scenario Commercial Annual and Levelized	
	Current Scenario Total Annual Commercial Program Costs	
	Expanded Scenario Total Annual Commercial Program Costs	
	Industrial Portfolio Cost-Effectiveness Results	
	Industrial Annual and Levelized	
	Total Annual Industrial Program Costs (in millions of dollars)	
	Scenarios Modeled	
	DLC Measures Considered	
	Sample List of DR Programs From Which Applicable Program List Is Filtered	
	DLC Measures with a TRC Benefit/Cost Test Ratio of 1.0 or Higher	
Table 38.	Winter Program Annual Costs for New Programs (\$M)	51
Table 39.	Levelized Costs and Benefit-Cost Test Results of the DR Portfolio	51
	Summary of Programs Recommended for Implementation	
	Measure and Program Cost-Effectiveness Screening Comparison	
	Program Cost-Effectiveness Summary	
	Program Incentives Summary for Residential Appliance Recycling	
Table 44.	Program Impact Summary for Appliance Recycling	61
Table 45.	Program Incentives Summary for Residential Heating & Cooling and Water Heating	
Program.		
	Program Impact Summary for Heating & Cooling and Water Heating	
	Program Incentives Summary for Residential Home Energy Check-up Program	
	Program Impact Summary for Home Energy Check-up	



Table 49. Program Impact Summary	y for Home Energy Reports	66
Table 50. Program Incentives Sumn	nary for Residential Neighborhood Energy Efficiend	cy Program. 67
Table 51. Program Impact Summary	y for Neighborhood Energy Efficiency	67
Table 52. Program Incentives Sumn	nary for Residential Online Store	69
Table 53. Program Impact Summary	y for Online Store	69
Table 54. Program Incentives Sumn	nary for the Multifamily Program	71
Table 55. Program Impact Summary	y for Multifamily Program	71
Table 56. Program Incentives Sumn	nary for EnergyWise for Your Business	73
Table 57. Program Impact Summary	y for EnergyWise for Your Business	74
Table 58. Program Incentives Sumn	nary for Small Business Direct Install Program	76
Table 59. Program Impact Summary	y for Small Business Direct Install	76
Table 60. Program Incentives Sumn	nary for Municipal LEDs	78
	y for Municipal LED Lighting	
<u> </u>		



LIST OF FIGURES

Figure 1. Overview of Bottom-up Approach to Potential Study	
Figure 2. Illustrative Payback Acceptance Curve	15
Figure 3. Market Diffusion Curve	16
Figure 4. Share of Total Estimated DESC Retail GWh Sales in 2019, by Customer Class	
Figure 5. Opted-out vs. Not Opted-out Sales in 2019, by Customer Class	
Figure 6. System Load (left axis) and Load Growth (right axis) in the Base Case	
Figure 7. Distribution of Home Types and Home HVAC Types in the DESC Service Area	
Figure 8. Commercial Customer Usage, by Building Type	
Figure 9. Agricultural Customer Count	23
Figure 10. Distribution of Industrial Electricity Use by Subsector (Total: 983 GWh)	
Figure 11. Incremental and Cumulative Portfolio Energy Savings	
Figure 12. Net Residential Incremental MWh Savings in 2024, by Program	
Figure 13. Net Home Energy Check-up Incremental MWh Savings in 2024, by Measure Type	
Figure 14. Net Multifamily Incremental MWh savings in 2024, by Measure Type	
Figure 15. Total Incremental Heating and Cooling Program Savings	
Figure 16. Net Incremental Residential Portfolio MWh Savings	
Figure 17. Net Commercial Incremental MWh Savings in 2024, by Program	
Figure 18. Additional Net Incremental MWh Savings in 2024 in Expanded Scenario, by Mea	
Туре	
Figure 19. Net Industrial Incremental MWh Savings in 2024, by Program	36
Figure 20. Net Incremental MWh Savings in 2024, by Measure Type	
Figure 21. Histogram of Total Savings Impacts in the South Census Region for 2017 (n=42)38
Figure 22. Histogram of Total Energy Efficiency Portfolio, in \$/kWh, in the South Census Re	egion for
2017 (n=40)	39
Figure 23. Results from eight comparable potential studies in the U.S. Southern region, and	from this נ
study	
Figure 24. Overview of Bottom-up Approach to Potential Study	42
Figure 25. Load Growth and Load Impact, by DR Program	49
Figure 26. Winter DR Savings Forecast	49
Figure 27. DESC Winter Peak Load Share by Sector	50
Figure 28. System Load and Load Savings Distribution by Sector From 2020 to 2029	
Figure 29. Program Development Process	54
Figure 30. AMI Installations – (a) Required and (b) Expected	
Figure 31. Additional AMI Scenario – DR Potential	80



1. POTENTIAL STUDY AND PROGRAM PLAN OVERVIEW

ICF was retained by Dominion Energy South Carolina, Inc. (DESC) to produce a 10-year potential study focused on both Energy Efficiency (EE) and Demand Response (DR) measures. In addition, based on the outputs of the potential study, a five-year program plan was developed for the purposes of guiding the implementation of cost-effective energy efficiency programs. This report contains three sections:

- 1. A ten-year vision of the potential of EE within DESC service territory
- 2. A ten-year vision of the potential of DR within the DESC service territory
- 3. A five-year program plan for the implementation of EE programs within DESC service territory



2. ENERGY EFFICIENCY POTENTIAL STUDY EXECUTIVE SUMMARY

ICF was retained by Dominion Energy South Carolina, Inc. (DESC) to conduct an energy efficiency potential study over a 10-year horizon which is used to inform cost-effective, energy efficiency program plans for PY10–PY14 (December 1, 2019 – November 30, 2024). This report complements an additional section on the demand response potential analysis that was conducted by ICF for the same purpose.

A bottom-up process was used to determine the 10-year achievable energy efficiency potential forecasts for the 2020–2029 period. Included in these forecasts are ten energy efficiency programs covering the residential, commercial, and industrial sectors under **current programs** and **expanded programs** scenarios. The key results are:

- ▶ Total incremental (annual) savings increase by 1.6 times in the mid-term. In the expanded programs scenario, annual savings achieved by DESC programs grow by a factor of 1.6 above the savings achieved by DESC programs in Program Year 7 (December 1, 2016 November 30, 2017). The growth in annual savings is attributed to increased budgets for existing DESC programs, and to savings achieved by new (expanded) programs, which contribute an additional 80% to savings above the current programs scenario level in 2022.
- ▶ In the expanded programs scenario, the Home Energy Report behavioral program represents the largest residential savings opportunity, replacing lighting as the most important savings type. New programs/measures could increase residential sector savings by a factor of 2.1 by 2024, driven largely by the expansion of the Home Energy Check-up program and the new Multifamily and Water Heating programs.
- ▶ For the commercial sector, the Small Business Energy Solutions program shows the largest expansion in program savings. Expanded programs could increase commercial savings by roughly 103% above the current programs scenario by 2029.
- ▶ A new Strategic Energy Management (SEM) focus can drive significantly increased savings for the industrial sector. Expanding the industrial measures to include education and incentives for SEM can specifically target the customers that have not opted-out and can double industrial sector savings from 2020–2022.
- ▶ The full portfolio has a Total Resource Cost test ratio of 1.8 in the expanded programs scenario and 1.9 in the current programs scenario.

This study represents a significant update from the previous potential study completed in 2009. Improvements are based on significantly increased experience with the programs being run, as well as updates to technology standards and changes in the characteristics of the DESC service territory. In the intervening years, there also has been many industrial and some commercial customers that have opted-out of participating in the efficiency programs.



3. STUDY APPROACH

Overview

This bottom-up analysis began with collecting data on all relevant inputs, including baseline data, measure data, and program data. This was followed by estimating the eligible stock of energy efficiency measures. The eligible stock is the size of the market for efficiency measures, in measure units, such as bulbs, tons of cooling, or number of homes. ICF estimated the eligible stock for measures within each end-use and sector. This task required data on the number on customer types in DESC's service area, the number and types of buildings, the types of energy-using equipment that are in each building type, and the current saturation of energy-efficient equipment.

The measures were then screened for cost-effectiveness using the Total Resource Cost (TRC) test to determine the economic potential. Measures with a TRC test result of 1.0 or better passed to the next stage of the analysis. Non-energy benefits were included in the TRC calculations, including water and wastewater savings, natural gas savings, and avoided and deferred equipment replacement costs. Water savings were included for water usage reducing measures, such as low-flow showerheads, while natural gas savings were included for measures, such as insulation and air sealing, installed in gas-heated buildings. Avoided and deferred equipment replacement cost savings were included for measures that have a longer estimated useful life than the technologies they are replacing. The longer lifetime means that the measure will require fewer replacements. The most prominent example is light-emitting diode (LED) lighting, which has an estimated useful lifetime in the range of 20 years, instead of the base technology lifetime of five years. This means that over the LED lifetime there are three additional replacements of lighting that no longer occur because of the new measure.


With the eligible stock of the technical potential and cost-effective measures of the economic potential defined, ICF then conducted the achievable potential analysis, which required developing savings forecasts for demand-side management (DSM) programs for the 2020–2029 period under two scenarios: (1) a **current programs scenario** where DESC programs were modeled based on program designs implemented and performance achieved by DESC through PY7, and (2) an **expanded programs scenario**, which includes the programs in the current programs scenario, some of which were modified or expanded, plus new best practice programs. In addition, a mathematical optimization of the expanded programs scenario was run. The optimization that was performed intended to maximize the TRC ratio of the portfolio of programs targeting each customer segment. The optimization varied the participation for each measure in a range based on the historical program performance and other variables used in estimating program participation. The upper and lower bounds for the optimization were set independently for each program. Other assumptions that varied between these cases included participation rates, program marketing costs, and net-to-gross (NTG) ratios. Other utility assumptions, such as retail rates, avoided costs, and discount rates, were held constant in both scenarios.

During this study, there were multiple major points for stakeholder engagement, which included both in-person meetings and addressing written feedback. The first was early in the process to present the approach to the Energy Efficiency Advisory Group and discuss the full list of measures that would serve as the starting point for the study. During the study, workshops similar to focus group meetings were held with trade allies/contractors to present program ideas and receive feedback. Near the end of the study draft results were presented to the Energy Efficiency Advisory Group. All collected feedback was addressed to finalize the forecasts.



Figure 1 shows the approach to this study.

Figure 1. Overview of Bottom-up Approach to Potential Study

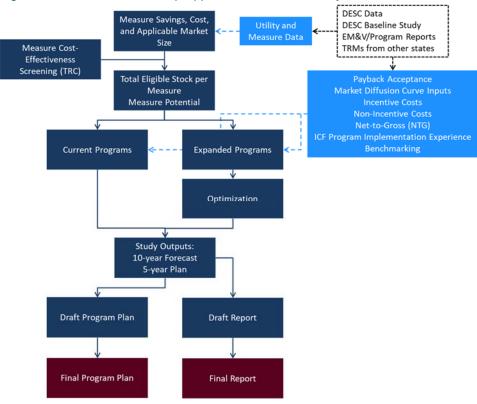

Data Review and Gap Analysis

Baseline Market Characterization

Opinion Dynamics Corporation (ODC) performed the baseline market characterization for both the Residential and Commercial market segments. This included telephone surveys of a large sample of the customer base and a select set of site visits for more detailed and verifiable data. The details of this information, as well as supplemental work performed by ICF, are included below in Section 4, Utility Service Area Characteristics.

Utility, Measure, and Program Data

ICF developed some of the data specifically for this study (Table 1), performing engineering calculations and building simulations to develop energy-savings estimates for some measures, as well as processing the data provided into a usable form. ICF experts also informed program participation rates that are detailed further in the following sections. ICF used data on utility characteristics, measure baselines and parameters, and programs using DESC and South Carolina-specific data, where possible. Standard industry sources for the South Atlantic region and national data supplemented the local data. Table 1 presents the data sources for this study.

Table 1. Study Data Sources

Data/Information Type	Source	Primary Purpose of Study
Utility Data		
Avoided costs	DESC data	Cost-effectiveness testing



Data/Information Type	Source	Primary Purpose of Study
Other planning assumptions, such as DESC discount rates, line losses, or growth rates	DESC data	Cost-effectiveness testing
Customer counts (residential, commercial, and industrial)	DESC data	Calculating eligible stock
Load forecast/sales data	DESC data	Calculating load impacts of DSM potential
Retail rates for all rate classes	DESC data	Calculating Participant Cost Test and participation for achievable potential analysis
Baseline Data		
Residential building characteristics and efficiency	Opinion Dynamics Corporation (ODC) Residential Appliance Saturation Surveys (RASS)	Calculating eligible stock
saturation	U.S. DOE Residential Energy Consumption Survey (RECS, 2015)	
	ODC Commercial Appliance Saturation Survey	
Commercial building characteristics and efficiency	DESC Commercial Customer Data	Calculating eligible stock
ituration	U.S. DOE 2012 Commercial Buildings Energy Consumption Survey (CBECS, 2016)	
	USDA Census Data	
Agricultural building characteristics and efficiency saturation	SC Department of Natural Resources, Coastal Plain Water Well Inventory	Calculating eligible stock
	DESC Industrial Customer Consumption Data	
Industrial subsector characteristics and efficiency saturation	DESC Industrial Customer Segments based on Standard Industrial Classification	Calculating eligible stock
	U.S. DOE 2010 Manufacturing Energy Consumption Survey (MECS, 2013)	
Measure Data		



Data/Information Type	Source	Primary Purpose of Study	
Residential and commercial measure data	DESC Program Evaluation and Tracking Data Technical Reference Manuals; including Arkansas and Texas	Measure database development	
Agricultural measure data	ICF Program Implementation Experience Technical Reference	Measure database development	
	Manuals; including Arkansas and Pennsylvania		
	U.S. DOE studies		
Industrial measure data	U.S. EPA studies	Measure database development	
industrial measure data	LBNL studies	ineasure database development	
	ICF expert knowledge		
Program Data			
ICF program data and expert judgment	ICF	Estimating achievable potential	
Historical program savings (evaluation) and cost data	DESC	Calculating eligible stock, Estimating program expenses, Estimating achievable potential	
Energy efficiency program savings and costs data run by other utilities	ESource Database	Estimating achievable potential	

Measure Analysis

Measure Database

ICF developed a comprehensive measure database for this study, including commercially available measures covering each relevant savings opportunity within each end-use and sector. The database includes prescriptive or "deemed" type measures, whole building options (e.g., commercial custom and new construction projects), and behavioral measures (e.g., residential home energy report benchmarking and retro-commissioning measures). Measure end-uses covered include the following:

- Residential
 - o Appliances
 - Consumer electronics
 - o Envelope (building shell)
 - Water heating
 - Heating, ventilation, and air conditioning (HVAC)
 - o Lighting
 - Other (e.g., benchmarking)



Commercial

- Envelope (building shell)
- Food services equipment
- Water heating
- o HVAC
- o Lighting
- o Miscellaneous
- Refrigeration

Industrial

- Compressors
- o Facility HVAC
- o Facility lighting
- o Fans
- o Machine drive
- o Motor, other applications
- o Other process and non-process uses
- Process cooling and refrigeration
- Process heating
- o Pumps

Agricultural

- o Lighting
- o Pumping
- Ventilation
- Water cooling
- Water heating



Table 2 shows the illustrative characteristics of each measure modeled.

Table 2. Illustrative Characteristics of Measures

Mea	asure Characteristic	Value
1.	Applicable sector	Commercial
2.	Applicable subsector	Grocery
3.	Building type	All grocery
4.	End-use	Refrigeration
5.	Measure name	Night covers for open refrigerated display cases
6.	Measure definition	Curtains or covers on top of open refrigerated or freezer display cases
7.	Baseline definition	No night cover, average of vertical, semi- vertical, and horizontal units
8.	Measure unit	Per linear foot of display case
9.	Measure delivery type	Retrofit
10.	Incremental cost	\$42
11.	Baseline unit effective useful life	N/A
12.	Efficient unit effective useful life (years)	10.0
13.	Incremental (annual) kilowatt-hour (kWh) savings	126
14.	Incremental kilowatt (kW) savings	0.0

In total, ICF analyzed 454 measure types and 1,442 measure permutations for this study. Many measures required permutations for different applications, such as different building types, lamp wattages, efficiency levels, and decision types. For example, there are permutations of central air conditioners by seasonal energy efficiency ratio (SEER) level, subsector, and building type. Descriptions of each measure type and permutation appear in Appendix D as well as measure cost-effectiveness results.

All measures were analyzed for cost-effectiveness using the measure TRC test. In most cases, only measures with a TRC of 1.0 or higher (in their representative test years) passed to the next stage of the analysis. A measure with a TRC result of 1.0 indicates that the measure is cost-effective on a stand-alone basis (before consideration of program costs or NTG ratios). An exception to this rule for non-economic measure permutations was made when most of the permutations of that measure type were cost-effective. For example, if a measure type was cost-effective for a majority of, but not all, applicable building types, the measure type was included for all building types in the achievable potential analysis. Excluding participation by customers in a specific building type can be impractical in implementation.

ICF also applied the converse principal in a small number of cases. For example, if a measure was cost-effective for a minority of building types, ICF excluded all permutations of the measure in the

¹ Measure TRC benefits include avoided energy costs, avoided capacity costs, and other non-electricity savings over the lifetime of the measure. Measure TRC costs are measure incremental costs; these include the difference in equipment and labor costs between the efficient and baseline units.



_

achievable potential analysis, because it can be impractical in implementation to limit participation to certain building types.

Table 3 shows the number of measures evaluated for cost-effectiveness and the number that were economic. About 70% of the measures evaluated were found to be economic and were therefore included in energy efficiency programs.

Table 3. Number of Measures Tested for Cost-Effectiveness and Included in the Analysis

Subsector	Measure Types Tested for Cost- Effectiveness	Total Measure Permutations Tested for Cost- Effectiveness	Number of Measure Types Passing Cost- Effectiveness Screening Included in the Analysis	Number of Measure Permutations Passing Cost- Effectiveness Screening Included in the Analysis
Residential	152	337	101	223
Commercial	203	447	144	318
Industrial	93	644	69	478
Agricultural	6	14	6	13
TOTAL	454	1,442	320	1,032

For the purposes of evaluating cost-effectiveness, DESC uses a difference in revenue requirements methodology to calculate both the energy component and the capacity component of its avoided costs. This approach involves calculating the revenue requirements between a base case and a change case.

For the avoided energy cost calculation, the base case is defined by DESC's existing fleet of generators plus any projected future generators, as well as the solar facilities with which DESC has executed a power purchase agreement. The change case is the same as the base case except that the hourly loads are reduced by a 100 MW EE profile. The avoided energy cost is simply the difference between the base case costs and the change case costs. For the purposes of this calculation, a value of \$0.0358 per kWh (in 2019 dollars) was used, followed by the application of an 8% average line-loss factor.

For the avoided capacity cost calculation, a resource plan populated with internal combustion turbines (ICT) is used. DESC calculates the incremental capital investment related revenue required to support the ICT resource plan. DESC derives a change case in its resource plan by adding a 100 MW purchase then adjusting the expansion plan accordingly. The difference in the revenue requirement between the base case and the change case defines the avoided capacity cost. For EE that value is multiplied by 63.7% which is the percentage of EE available at winter peak. For more information avoided costs are discussed in Appendix B.

A key measure baseline change accounted for in this study was a new federal efficiency standard for split HVAC systems. The change increases the baseline from SEER 14 to SEER 15 in 2023. In addition, lighting savings are expected to significantly decrease, or be removed, due to the Energy Independence and Security Act (EISA), 2007. This baseline change is discussed in detail in the Residential Sector Results section.



Eligible Stock

The eligible stock is the size of the market for efficiency measures, in measure units, such as bulbs, tons of cooling, or number of homes. ICF estimated the eligible stock for each measure within each end-use and sector. Key data from the baseline sources noted previously include items such as:

- Percentage of homes with an equipment type (e.g., light bulbs, central AC, refrigerator)
- Equipment counts (e.g., number of bulbs per home, tons of cooling per home, refrigerators per home)
- Equipment efficiency level (e.g., bulb type, SEER rating, ENERGY STAR® rating)
- Equipment age

A simple example of an eligible stock calculation for residential electric water heater blankets is shown in Table 4. This example shows that there are 87,304 water heaters eligible for tank wrap insulation (row h). Because this is a retrofit measure, the eligible stock does not account for stock turnover. Stock turnover is the rate at which existing equipment expires and requires replacement. It is the inverse of equipment age, or 1 divided by the equipment's effective useful life (EUL). If this were a replace-on-burnout Water Heater measure, the eligible stock would equal 1/5 years (1/a) times row h, which equals 17,461 water heater tank wraps wearing out every year and eligible for replacement.

Table 4. Illustrative Measure Eligible Stock Calculation (Water Heater Blanket)

Va	riable	Value	Source or Calculation
	Measure Name	Electric Water Heater Blanket	
	Measure Baseline	No Water Heater insulation	
а	Baseline unit EUL (years)	5	DESC Program Evaluation
b	Low-income customers	145,144	DESC
С	Homes with electric water heaters (%)	69.2%	DESC RASS, survey performed by ODC
d	Number of measure units per home	1.00	1 water heater unit per home
е	Applicability (% of homes with storage water heaters)	97.7%	RECS 2015, South Atlantic region data
f	Efficient unit saturation	11.0%	DESC RASS, survey performed by ODC
g	Not yet adopted rate	89%	1 – f
h	Total eligible stock in 2020 (number of potential WH storage tanks w/o insulation)	87,304	b × c × d × e × g

Program Modeling

Program Types Modeled

ICF modeled eight residential and five non-residential program types for this study, as described briefly below, by sector. These program types result in 10 programs within the five-year program plan.

Residential Programs

Appliances Recycling – Promotes the retirement and recycling of inefficient, working refrigerators and freezers from households by offering incentives and free pick-up and responsible recycling of the equipment.



- ▶ Heating and Cooling Promotes investment in long-term savings by providing rebates for the purchase and installation of high-efficiency home HVAC equipment. A new addition to the program is rebates for Air-Source Heat Pumps when replacing electric resistance heating and higher incentives to encourage the installation of 15 SEER units over baseline equipment (14 SEER equipment).
- ▶ Home Energy Check-up Conducts audits of all residential home types to educate on home energy consumption and identify opportunities to save energy and money. Direct install measures, including LED bulbs and faucet aerators, are installed for free. In addition, water heater and water pipe wrap insulation are left with customers with electric water heaters. Participants also can receive incentives for more comprehensive measures installed that are identified during the audit, such as duct sealing and ceiling insulation.
- ▶ Home Energy Reports (home energy benchmarking) This program (electronically or through mail) provides information on energy use to home occupants that encourages them to save energy. This information typically includes home energy use for the last month compared with historical energy use, and also compares the occupants' energy use with the energy use of similar homes. In the expanded case, the program switches from opt-in to an opt-out model.
- Neighborhood Energy Efficiency Provides energy education, an on-site energy survey of the dwelling, and direct installation of select energy-saving measures at no additional cost for customers based on qualifying income levels. These are delivered in a door-to-door "sweep" approach in neighborhoods that have a significant number of households with low income, defined as ≤ 150% of the federal poverty guidelines.
- EnergyWise Savings Store (Online Store) Provides rebates for qualifying ENERGY STAR® lighting and smart thermostats through an online store, as well as education to increase customer awareness of energy-efficient appliances.
- Water Heating Provides rebates to customers to encourage the installation of heat pump water heaters. In the five-year program plans, this offering will fall under the Heating and Cooling expanded program.
- Multifamily Provides energy education, an on-site energy survey of the dwelling, and direct installation of select energy-saving measures specific to multifamily customers. In addition, energy efficiency measures will be recommended for common areas to include LED lamps and/or fixtures which will result in incentives for property owners.

Commercial Programs

- ▶ EnergyWise for Your Business The prescriptive element of the program provides incentives to customers per unit based on the deemed savings. The custom element identifies and implements site-specific and unique cost-effective energy efficiency opportunities that are not available via the prescriptive element. Customized incentives, based on calculated savings for specific customer projects, are offered. Agricultural focused measures were added to the program to meet the specific needs of that business type in the commercial sector.
- ▶ Small Business Direct Install Implements energy efficiency projects for customers under 300 megawatt-hours (MWh) annually and with no more than five accounts owned by a single customer. These customers include convenience stores, offices, garages, warehouses, restaurants, and other smaller businesses. The program measures are directly installed for the customers and are primarily lighting and refrigeration.
- ▶ **Municipal LED Lighting** Provides incentives for municipal customers to convert municipal street lighting from high-intensity discharge to LED (solid state).



Industrial Programs

- Industrial Efficiency Provides prescriptive and custom incentives for measures implemented on industrial facilities, such as lighting and HVAC. Custom incentives for measures implemented on industrial plant equipment include motors and compressed air. In the five-year program plans, this offering will be fall under the EnergyWise for Your Business expanded program.
- ▶ Strategic Energy Management Helps businesses reduce their energy costs with tools, coaching, and technical resources to support energy goals through a year-long series of workshops and one-on-one coaching. Draws on the principles of continuous improvement, other cost savings, and operational excellence initiatives. The offering helps implement behavior changes and systematic practices that can lead to significant energy and cost savings. In the five-year program plans, this offering will be fall under the EnergyWise for Your Business expanded program.

Program Assumptions

This section describes how ICF developed key assumptions for programs, including costs, participation rates, and NTG ratios.

Program Costs

ICF estimated program costs to reflect average annual costs over the long run; incentive and non-incentive program cost estimates were developed. Incentives are program payments to customers, contractors, retailers, or manufacturers that lower the cost of efficient products and services and may include the installation of measures, when appropriate. Non-incentive costs include administration, marketing, education and training, and evaluation costs. ICF did not estimate individual non-incentive cost categories for this study. Costs in the current programs scenario were generally based on existing DESC program costs. Expanded versions of existing programs in the expanded case typically had higher incentive levels and higher non-incentive costs to cover additional outreach and program delivery. Costs for new programs in the expanded case were developed using historical program spending and by ICF through secondary research and program implementation experience. Cost estimates by program appear in the respective portions of Section 5, Achievable Energy Efficiency Potential below.

Participation

A participation rate is the percentage of eligible stock or applicable customer population predicted to install an efficiency measure each year. The approach to developing participation rates in this potential study was similar to the approach used in most utility potential studies. It involves:

- 1. Developing a maximum market acceptance rate, or S_{max} , which is the maximum annual participation rate for a given measure.
- 2. Estimating a participation rate in Year 1 of the forecast.
- 3. Developing a ramp-up schedule from Year 1 to the year in which S_{max} is predicted to occur.
- 4. Forecasting participation for the years after the year in which S_{max} is expected to be achieved.

The shape of a participation curve can take a variety of forms, depending on the nature of the measure, the program in which it is being delivered, the relevant market barriers, baseline changes, and the size and nature of the eligible stock. ICF assessed achievable participation on a measure-by-measure basis. Because such a wide variety of measures is included in this study, one formulaic approach to estimating program participation could not be applied for all measures. Each measure



was put in a group² with similar measures for assigning participation approaches and payback curves; these assignments are shown in Appendix C.

Participation rate estimates for the current programs scenario were based largely on current DESC program performance, accounting for the impact of adopted federal standards. Participation rates in the expanded case were developed using:

- 1. Primary research conducted by Opinion Dynamics Corporation in DESC's service area on customer market barriers and acceptance rates at different incentive levels,
- 2. Benchmarking of similar programs, typically from the South Census region,
- 3. Payback acceptance rates, and
- 4. ICF expert input.

Participation Approach A

This approach to estimating participation combines research on customers' financial decision making with research on the diffusion of innovative technologies in the marketplace.

One way that programs motivate customers to participate is by improving the financial attractiveness of the efficient option over the standard, or baseline, option. Financial attractiveness in Approach A is a function of how much the incentive lowers customer simple payback. Customer payback is the amount of time it takes for a customer to recover the costs of investing in the efficient unit instead of the standard unit. Customer payback equals the difference in cost between the efficient and standard units (commonly known as the incremental cost) divided by the utility bill savings due to the efficient unit.³ Payback before the incentive is applied is calculated as:

³ Incremental costs include the difference in the cost of equipment, labor and operations, and maintenance.



Most programs have multiple measure groupings, or bundles. Some, such as the Home Energy Reports program, only have one group.
 Incremental costs include the difference in the cost of equipment, labor and operations, and

PRE-INCENTIVE CUSTOMER PAYBACK (YEARS) = INCREMENTAL COST ÷ UTILITY BILL SAVINGS

And payback after the incentive is applied is calculated as:

POST-INCENTIVE CUSTOMER PAYBACK (YEARS) = (INCREMENTAL COST - INCENTIVE COST) ÷ UTILITY BILL SAVINGS

Incentive levels for measures included in the study that are also currently offered by DESC were estimated based on DESC's current incentive levels; feedback from market actors in the DESC service territory, including contractors and distributors; and ICF expert judgment. Incentive levels for measures not currently offered by DESC were initially estimated based on measure simple payback and adjusted on a case-by-case basis by ICF program experts. Incentive levels ranged from 25% to 100% of measure incremental costs, with incentive levels for most measures falling between 25% and 75% of measure incremental costs. Notable exceptions are the Neighborhood Energy Efficiency program, low-income and multifamily direct install measures, and the new Municipal Lighting program, which all have incentive levels at 100% of incremental measure cost. An incentive calculation for an illustrative measure is shown in Table 5.4

For this illustrative measure, the payback target is two years, the pre-incentive payback is 5.2 years (row g), and the post-incentive payback is two years (row m). Not all incentives bring down the payback to two years. This occurs when the maximum incentive is reached, when the pre-incentive payback is already less than two years, or when the incentive would need to be greater than the incremental cost to bring the payback down to two years.

Table 5. Illustrative Measure Incentive Calculations

Variable		Value	Source or Calculation
а	Retail Electricity Rate – kWh	\$0.094	DESC
b	Retail Capacity Charge – kW	\$5.847	DESC
	Base Measure Lifetime	10	DESC program evaluation
С	Total Incremental Cost	\$100	Market review
d	Annual kWh Savings	180	DESC program evaluation
е	Annual kW Summer-Peak Savings	0.104	DESC program evaluation
f	Annual Bill Savings	\$19.35	$(a \times e) + (b \times d)$
g	Pre-Incentive Payback (years)	5.2	c/f
Incentive Assumptions			
h	Minimum Incentive Level	25%	Assumption
i	Maximum Incentive Level	75%	Assumption
j	Post-Incentive Payback Target (years)	2.0	Assumption
k	Incentive as a % of Incremental Cost	62%	MAX [MIN (i, 1 – j / g), h]
1	Incentive	\$62	k×c
m	Post-Incentive Payback (years)	2.0	(c – l) / f

Incentives are used to calculate program costs and to forecast participation. ICF uses the post-incentive payback to estimate the fraction of customers who may choose the efficient unit over the standard unit. This estimation was done using payback acceptance curves, an example of which is


⁴ Values indicated in Table 5 are generic and are only shown to demonstrate the approach. The values should not be construed as the actual assumptions used in this study. Actual assumptions are noted as such in the body of this report and in Appendix D.



shown in Figure 2. Different payback curves were utilized for each sector. All payback curves utilized in this study are shown in Appendix C.

The curve below plots the results from residential surveys on payback acceptance.⁵ The curve shows that 68% of eligible residential customers stated that they are willing to accept a two-year measure payback. However, people tend to overstate their payback acceptance in surveys, which is known as survey response bias. When customers are making actual decisions about installing equipment, they are usually willing to accept much shorter payback levels than they stated they would in a survey.

Figure 2. Illustrative Payback Acceptance Curve

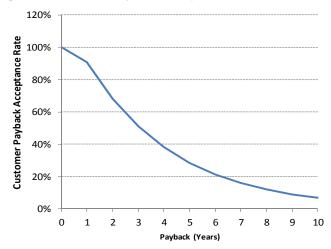

In Approach A, three variables determine the shape of the participation curve for a measure. Illustrative values are shown in Table 6:

- 1. *Maximum market acceptance rate*, or S_{max}, is used to estimate the maximum annual participation rate.⁶
- 2. Ramp-up rate is used to estimate the first-year participation.
- 3. *Ramp-up* shape is applied to reflect how quickly a program could reach the maximum annual participation rate.

The maximum annual market acceptance $(S_{max})^7$ is the product of the customer-stated payback acceptance and the program market acceptance rate:

MAXIMUM ANNUAL MARKET ACCEPTANCE RATE $(S_{MAX}) = CUSTOMER-STATED PAYBACK ACCEPTANCE X PROGRAM MARKET ACCEPTANCE RATE$

Moreover, the first-year participation rate is the maximum annual market acceptance rate divided by the ramp-up rate. To summarize:

FIRST-YEAR PARTICIPATION RATE =

MAXIMUM ANNUAL MARKET ACCEPTANCE RATE ÷ PROGRAM RAMP-UP RATE

⁷ The highest estimated level of program market penetration in each year.



15

⁵ Multiple pay-back acceptance surveys were conducted prior to this study and may include some outside of DESC's service area.

⁶ The program participation rate in the year the program reaches maturity.

Variable		Value	Source or Calculation
а	Customer States Payback Acceptance	68%	Payback Acceptance Calculation
b	Program Market Acceptance Rate	30%	
С	Ramp-up Rate (years)	5	
d	Ramp-up Shape	100%	
е	Program Start Year	2020	
f	Study Period (years)	20	
First-Yea	r Participation Estimates		
g	Maximum Annual Market Acceptance (S _{MAX})	20.4%	b × a
h	First-Year Share of Installations (S ₀)	4.1%	g / c

Table 6. Illustrative Market Diffusion Assumptions

Figure 3 illustrates the outcome of Approach A. Program participation in the first year is 4%. The participation rate in each year grows until it reaches the maximum estimated level of 20%. Increasing the ramp-up shape steepens the curve, and decreasing it makes the curve more gradual. This figure is an example of "market diffusion," or an S-curve.

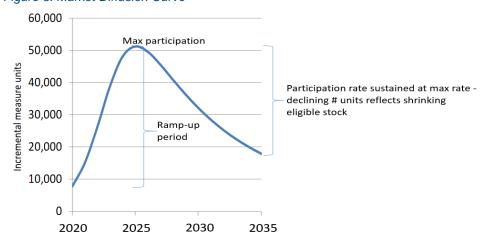


Figure 3. Market Diffusion Curve

This approach to modeling DSM program participation is only applicable to measure and program types where payback acceptance is relevant to customer financial decision making.

Participation Approach B

Participation Approach A, described above, is not applicable to energy efficiency measure and program types where payback acceptance is a less relevant proxy for customer financial decision making. This is the case for home energy audit programs, for example, where the participation and implemented measures are not purchase decisions. Nor does the payback acceptance survey data apply to customer decisions about participating in demand response programs. For such measures, Approach B was used – participation rates were individually input for each year based on program experience. Participation approaches by measure type are documented in Appendix D.

Net-to-Gross Ratios

Program evaluators use different evaluation methods, such as randomized control trials (RCTs) and quasi-experimental designs, surveys, market sales data analysis, or case studies, to estimate the net program savings associated with energy efficiency programs. The ratio of net savings to gross savings is called the program NTG ratio. Gross savings are changes in energy consumption that



result directly from program-related actions taken by participants of an energy efficiency program, regardless of why they participated. Net savings refer to changes in energy use that are attributable to a particular energy efficiency program. These changes may implicitly or explicitly include the effects of free-ridership,⁸ spillover,⁹ and induced market effects.¹⁰ Applying the NTG ratio to gross savings results in net savings.

NTG ratios for all measures and programs that are currently offered by DESC were estimated based on DESC program impact evaluation results. NTG ratios for new measure types and programs were estimated by ICF based on program implementation experience.

Scenario Development

ICF forecasted achievable energy efficiency potential under two scenarios, which are defined in the points that follow. ICF first developed the current programs estimates by measure for each program using the approaches described previously; then the estimates for the expanded programs were developed.

- ▶ **Current programs** Where DESC programs were modeled based on program designs implemented and performance achieved by DESC through Program Year 7.
- ▶ **Expanded programs** Includes programs in the current programs scenario, some modified or expanded, plus new programs that have been successful in other, similar utility territories.

The names of the current programs (included in both scenarios) and new best practice programs (included only in the expanded programs scenario) are shown below in Table 7.

National Renewable Energy Laboratory, Chapter 17, Estimating Net Savings: Common Practices, September 2014, https://energy.gov/sites/prod/files/2015/01/f19/UMPChapter17-Estimating-Net-Savings.pdf



⁸ "Free ridership" is the program savings attributable to free-riders (program participants who would have implemented a program measure or practice in the absence of the program).

⁹ Spillover refers to additional reductions in energy consumption or demand that are due to program influences beyond those directly associated with program participation. As a result, these savings may not be recorded in the program tracking system and credited to the program.

Table 7. Potential Study Scenario Programs, by Customer Sector

Current Scenario	Expanded Scenario
Residential Existing Program(s) Appliance Recycling Heating & Cooling Home Energy Check-up Home Energy Report Neighborhood Energy Efficiency Program EnergyWise Savings Store (Online)	Residential New Program(s) Multifamily New Offering(s) Water Heating Expanded Program(s) Appliance Recycling Heating & Cooling Home Energy Check-up Home Energy Report Neighborhood Energy Efficiency Program EnergyWise Savings Store (Online)
Commercial • Existing Program(s) • EnergyWise • Small Business	Commercial New Program(s) Municipal Lighting Expanded Program(s) EnergyWise Small Business
Industrial • Existing Program(s) • Industrial Efficiency	Industrial New Offering(s) Industrial Strategic Energy Management Existing Program(s) Industrial Efficiency

Assumptions about customer preferences and decision-making criteria, utility assumptions (e.g., avoided costs, discount rates), and exogenous economic factors (e.g., growth, inflation) were all held constant for both scenarios.

Residential Program Differences

Of the programs targeting the residential sector, most of the changes in the expanded case are an increase in participation, increase in incentive, or the addition of select measures. Beyond this, there are two new programs – Multifamily Program and Water Heating program/offering— and the change in the Home Energy Report program from an opt-in to an opt-out design. A list of the changes for the residential sector programs is in Table 8 below.



Table 8. Current and Expanded Scenario Residential Program Differences

Current Programs scenario	Expanded Programs scenario	Key differences in Expanded scenario				
Appliance Recycling	Appliance Recycling	Expanded participation				
Heating & Cooling	Heating & Cooling	Higher incentives; electric resistence heating -> Air Source Heat Pump (ASHP) measures added				
Home Energy Check-up	Home Energy Check-up	Tier 2 measures added; additional direct install measures				
Home Energy Reports	Home Energy Reports	Opt-out beginning 2023				
Neighborhood Energy Efficiency Program	Neighborhood Energy Efficiency Program	Expanded participation				
Online store	ENERGY STAR® Lighting	Smart thermostats				
	Multifamily	New program				
	Water Heating	Heat Pump Water Heater (HPWH) focus; higher incentives (to be offered under Heating & Cooling)				

Commercial Program Differences

Both existing programs targeting the commercial sector have increased incentives and greater participation in the expanded scenario. In addition, the EnergyWise for Your Business program has additional measures targeting the agricultural subsector, and a new program was added for municipal lighting (Table 9).

Table 9. Current and Expanded Scenario Commercial Program Differences

Current Programs scenario	Expanded Programs scenario	Key differences in Expanded scenario
EnergyWise for Your Business - Commercial	EnergyWise for Your Business - Commercial	Added Agricultural offering element; Higher incentives & expanded participation for lighting, other end uses
Small Business	Small Business	Higher incentives; expanded participation
	Municipal LED Lighting	New program

Industrial Program Differences

The existing program targeting the industrial sector is unchanged in the expanded scenario; however, there is a new program offering added targeting small and medium enterprises with assistance, financial and technical, for strategic energy management (Table 10).



Table 10. Current and Expanded Scenario Industrial Program Differences


Current Programs scenario	Expanded Programs scenario	Key differences in Expanded scenario
EnergyWise For Your Business - Industrial Efficiency	EnergyWise For Your Business - Industrial Efficiency	None
	Strategic Energy Management	New offering (to be included within EnergyWise For Your Business)



4. UTILITY SERVICE AREA CHARACTERISTICS


Electricity use in the DESC service area is 36% residential, 34% commercial, and 27% industrial (Figure 4).

Figure 4. Share of Total Estimated DESC Retail GWh Sales in 2019, by Customer Class

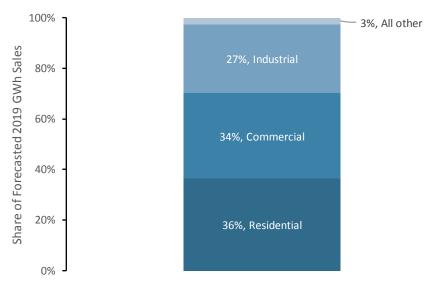

While the distribution of sales may suggest similar scale savings and programs targeting each sector, the distribution of customers who have opted-out of participating in the energy efficiency programs means that the possible industrial savings and programs targeting that sector will be significantly smaller (Figure 5). Customers accounting for 84% of industrial sales and 5% of commercial sales have opted-out.

Figure 5. Opted-out vs. Not Opted-out Sales in 2019, by Customer Class

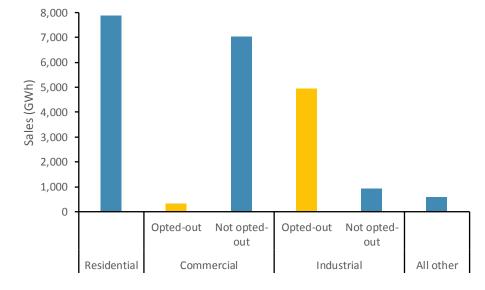




2036

2035

2037

2038

In the base case,¹¹ the total load is forecasted to grow 18% during the forecast period (using a 2019 baseline),¹² as shown in Figure 6. The compound annual growth rate (CAGR) over the same period is 0.9%, driven largely by a 1.3% CAGR in the residential sector.

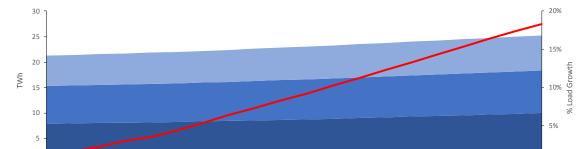

2028 2029 2030

Figure 6. System Load (left axis) and Load Growth (right axis) in the Base Case

2026

2027

■ Commercial

Residential Characteristics

2023 2024

■ Residential

2021 2022

Single-family homes are a large majority of the residential building stock. This means that targeted residential efficiency programs would be expected to focus on this subsector. Forty-eight percent of homes have a heat pump, and another 42% have central air conditioning; 10% of homes have heating but no air conditioning. Most homes have an electric water heater (67%). Figure 7 shows home types and home HVAC configurations.¹³


2031

Industrial

2033 2034

Load growth

Figure 7. Distribution of Home Types and Home HVAC Types in the DESC Service Area (Total: 626,687 homes)

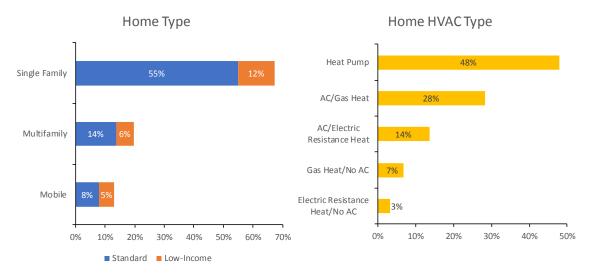

¹³ DESC Residential Appliance Saturation Survey, ODC, 2018; ICF assumptions.



¹¹ The base case is the load as forecasted by DESC for the forecast period (2020–2029) prior to the energy efficiency potential forecast conducted in this study.


¹² Calculated as the compound annual growth rate (CAGR) over the 2020–2029 period.

Commercial Characteristics

Approximately three out of five, or 64%, of commercial accounts are categorized as small, based on the qualifications for the Small Business Program (customers with five or fewer DESC electric accounts and an annual energy use of 350,000 kWh or less). Small offices account for 4% of all C&I customer usage, retail accounts for 3%, restaurants account for 2%, and other services account for 2%. The uncategorized small customer account for 12% of total C&I usage.


Thirty-six percent of commercial accounts are categorized as large customers, with energy usage of more than 350,000 kWh annually or more than five electric accounts. As with small customers, offices (20%) are the most common large commercial building type, followed by higher education (10%), medical (9%), wholesale trade (8%), schools (7%), retail (6%), restaurants, and lodging (4% each). Figure 8 shows share of usage for large and small commercial customer types.



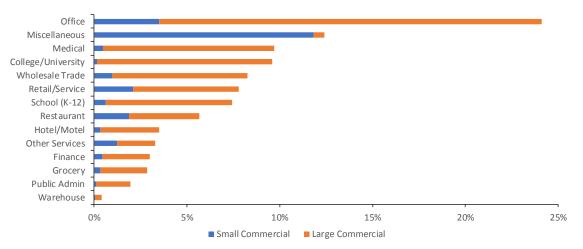

A group that was broken out from the miscellaneous category is agricultural customers (Figure 9). This category of customer is largely irrigation pumping (58%); however, there also are a significant number of other agricultural customers. The largest of these is poultry (32%), followed by dairy (9%), and finally a small number of swine producers (2%).

Figure 9. Agricultural Customer Count

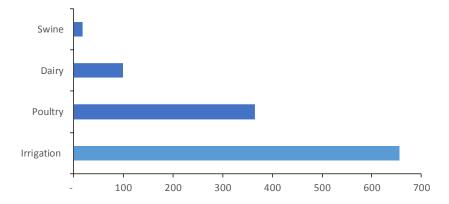



Industrial Characteristics

The food production and transportation equipment industries account for 34% of total industrial energy use, followed by small industrial (15%), plastic and polymers (11%), and machinery (10%). Machine drive applications consume 45% of electric energy in large industrial facilities, and 22% is used in process heating and cooling. The combined share of electricity used by facility lighting and facility HVAC is 25% in large industrial plants, and 16% in small industrial plants; industrial achievable potential within these end-uses is relatively high because these efficiency measure types are lower risk than measures affecting production processes. Figure 10 shows the distribution of industrial electricity use by subsector, and Table 11 shows industrial electricity use by end-use in small and large industrial facilities.



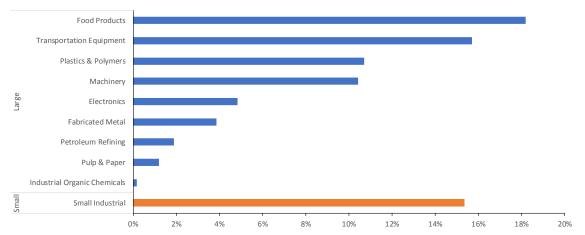


Table 11. Industrial Electricity Use, by End-use (Total: 983 GWh)

% kWh Use	Large Industrial	Small Industrial
Machine Drive	44%	52%
Pumps	11%	14%
Fans	6%	8%
Compressed Air	6%	9%
Motor - Other	21%	22%
Process Heating	12%	11%
Process Cooling	11%	7%
Other Process Uses	3%	2%
Electro-Chemical	4%	9%
Facility HVAC	15%	10%
Facility Lighting	10%	6%
Other Non-Process Use	2%	2%

¹⁵ Small facilities are defined as customers in the Small General Service rate class.



24

¹⁴ Based on Standard Industrial Classification data provided by DESC and U.S. Energy Information Administration Manufacturing Energy Consumption Survey (MECS) data for South Carolina.

5. ACHIEVABLE ENERGY EFFICIENCY POTENTIAL

Portfolio Results


Incremental Energy Savings

In the expanded programs scenario, annual savings achieved by DESC programs grow to 1.6 times the savings achieved by DESC programs in PY7, in 2017–2018. Annual, or "incremental," savings are achieved in a program year from measures installed or implemented by programs during that same year. The growth in annual savings is due to increased budgets

Incremental savings grow to 1.6 times that of PY7 savings.

for existing DESC programs, and to savings achieved by new (expanded) programs, which contribute to a doubling of savings compared with the current programs scenario level in 2022.

Figure 11. Incremental and Cumulative Portfolio Energy Savings

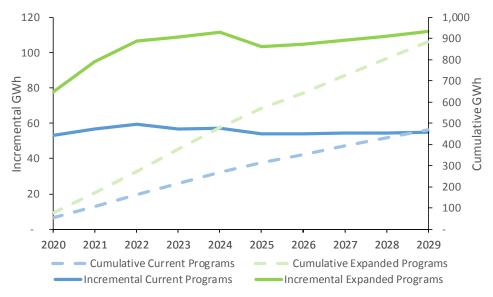

Cumulative Energy Savings

Cumulative savings grow from 77 GWh in 2020 to nearly 883 GWh by 2029 in the expanded programs scenario (Figure 11). Cumulative savings include the savings achieved in one program year plus savings from measures installed in previous program years that are still functioning. These savings are approximately 5.2% of all energy sales from

Cumulative savings offset up to 5.2% of forecasted sales.

participating customers. This calculation, shown annually in Table 12, excludes the forecasted sales from opt-out customers.

Table 12. Forecasted MWh Savings as a Percentage of Previous Year Sales

Portfolio Savings	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Incremental (Annual)										
Current Program Scenario	0.3%	0.4%	0.4%	0.4%	0.4%	0.3%	0.3%	0.3%	0.3%	0.3%
Expanded Program Scenario	0.5%	0.6%	0.7%	0.7%	0.7%	0.6%	0.6%	0.6%	0.6%	0.7%
Cumulative										
Current Program Scenario	0.3%	0.7%	1.0%	1.3%	1.6%	1.9%	2.1%	2.3%	2.6%	2.8%
Expanded Program Scenario	0.5%	1.1%	1.7%	2.3%	3.0%	3.5%	3.9%	4.3%	4.8%	5.2%



Portfolio Cost-Effectiveness

The full portfolio of programs, as well as the portfolio of each customer sector, is cost-effective in both scenarios, as shown by the TRC ratios in Table 13 and Table 14. TRC benefits include all energy and capacity savings over the lifetime of the measures installed by the programs. TRC costs include program non-incentive costs and measure incremental costs.

Individual program bundles per customer class, as well as the full portfolio, remain costeffective by design.

Table 13. Current Scenario Customer Class Benefit-Cost Ratio Results

Benefit-Cost Rati	os TRC	PAC	RIM	PCT
Residential	2.4	1.3	0.3	3.5
Commercial	1.8	2.6	0.4	3.1
Industrial	1.4	1.7	0.5	6.2
Portfoli	o Total 1.9	2.1	0.4	3.2

In the expanded programs scenario, TRC benefits outweigh TRC costs by a factor of 1.8. This is down from the ratio in the current case but is still very beneficial for the total system of individuals in the DESC territory.

Table 14. Expanded Scenario Customer Class Benefit-Cost Ratio Results

Benefit-Cost Ratios	TRC	PAC	RIM	PCT
Residential	1.7	1.2	0.3	3.2
Commercial	1.9	1.9	0.4	3.3
Industrial	1.4	1.7	0.5	6.2
Portfolio Total	1.8	1.6	0.4	3.3

To summarize, there is significant cost-effective, achievable savings potential in the residential, commercial, and industrial sectors in the DESC service area. The residential savings are expected to move away from lighting and toward more complete shell measures as well as new measures and increases in existing incentives to promote the installation of ENERGY STAR® heating and cooling equipment. Commercial program savings will be increased by expanding further into the small commercial sector. The potential in the industrial sector is lower, but there is still room for expansion above current programs performance, which could be achieved by the addition of program elements such as Strategic Energy Management.

Levelized Cost of Energy Savings

In the current scenario, the levelized cost for all customer class-focused programs is lower than the avoided cost of energy (Table 15). Thus, the full portfolio of programs has a levelized cost of energy saved that is firmly below the avoided cost of energy.

The levelized cost of energy is the net present value of the full program costs divided by the net present value of the cumulative lifetime savings from all the measures from the program. On the other hand, the annual cost of energy is the sum of all program costs divided by the incremental program savings. This means that the levelized cost takes into account all savings from the program, as well as being in real dollars, while the annual cost is in actual dollars and only considers first-year savings.

Potential efficiency savings are cheaper than standard generation.



Table 15. Current Scenario Annual and Levelized Cost of Energy Saved, by Sector

Cost of Energy Savings (\$/kWh)		Levelized \$/kWh			
Residential	\$ 0.27	\$	0.042		
Commercial	\$ 0.18	\$	0.021		
Industrial	\$ 0.23	\$	0.027		
Portfolio Total	\$ 0.20	\$	0.026		

In the expanded case, the commercial programs collectively have a higher levelized cost; however, it is still below that of the avoided cost of energy, while the residential portfolio levelized cost rises even higher (Table 16). Only the industrial programs continue to have a very low levelized cost. However, this does not take into account the demand savings, which are in addition to the energy savings. Despite the rising costs, all programs, as well as the combined portfolio, have lower levelized cost of energy than the system-wide avoided energy cost.

Table 16. Expanded Scenario Annual and Levelized Cost of Energy Saved, by Sector

Cost of Energy Savings (\$/kWh)		Levelized \$/kWh			
Residential	\$ 0.34	\$	0.047		
Commercial	\$ 0.23	\$	0.028		
Industrial	\$ 0.23	\$	0.027		
Portfolio Total	\$ 0.26	\$	0.033		

In Table 17 and Table 18, the annual program costs, in millions, are shown. These include all program costs, including incentive and non-incentive costs. These costs are not cumulative, but are instead the estimated costs that are due to that program during that year.

Table 17. Current Scenario Total Annual Program Costs

Program Costs (\$M)	2020		2020 2021		2022		2023		2024		2025		2026		2027		2028		2029	
Residential	\$	4.7	\$	4.8	\$	4.9	\$	4.2	\$	4.2	\$	3.1	\$	3.2	\$	3.2	\$	3.2	\$	3.2
Commercial	\$	5.9	\$	6.5	\$	6.9	\$	7.0	\$	7.1	\$	7.1	\$	7.2	\$	7.2	\$	7.2	\$	7.3
Industrial	\$	0.3	\$	0.3	\$	0.4	\$	0.4	\$	0.4	\$	0.3	\$	0.3	\$	0.3	\$	0.3	\$	0.3
Portfolio Total	\$	11.0	\$	11.6	\$	12.2	\$	11.6	\$	11.7	\$	10.6	\$	10.6	\$	10.7	\$	10.7	\$	10.8

Table 18. Expanded Scenario Total Annual Program Costs

Program Costs (\$M)	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Residential	\$ 9.4	\$ 10.4	\$ 11.0	\$ 10.6	\$ 10.8	\$ 8.9	\$ 9.0	\$ 9.1	\$ 9.2	\$ 9.2
Commercial	\$ 12.5	\$ 16.3	\$ 18.7	\$ 19.2	\$ 19.1	\$ 15.6	\$ 15.9	\$ 16.3	\$ 16.7	\$ 17.1
Industrial	\$ 0.3	\$ 0.3	\$ 0.4	\$ 0.4	\$ 0.4	\$ 0.3	\$ 0.3	\$ 0.3	\$ 0.3	\$ 0.3
Portfolio Total	\$ 22.3	\$ 27.0	\$ 30.1	\$ 30.2	\$ 30.2	\$ 24.8	\$ 25.2	\$ 25.6	\$ 26.1	\$ 26.6



Residential Sector Results Incremental Energy Savings

In the current scenario, Home Energy Reports Program is the largest residential savings opportunity, with plans to expand the program by changing to an opt-out offering. While residential programs savings have historically been driven by CFLs and LEDs, federal minimum energy performance standards for general service lamps (the Energy Information and Security Act of 2007, or EISA 2007) have gradually decreased the ability of programs to provide incentives for efficient standard screw-in light bulbs.

The Home Energy Report program triples in the expanded programs scenario. In the expanded scenario, there are many significant opportunities to

RECENT DEVELOPMENTS IN THE FEDERAL MINIMUM ENERGY PERFORMANCE STANDARDS FOR GENERAL SERVICE LIGHTING

There has been much discussion in the energy efficiency industry about the definitions that the U.S. Department of Energy (DOE) released in January 2017, which revised the definition of a general service lamp (GSL), or light bulb, which would have expanded the scope of bulb types that are subject to efficiency standards. Those revised definitions had an effective date of January 1, 2020. DOE made an announcement on February 6, 2019, about a proposal to withdraw those definitional changes. In summary:

- DOE issued a pre-publication notice of proposed rulemaking for the definition of a light bulb on February 6, 2019.
- If it is approved, bulb types currently excluded from efficiency standards will continue to be excluded; essentially, only standard 40, 60, 75, 100 watt (W) A-lamps will continue to be subject to efficiency standards.
- Utility programs would continue to have viability for most specialty bulbs since the bulb types would not be subject to efficiency standards.
- 4. There is still uncertainty around the efficiency standard, as DOE has not decided whether the backstop will go into effect for the bulb types that meet the definition of a GSL. This means an efficacy standard of 45 lumens per watt (lm/W), effective January 1, 2020, is still unknown.

improve the energy efficiency of the shell measure of existing homes in South Carolina, which can be delivered through the Home Energy Check-up (HEC) program. This program has both the largest total savings increase and the greatest potential for expansion given the current program scale (Figure 12). Overall, the newly expanded programs could increase residential sector savings by up to 40%, driven largely by the addition of the new Multifamily program.

Figure 12. Net Residential Incremental MWh Savings in 2024, by Program





In addition, Home Energy Reports (HER) can be easily scaled to increase incremental savings. The program has been run as an opt-in program, which means that people choose to participate. In the expanded scenario, the program design was changed to opt-out by 2023. The program design switches to an opt-out model where one-half of the top quartile of energy users receive an HER. This results in approximately double the current participation level. However, for this behavioral program, a measure life of one year is assumed, which means that savings do not accumulate over time as they do with equipment measures. Therefore, the program is more effective in helping to meet short-term energy-savings goals, rather than meeting long-term resource needs.

The growth of the HEC program in the expanded case is based on the benchmarking of home performance type programs in the South Census region. Comparing DESC's current program to this reference class of programs indicated that DESC's program has room to grow, primarily through the focus on existing homes by the addition of building shell measures (Figure 13). The shell measures could include a wide range of insulation, such as attic knee wall, radiant barrier, wall insulation, and attic access covers, as well as air sealing and window film.

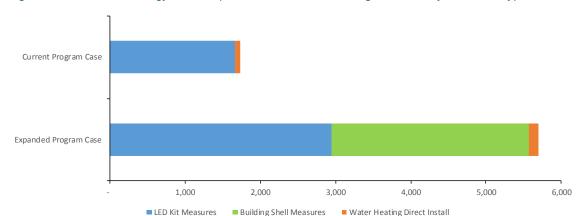


Figure 13. Net Home Energy Check-up Incremental MWh Savings in 2024, by Measure Type

The Multifamily offerings could quickly achieve significant savings from "low-hanging fruit" such as in-unit and common area LEDs, as well as other direct install measures, including in-unit LEDs and in-unit water conservation measures (Figure 14). By targeting property owners and managers, this program can ramp up quickly based on an average of seven units per building. The program also has a large sector to target, with roughly 94,000 multifamily customers comprised of approximately 13,000 common area accounts and 81,000 residential multifamily accounts.



2,500 - 1,500 - 1,000 - 1,000 - Common area In-unit DI Water In-unit DI LEDs Common area LED lamps & fixtures

Figure 14. Net Multifamily Incremental MWh savings in 2024, by Measure Type

Cumulative Energy Savings

In 2023, the federal minimum energy performance standard increases from SEER 14 to SEER 15. This has a significant impact on the residential sector savings and specifically the Heating and Cooling program savings (Figure 15).

The federal standards change results in a two-thirds decrease in Heating and Cooling program savings in later years.

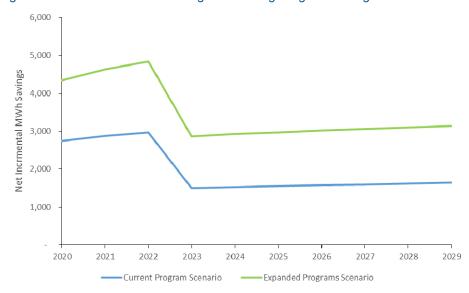


Figure 15. Total Incremental Heating and Cooling Program Savings

This is complimentary to the assessment of the likely date for implementation of the Tier 2 federal minimum energy performance standard for general service lamps. Together, these result in a sharp decrease in the savings from the entire residential portfolio (Figure 16). The reduction leads to an assumed phase-out of direct installation of LED bulbs after 2024. There is an uptick in the savings from the residential programs in the expanded case, starting in 2023, from the conversion of the Home Energy Report from an opt-in approach to an opt-out model.



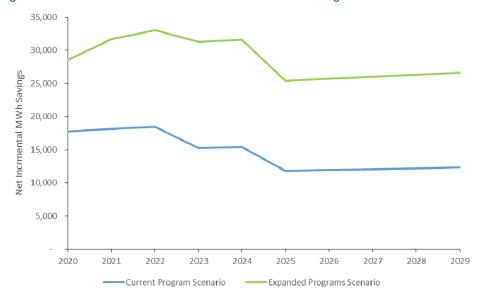


Figure 16. Net Incremental Residential Portfolio MWh Savings

Program Cost-Effectiveness

The residential portfolio of programs is cost-effective in both scenarios, as shown by the TRC test in Table 19 and Table 20. Of both the residential portfolio and the overall portfolio, the EnergyWise Savings (Online) Store has the highest cost-effectiveness. The programs' TRC benefits outweigh TRC costs by a factor of between 8 and 10. This high ratio of benefits to cost helps ensure that the overall portfolio of residential programs is also cost-effective, despite other programs not performing nearly as well, although none of the existing programs has a TRC ratio lower than 1.0.

The residential portfolio of programs is highly cost-effective and is driven by the Online Store followed by the Neighborhood Energy Efficiency program.

Table 19. Current Scenario Residential Portfolio Cost-Effectiveness Results

Benefit-Cost Ratios	TRC	PAC	RIM	PCT
Appliance Recycling	1.1	0.9	0.2	12.4
Heating & Cooling	1.0	1.6	0.4	1.5
Home Energy Check-up	1.7	0.5	0.2	3.3
Home Energy Reports	1.4	0.4	0.2	High
Neighborhood Energy Efficiency	5.2	2.1	0.3	6.7
Online Store	9.8	5.5	0.3	4.7
Residential Total	2.4	1.3	0.3	3.5



Table 20. Expanded Scenario Residential Portfolio Cost-Effectiveness Results

Benefit-Cost Ratios	TRC	PAC	RIM	PCT
Appliance Recycling	1.1	0.9	0.2	12.4
Heating & Cooling	1.0	1.5	0.4	1.7
Home Energy Check-up	1.0	8.0	0.3	2.4
Home Energy Reports	1.9	0.3	0.2	High
Neighborhood Energy Efficiency	5.2	2.1	0.3	6.7
Online Store	8.1	4.5	0.3	4.4
Water Heating	0.7	1.0	0.2	2.2
Multifamily	2.0	1.6	0.3	4.4
Residential Total	1.7	1.2	0.3	3.2

Levelized Cost of Energy Savings

Of the residential programs in the current scenario, the Home Energy Check-up and Home Energy Report programs have the highest levelized cost and are both above the avoided energy cost (Table 21). This is due to the high upfront cost of the building shell measures in the Home Energy Check-up and the short lifetime of the savings from the Home Energy Report program. On the other hand, the Online Store and Neighborhood

High costs from dominant programs drive the residential levelized cost of energy higher, although it is still cheaper than standard generation.

Energy Efficiency programs, which have much lower levelized costs, have longer lifetimes for their savings, as well as very low non-incentive costs. The fact that most of the residential savings come from the Home Energy Check-up and the Home Energy Report programs results in the total levelized cost for the residential programs being higher, although it is still lower than the avoided energy cost.

Table 21. Current Scenario Residential Annual and Levelized Cost of Energy Saved, by Program

Cost of Energy Savings (\$/kWh)	nnual 'kWh	velized /kWh
Appliance Recycling	\$ 0.35	\$ 0.049
Heating & Cooling	\$ 0.68	\$ 0.058
Home Energy Check-up	\$ 0.38	\$ 0.085
Home Energy Reports	\$ 0.18	\$ 0.178
Neighborhood Energy Efficiency	\$ 0.18	\$ 0.021
Online Store	\$ 0.07	\$ 0.008
Residential Total	\$ 0.27	\$ 0.042

While the new residential programs in the expanded scenario have a relatively low levelized cost of energy saved, the expansion of some of the existing programs increases their levelized cost (Table 22). The results are a higher overall levelized cost of energy savings for the residential programs in the expanded case; however, the total is still lower than the system-wide avoided energy cost.



Table 22. Expanded Scenario Residential Annual and Levelized Cost of Energy Saved, by Program

Cost of Energy Savings (\$/kWh)	nnual 'kWh	Levelized \$/kWh			
Appliance Recycling	\$ 0.35	\$	0.049		
Heating & Cooling	\$ 0.60	\$	0.052		
Home Energy Check-up	\$ 0.67	\$	0.079		
Home Energy Reports	\$ 0.20	\$	0.196		
Neighborhood Energy Efficiency	\$ 0.18	\$	0.021		
Online Store	\$ 0.09	\$	0.009		
Water Heating	\$ 0.42	\$	0.045		
Multifamily	\$ 0.26	\$	0.030		
Residential Total	\$ 0.34	\$	0.047		

In Table 23 and Table 24, the annual program costs for each residential program are displayed in millions of dollars.

Table 23. Current Scenario Total Annual Residential Program Costs

Program Costs (\$M)	2	020	2	021	2	022	2	023	2	024	2	025	2	026	2	027	2	028	2	029
Appliance Recycling	\$	8.0	\$	0.8	\$	0.8	\$	0.8	\$	0.8	\$	8.0	\$	8.0	\$	0.7	\$	0.7	\$	0.7
Heating & Cooling	\$	1.7	\$	1.8	\$	1.8	\$	1.1	\$	1.1	\$	1.1	\$	1.1	\$	1.1	\$	1.2	\$	1.2
Home Energy Check-up	\$	0.7	\$	0.7	\$	0.7	\$	0.7	\$	0.7	\$	-	\$	-	\$	-	\$	-	\$	-
Home Energy Reports	\$	0.5	\$	0.5	\$	0.5	\$	1.0	\$	1.0	\$	1.0	\$	1.0	\$	1.1	\$	1.1	\$	1.1
Neighborhood Energy Efficiency	\$	0.6	\$	0.6	\$	0.6	\$	0.6	\$	0.6	\$	0.2	\$	0.2	\$	0.2	\$	0.2	\$	0.2
Online Store	\$	0.4	\$	0.4	\$	0.4	\$	0.0	\$	0.1	\$	0.1	\$	0.1	\$	0.1	\$	0.1	\$	0.1
Residential Total	\$	4.7	\$	4.8	\$	4.9	\$	4.2	\$	4.2	\$	3.1	\$	3.2	\$	3.2	\$	3.2	\$	3.2

Table 24. Expanded Scenario Total Annual Residential Program Costs

Program Costs (\$M)	2	020	2	021	2	022	2	2023	2	2024	2	025	2	026	2	027	2	028	2	029
Appliance Recycling	\$	1.0	\$	1.0	\$	1.0	\$	1.0	\$	1.0	\$	1.0	\$	0.9	\$	0.9	\$	0.9	\$	0.9
Heating & Cooling	\$	2.7	\$	2.8	\$	2.8	\$	1.7	\$	1.7	\$	1.8	\$	1.8	\$	1.8	\$	1.8	\$	1.9
Home Energy Check-up	\$	2.5	\$	3.0	\$	3.3	\$	3.5	\$	3.5	\$	2.4	\$	2.4	\$	2.5	\$	2.5	\$	2.5
Home Energy Reports	\$	0.5	\$	0.5	\$	0.5	\$	1.7	\$	1.7	\$	1.7	\$	1.7	\$	1.7	\$	1.8	\$	1.8
Neighborhood Energy Efficiency	\$	1.0	\$	0.9	\$	0.9	\$	0.9	\$	0.9	\$	0.3	\$	0.3	\$	0.3	\$	0.3	\$	0.3
Online Store	\$	0.5	\$	0.6	\$	0.7	\$	0.0	\$	0.1	\$	0.1	\$	0.1	\$	0.1	\$	0.1	\$	0.1
Water Heating	\$	0.4	\$	0.5	\$	0.7	\$	0.8	\$	0.9	\$	0.9	\$	0.9	\$	0.9	\$	1.0	\$	1.0
Multifamily	\$	0.8	\$	1.0	\$	1.0	\$	1.0	\$	1.0	\$	0.8	\$	0.8	\$	0.8	\$	0.9	\$	0.9
Residential Total	\$	9.4	\$	10.4	\$	11.0	\$	10.6	\$	10.8	\$	8.9	\$	9.0	\$	9.1	\$	9.2	\$	9.2

Commercial Sector Results

Energy Savings

In the current scenario, EnergyWise for Your Business is the largest commercial savings opportunity (Figure 17). It is a program targeting large commercial customers and consists of a wide variety of measures – both prescriptive and custom. In the expanded case, agricultural energy efficiency measures were added to address that customer segment in South Carolina.



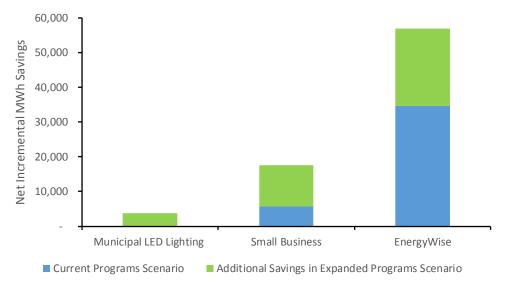


Figure 17. Net Commercial Incremental MWh Savings in 2024, by Program

Small Business is one of the largest areas for commercial sector savings growth in the expanded scenario (Figure 18). The Small Business has a large sector to target, with roughly 34,000 small commercial accounts as compared with only 19,000 large commercial accounts. However, both the small and large commercial programs are heavily dependent upon lighting measures.

The Small Business program drives an increase in savings for the commercial sector.

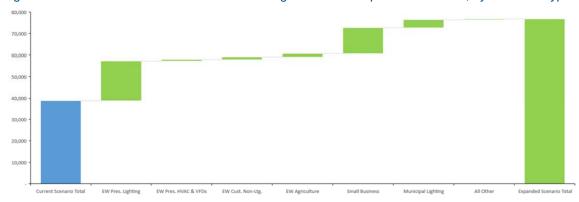


Figure 18. Additional Net Incremental MWh Savings in 2024 in Expanded Scenario, by Measure Type

The new Municipal LED Lighting program would service about half the cities in DESC's service area over five years, but further increases the reliance of lighting measures to achieve portfolio energy savings.



Program Cost-Effectiveness

The commercial portfolio of programs is cost-effective in both scenarios, as shown by the TRC test in Table 25 and Table 26. The commercial programs perform more consistently than the residential programs, with all programs having a cost-effectiveness ratio above 1.0. This means that no single program must ensure the performance of the sectors' portfolio of programs.

The commercial programs all perform well individually and as a whole.

Table 25. Current Scenario Commercial Portfolio Cost-Effectiveness Results

Benefit-Cost Ratios	TRC	PAC	RIM	PCT
EnergyWise	1.8	2.7	0.5	2.9
Small Business	1.9	1.9	0.4	6.3
Commercial Total	1.8	2.6	0.4	3.1

Table 26. Expanded Scenario Commercial Portfolio Cost-Effectiveness Results

Benefit-Cost Ratios	TRC	PAC	RIM	PCT
EnergyWise	1.8	2.2	0.4	3.0
Small Business	1.9	1.8	0.4	6.6
Municipal LED Lighting	2.4	0.4	0.2	5.0
Commercial Total	1.9	1.9	0.4	3.3

Levelized Cost of Energy Savings

In the current scenario, the levelized cost of the Small Business program is higher than the EnergyWise program (Table 27); however, as shown in Figure 17, the commercial portfolio savings are predominantly from the EnergyWise program. This helps keep the overall commercial portfolio levelized cost low.

Table 27. Current Scenario Commercial Annual and Levelized Cost of Energy Saved, by Program

Cost of Energy Savings (\$/kWh)		Levelized \$/kWh			
EnergyWise	\$ 0.18	\$	0.020		
Small Business	\$ 0.17	\$	0.029		
Commercial Total	\$ 0.18	\$	0.021		

In the expanded scenario, the larger increase in the Small Business program, as well as the high levelized cost of the new Municipal LED Lighting program, result in a large increase in the overall commercial portfolio levelized cost of energy (Table 28).

The expanded scenario sees a rise in the cost of energy savings for commercial

Table 28. Expanded Scenario Commercial Annual and Levelized Cost of Energy Saved, by Program

Cost of Energy Savings (\$/kWh)		Levelized \$/kWh			
EnergyWise	\$ 0.21	\$	0.024		
Small Business	\$ 0.18	\$	0.031		
Municipal LED Lighting	\$ 1.05	\$	0.086		
Commercial Total	\$ 0.23	\$	0.028		



In Table 29 and

Table 30, the annual program costs for each commercial program are displayed in millions of dollars.

Table 29. Current Scenario Total Annual Commercial Program Costs

Program Costs (\$M)	2	020	2	021	2	022	2	023	2	024	2	025	2	026	2	027	2	028	2	029
EnergyWise	\$	5.1	\$	5.6	\$	6.0	\$	6.1	\$	6.1	\$	6.2	\$	6.2	\$	6.2	\$	6.2	\$	6.3
Small Business	\$	0.8	\$	0.9	\$	0.9	\$	1.0	\$	1.0	\$	1.0	\$	1.0	\$	1.0	\$	1.0	\$	1.0
Commercial Total	\$	5.9	\$	6.5	\$	6.9	\$	7.0	\$	7.1	\$	7.1	\$	7.2	\$	7.2	\$	7.2	\$	7.3

Table 30. Expanded Scenario Total Annual Commercial Program Costs


Program Costs (\$M)	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
EnergyWise	\$ 7.7	\$ 9.4	\$ 11.8	\$ 11.7	\$ 12.1	\$ 12.5	\$ 12.8	\$ 13.2	\$ 13.6	\$ 14.0
Small Business	\$ 1.6	\$ 2.4	\$ 2.9	\$ 3.0	\$ 3.1	\$ 3.1	\$ 3.1	\$ 3.1	\$ 3.1	\$ 3.1
Municipal LED Lighting	\$ 3.2	\$ 4.5	\$ 4.1	\$ 4.4	\$ 3.9	\$ -	\$ -	\$ -	\$ -	\$ -
Commercial Total	\$ 12.5	\$ 16.3	\$ 18.7	\$ 19.2	\$ 19.1	\$ 15.6	\$ 15.9	\$ 16.3	\$ 16.7	\$ 17.1

Industrial Sector Results

Energy Savings

As shown earlier, in Figure 5, industrial customers have heavily opted out of the energy efficiency programs in South Carolina. Based on this significantly reduced participation rate, savings from large industrial customers decline steadily in the current scenario (Figure 19). This occurs because the small population of participants becomes saturated and begins to reach a mature state.


Figure 19. Net Industrial Incremental MWh Savings in 2024, by Program

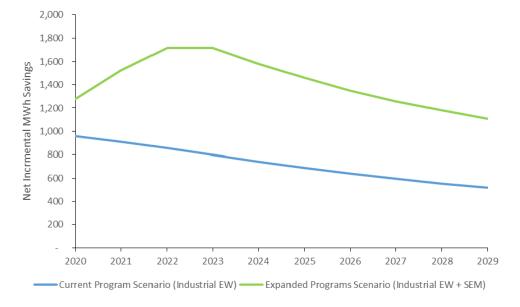



To counter this mature program decline, a new Strategic Energy Management (SEM) program offering was added to the expanded case (Figure 20). This offering would assist small to medium enterprises in enhancing operational efficiency. Many such enterprises do not have the knowledge, time, or resources to make those improvements, so the program is designed to provide technical training, as well as incentives for those optimizations and other low-cost measures.



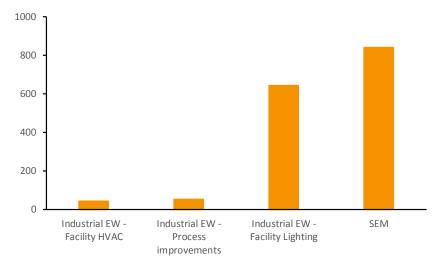

Program Cost-Effective

The industrial portfolio of programs is cost-effective in both scenarios, as shown by the TRC test in Table 31. The industrial programs perform especially well in the Participant Cost Test (PCT), which indicates that the measures should be a good return on investment for the customers participating in the program. This is particularly valuable for a sector with such a high rate of opting-out.

The cost-effectiveness is high from the participants' perspective in the industrial programs.

Table 31. Industrial Portfolio Cost-Effectiveness Results

Benefit-Cost Ratios	TRC	PAC	RIM	PCT
Industrial Efficiency	1.7	1.8	0.5	6.5
Strategic Energy Management	1.1	1.5	0.5	5.7
Industrial Total	1.4	1.7	0.5	6.2

Levelized Cost of Energy Savings

Each individual industrial program, as well as the entire portfolio, have a levelized cost of energy savings below the avoided cost of energy (

Table 32). This indicates that despite the small size of the industrial portfolio savings, it is a very strong offering.

The levelized cost of energy savings remains low for the industrial portfolio.

The new Strategic Energy Management program offering helps address the large number of opt-outs.



Table 32. Industrial Annual and Levelized Cost of Energy Saved, by Program

Cost of Energy Savings (\$/kWh)		Levelized \$/kWh			
Industrial Efficiency	\$ 0.24	\$	0.024		
Strategic Energy Management	\$ 0.22	\$	0.031		
Industrial Total	\$ 0.23	\$	0.027		

In Table 33, the annual program costs for each industrial program are displayed in millions of dollars.


Table 33. Total Annual Industrial Program Costs (in millions of dollars)

Program Costs (\$M)	2	020	2	021	2	022	2	023	2	024	2	025	2	026	2	027	2	028	2	029
Industrial Efficiency	\$	0.2	\$	0.2	\$	0.2	\$	0.2	\$	0.2	\$	0.2	\$	0.2	\$	0.1	\$	0.1	\$	0.1
Strategic Energy Management	\$	0.1	\$	0.1	\$	0.2	\$	0.2	\$	0.2	\$	0.2	\$	0.1	\$	0.1	\$	0.1	\$	0.1
Industrial Total	\$	0.3	\$	0.3	\$	0.4	\$	0.4	\$	0.4	\$	0.3	\$	0.3	\$	0.3	\$	0.3	\$	0.3

Portfolio Benchmarking

Energy efficiency program savings levels across the United States have generally declined as minimum energy performance standards for general service light bulbs (EISA 2007) were implemented by the U.S. Department of Energy. In the U.S. South Census region, median total electric savings as a percentage of sales was 0.4% in 2017 (Figure 21). The forecast for this study, in comparison, ramps up to 0.7% of sales by 2022 in the expanded case. This is 75% higher than the 2017 median shown below.

Figure 21. Histogram of Total Savings Impacts in the South Census Region for 2017 (n=42)

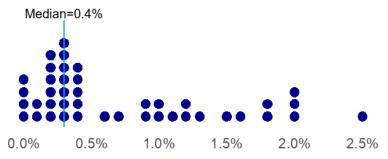

Source: U.S. Energy Information Administration

The median total energy efficiency portfolio cost per kWh saved¹⁷ in the South Census region was \$0.22 in 2017 (Figure 22). In comparison, the cost per kWh in the current programs scenario in this study is \$0.20 per kWh, and \$0.26 in the expanded scenario¹⁸ – savings double in the expanded scenario with a 30% increase in cost per kWh saved.

¹⁸ Calculated as the sum of program costs divided by the sum of incremental savings for 2020–2029.



38

¹⁶ Each dot on the chart represents the total energy efficiency portfolio savings as a percentage of sales for one investor-owned utility in the South Census region in 2017. Note that some states only report gross energy savings, and Evaluation, Measurement, and Verification (EM&V) methods vary by state; therefore, performance across states is not 100% comparable.

¹⁷ Calculated as the total program costs divided by incremental (annual) savings for 2017.

Median=\$0.22

25

20

\$5.0 \$0.1 \$0.2 \$0.3 \$0.4 \$0.5 \$0.6 \$0.7 \$0.8 \$0.9 \$1.0


Figure 22. Histogram of Total Energy Efficiency Portfolio, in \$/kWh, in the South Census Region for 2017 (n=40)

Source: U.S. Energy Information Administration

The results of this study are reasonable compared to the results of several other potential studies covering areas of the United States primarily in the South. ICF identified a reference class of eight potential studies conducted by analysts other than ICF. The average annual savings as a percentage of sales forecasted in each reference class study's "high" case is shown in solid blue, below. The horizontal axis in Figure 23 is average annual savings as a percentage of sales over the forecast period. The vertical access shows the studies (study author, study area, study time horizon). The annual average savings level forecasted across the ten-year study period in the Expanded case (0.6%) is shown in candy-stripe blue. The median value of the reference class of eight studies is 0.9%. Importantly, the reference class studies all include earlier time periods less impacted by federal minimum energy performance standards for general light bulbs (EISA 2007); therefore, the results of the reference class studies likely include much more savings from standard screw-in LEDs and CFLs than this study. Further, some of the studies, including those performed by ACEEE, were conducted using top-down methods, making the results less comparable to this study, which was developed using a bottom-up approach.

Figure 23. Results from eight comparable potential studies in the U.S. Southern region, and from this study

AEG. Georgia Power. 2012-2023

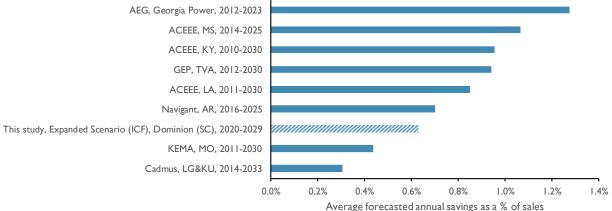

Sources: ACEEE; Navigant



6. DEMAND RESPONSE POTENTIAL STUDY EXECUTIVE SUMMARY

This report on demand response potential complements the section on energy efficiency potential analysis, both of which were performed as part of the DSM study.

As with the energy efficiency potential study, a bottom-up process was used to determine achievable potential forecasts for the 2020–2029 period for multiple demand response programs covering the residential, commercial, and industrial sectors under current and expanded scenarios. The current scenario case comprised existing programs, while the expanded case explored new programs that could potentially be implemented in the DESC service territory. The focus of the modeled scenarios was to reduce the winter peaking demand and thus all results discussed are for the winter peaking season. The key results are:

- ▶ Demand response (DR) programs reduce the winter peak load in 2029 by 3.86% in the expanded scenario, where the new program contribution is 0.85%.
- **Demand growth is offset by 60% in 2029** in the expanded case due to the DR programs.
- ▶ The interruptible load program for industrial customers remains the dominant program, as in the current scenario.
- ➤ The Direct Load Control (DLC) program contributes to an additional 28% of winter demand savings in 2029 in the expanded scenario, which spans the residential and commercial sectors.
- ➤ The DR programs recommneded to DESC show a Total Resource Cost (TRC) test benefit-to-cost ratios of 1.8 or above for all programs in both scenarios, with a total portfolio TRC ratio of 2.0.

It should be noted that the results presented in Achievable Demand Response Potential section, do not consider any Advanced Metering Infrastructure (AMI) deployment beyond what is currently installed, as DESC did not have an AMI installation deployment plan at the time the analysis was conducted. Following the merger with Dominion Energy, additional discussions began regarding further AMI deployment. No AMI rollout plans have not been finalized. An additional scenario with an ICF anticipated deployment plan for AMI was developed and included in Appendix A to show the DR programs' potential in the event a deployment plan is implemented.



7. STUDY APPROACH

Overview

A bottom-up approach was used to evaluate DR potential for DESC. Two scenarios were analyzed for the study: (1) **current programs scenario** and (2) **expanded programs scenario**. While the current scenario was modeled based on existing programs and informed mainly by past program performance, the expanded scenario underwent a full potential modeling process. The list of programs and differences for the expanded programs from the current programs scenario are listed in Table 34.

Table 34. Scenarios Modeled


Current Programs Scenario	Expanded Programs Scenario	Differences in Expanded Scenario	Applicable Sectors
Interruptible Load	Interruptible Load	None	Industrial
Standby Generation	Standby Generation	None	Commercial
	Time-of-Use Program	Modified rates	All Sectors –
	_	(incremental impact	Residential,
		over existing program)	Commercial, Industrial
	Direct Load Control	New Program	Residential,
	Smart Thermostat		Small and Medium
	Water Heater Switch		Commercial
	Critical Peak Pricing	New Program	Residential,
	·		Commercial

The analysis began with the development of a comprehensive list of DR program types currently implemented in U.S. markets. The data required to model and evaluate the parameters for different programs were then collected, such as implementation costs, market size, and participation criteria. Data sources include DESC data; publicly available data, such as potential studies and annual reports; and ICF expert input. This information was then run through the ICF Demand Response models to evaluate savings and cost-effectiveness.



Figure 24 shows the bottom-up approach for this study.

Figure 24. Overview of Bottom-up Approach to Potential Study

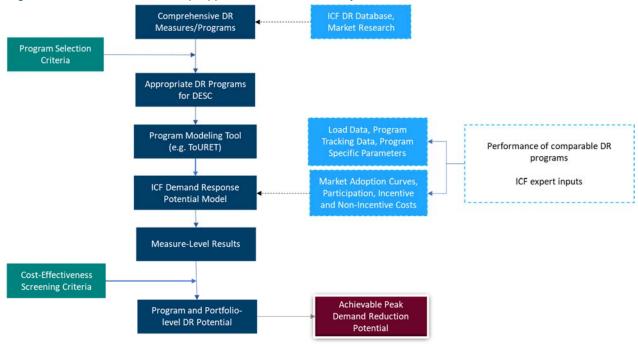

This study provides the potential DESC winter peak impact due to existing and expanded DR programs, along with the details of savings forecasted for every year of the analysis, annual program costs, and program benefit-cost results.

Data Review

Utility System Data

Utility system data were provided by DESC, and the list of data items is provided here:

- ▶ Forecasted hourly load for 2019–2021, by customer class
- ▶ Forecasted annual system energy and demand forecasts, by customer class and season
- Forecasted electricity avoided capacity and energy costs for 2019–2038
- Forecasted customer counts, by sector
- AMI meter saturation data
- Utility discount rate
- Reserve margin and transmission and distribution losses as a percentage
- Retail rates of electricity, by sector

Measure and Program Data

Based on the data provided, territory-specific inputs were developed for the selected programs. Existing program data were obtained from DESC Evaluation, Measurement, and Verification (EM&V) reports, tariff documents, and event dispatch details. For example, Interruptible load and standby generation programs data were obtained as follows:



- Event durations from the previous dispatch details
- Incentive levels from rate documents or paid incentives details
- Program historic MW levels

New and modified program data and modeling are discussed in more detail in the following subsections.

Time of Use (ToU) Modified

The Time-of-Use program was modified from the current price to examine whether a different (more aggressive, but conforming to industry standards) price would result in any savings beyond what the current program achieves. The ToU prices were modelled using load and cost duration curve analysis to arrive at the peak to off-peak ratios that align with programs across the country, and were then designed to be revenue neutral with current program implementation.

The data collection and modeling process involved:

- Obtaining the participation levels for ToU programs across sectors to calibrate the participation curve for the potential. Participation was constant across the historic period, which was determined to be the case going forward.
- ▶ Determining the fraction of the population eligible for the program. As with most rate-based programs, this is bound above by the number of AMI meters installed per customer sector.
- Researching ToU programs implemented by other program administrators to validate the peak to off-peak pricing ratio obtained using the load/cost duration curve analysis.
- Since there are no events in the ToU program, the impact estimation is done using elasticities. Elasticity data for various programs across the United States were researched and customized to DESC territory using expert opinion at ICF.

Direct Load Control (DLC)

DLC programs involve DESC remotely operating the switches for devices in consumer homes and businesses to shave loads during peak events. For a smart thermostat program, the utility is assumed to control the set points of customers' thermostats within an allowed range during the event. This program applies to the residential and commercial customer classes. The program was modeled based on the measures listed in Table 35.

Table 35. DLC Measures Considered

Class/Sector	DLC Measure
Residential	Water Heater Switch
Residential	Smart Thermostat
Commercial	Water Heater Switch
Commercial	Smart Thermostat

The data collection process for DLC programs included the following:

- Developing the S-curve for participation, with maximum participation reached by 2039 (20 years), and using the data from the curve through 2029 (10 years). This is based on the Bass diffusion curve, coupled with maximum participation levels from existing programs and potential studies, and refined using ICF expertise.
- Determining the fraction of the population eligible for the program. This defines the market size for a measure and is determined by the saturation of enabling technologies. The market saturation was obtained from ODC.



- Researching DLC programs implemented by other program administrators.
- ▶ Estimating the number of DLC events each year. For this study, the DLC events were determined by the top 10 4-hour block events per season each forecast year.

Critical Peak Pricing (CPP)

Winter CPP programs for residential and commercial sectors are rate-based programs that have a higher price for energy during specified events. The consumers are offered a discount on regular usage (i.e., there are lower energy prices during any non-event times) for participation in this program to compensate for the high price during the events, with the expected revenue (bill for a consumer) the same with regular rates and with CPP pricing.

The CPP program was modeled using data from various programs across the United States. The data collection and modeling process involved:

- Developing the S-curve for participation, with maximum participation reached by year 2039 (20 years), and using the data from the curve through 2029 (10 years). This is based on the Bass diffusion curve, coupled with maximum participation levels from existing programs and potential studies, and refined using ICF expertise.
- ▶ Determining the fraction of the population eligible for the program. As with most rate-based programs, this is bound above by the number of AMI meters installed per customer sector.
- Researching CPP programs implemented by other program administrators to obtain the critical peak to off-peak pricing ratio.
- ▶ Estimating the number of CPP events during each year. For this study, the CPP events were determined by the top 10 3-hour or 4-hour block events per season each forecast year.

Program Modeling

Program Types Modeled

The process began by assessing the two primary DR program types – dispatchable and rate-based programs – as shown in Table 36.

Table 36. Sample List of DR Programs From Which Applicable Program List Is Filtered

Dispatchable / Load Response	Rate-Based / Price Response
Direct Load Control	Time-of-Use Pricing
Interruptible Load	Critical Peak Pricing
Standby Generation	

Dispatchable programs are programs in which the utility offers customers payments for reducing demand during specified periods. These can include either the reduction of usage by a customer when an event is called, or the control of switches by the utility directly. Note that such programs require the analysis of multiple measures, the details of which are described below.

Rate-based programs are programs in which customers voluntarily reduce their demand in response to energy price signals or pre-informed pricing structures in which they enroll ("opt-in" programs).

The following criteria were used to choose the programs most applicable to the DESC service area:

- DESC hourly load profile
- Availability of required technologies for program deployment
- Availability of data from programs across the United States



- Discussion with DESC
- Expert opinion of ICF

One modified and two new programs were selected to model for this analysis, along with the existing levels of interruptible load and standby generation programs. These other programs included the DLC program with two measures – smart thermostats and water heater switches, for both residential and commercial load; the CPP program for residential and commercial; and a modified ToU program for all sectors. While real-time pricing existed for some customers, it has since been suspended indefinitely and hence was assumed to be discontinued in this analysis as per discussions with DESC.¹⁹

Both the current standby generator and interruptible programs were reviewed but not modeled under the expanded scenarios. Factors that supported this decision included the large percentage of industrial customers that would most likely participate in the offerings have already made the decision to opt-out of the current DSM programs. For the standby generator program, EPA changes (NESHAP RICE²⁰) which limit non-compliant units from running more than 500 hours/year, has restricted and limited participation. Throughout the course of ICF's analysis, the capacity provided by the standby generator program was assumed to remain constant at 25 MW from wholesale and 10MW from retail based on historical data.

An offering with a focus on winter peak reduction was modelled under the assumption of 150 MW maximum interruptible load based on historic data. Winter curtailments present greater challenges to manufacturing and other industrial customers since one important consideration includes needing to heat facilities and buildings during the coldest times of the year. ICF's review of recent potential studies conducted for IRP support show that typical winter DR programs offering interruptible/ curtailment programs range from 0.4%-2.7% of peak, less than the 3.2% that DESC currently offers.

Of the selected new programs, DLC for commercial (both smart thermostat and water heater switches) and DLC for residential (only smart thermostat) passed the TRC test. Since a ToU program for all sectors (residential and commercial and industrial [C&I]) already existed, considering that there would not be any initial costs, a modified-rate ToU program was defaulted to being cost-effective. The CPP program did not pass the TRC test, primarily because there were very few customers with AMI installed, resulting in the benefits not being enough to cover the initial costs of setting up the program. The DLC water heater program for residential also did not pass the TRC test, mainly due to the recruitment costs, which included a switch purchase, and installation and labor costs. The smart thermostat passed the TRC test for both sectors (residential and commercial) since it was modeled as a Bring Your Own Thermostat program and thus did not include the cost of equipment and additional expenses. Note that the measures for DLC in the commercial sector mainly included the small and medium commercial customers.

With the shorter planning timescale, 5-years, no new programs were cost effective and thus none were developed for the program plan.

²⁰ National Emission Standard for Hazardous Air Pollutants for Reciprocating Internal Combustion Engines



¹⁹ SCPSC Docket No. 1999-30-E, https://dms.psc.sc.gov/Attachments/Matter/4cccf7cf-d14e-4ede-8d2d-34aa21dc353a

Program Assumptions

Program Costs

Program costs were estimated to reflect average annual costs based on the following:

- Actual program costs of different programs being implemented in the United States
- Costs published in DR potential studies
- ▶ ICF program evaluation and implementation experience

DR program costs that were considered for the programs include the following standard components:

- Initial Costs
 - New participant incentives Program payments that DESC would make to the customers to opt-in to the DR programs. Incentive costs were estimated for each measure.
 - Recruitment costs Costs per participant, paid to set up a customer as a program
 participant, marketing, and switch costs (such as water heater switches) and installation, if
 any.

The new participant incentive costs are assumed to be zero for all programs modeled in this study. It was assumed that the customers – residential and commercial – who have the smart thermostats are the ones eligible for the corresponding DLC program. For the water heater non-residential customers, the installation and switch costs are included in the initial recruitment costs.

Annual Costs

- Ongoing incentives The amount, per kilowatt, paid for ongoing participation in the program, typically via direct payment/bill discount.
- Program administrative costs Costs of the program, in dollar per kilowatt, that are paid for ongoing participation in the program, which vary depending on that participation, and include customer service, maintenance, replacement of switches on burn-out, and so forth.
- ▶ Fixed Costs Costs, in dollars, paid for the program for system coordination and so forth. These are independent of the number of customers enrolled in the program.

Participation

The participation schedule for each program was forecasted according to:

- Base rate, or the participation level in Year 1 of the program
- Maximum participation rate
- Ramp-up rate, which determines how quickly the participation grows from the base rate to the maximum rate

A key assumption was that all programs were modeled as opt-in DR products. Therefore, the programs are first implemented with low participation numbers that gradually ramp up to maximum participation levels. For this study, which spans 10 years of analysis, the first 10 years of the participation curve are taken into account when modeling the potential. A customer must enroll in order to participate in the pilot or the program, and the cost development included this assumption. Opt-in programs are typically characterized by lower maximum rates of adoption and generally lower participation levels than opt-out programs; however, the per participant impact of these types of programs is higher than those of opt-outs.



Program Evaluation

ICF's Demand Response Potential Model (DRPM) was used to forecast savings, evaluate the program costs, and generate program post-impact loadshapes. While the DRPM aggregates the results from various programs to output portfolio-level information and provides an avenue to perform cost-effectiveness calculations, individual program models calculate the savings impact that serves as the input for DRPM. The various assessment models used in this study are described below.

Time-of-Use Rate Evaluation Tool (ToURET)

ICF's ToURET uses time-varying tariff data (e.g., time of use) to model the demand/consumption shifts that reflect consumer behavior. It inputs price elasticity values to quantify the response of the consumer to dynamic pricing. The output is an annual DR load profile for use in resource planning, along with various DR output metrics, such as peak demand reduction, utility revenue change, and annual consumption impact.

While it was designed for time-of-use programs, ToURET also allows impact evaluation of various other rate-based programs, such as CPP. ToURET also facilitates the evaluation of impacts over multiple pricing and elasticity scenarios. The elasticities were calculated as the national average of time-of-use programs researched for this study, with modifications, as necessary, to suit to DESC service area.

Direct Load Control Model

The DLC model uses historic and potential program information to quantify the impact of measures during DR events. The per customer peak impacts are used in the model to account for the rebound or snap-back that occurs during the hours immediately following a DR event.

As with the ToURET model, the DLC model also can evaluate the impacts of dispatchable programs, such as interruptible load and standby generation.

Measure and Program Screening for Cost-Effectiveness

Measure screening was performed on DLC measures using the TRC test. Measure TRC benefits include avoided costs due to the measure over the measure lifetime. For DLC, the measure life in utility programs is typically considered one year. Measure TRC costs include participant costs and program implementation costs, and exclude the program-level fixed costs for initial setup of the program. Three of the four DLC measures passed the measure TRC test. These measures are shown in Table 37. Water heater switches for residential programs did not pass the TRC test, mainly because of the initial recruitment costs, which are not outweighed by the corresponding avoided costs benefits.

Table 37. DLC Measures with a TRC Benefit/Cost Test Ratio of 1.0 or Higher

Class / Sector	DLC Measure
Residential	Smart Thermostat
Commercial	Water Heater Switch
Commercial	Smart Thermostat

Standby generation and interruptible load programs are already being implemented and comfortably pass the TRC test. The rate-based programs do not have individual measures that require screening. Hence, the screening was performed at a program level at this point. CPP programs do not pass the screening test, while ToU program is *assumed* to be cost-effective since the program is already operational. The main reason CPP does not pass the screening test is that the number of AMIs installed in the territory is low, leading to low participation, especially in the near term (the lower end of the S-curve).






8. ACHIEVABLE DEMAND RESPONSE POTENTIAL


All results discussed in this section are winter demand savings from the expanded programs scenario.

Figure 25. Load Growth and Load Impact, by DR Program

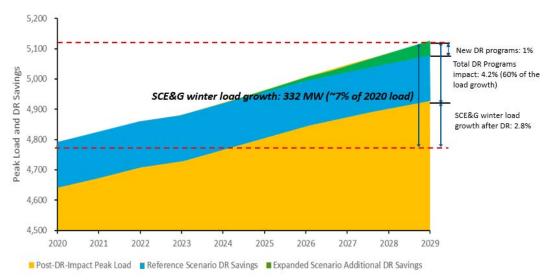

DR programs offset as much as 60% of the demand growth between 2020 and 2029 in the expanded scenario, as shown in Figure 25. In other words, the winter peak is expected to increase by 7% in the absence of DR programs (but includes the effect of the ToU program that is rolled out as a tariff option). Due to peak load reduction by the DR programs, this growth would be limited to 2.8%. A large amount of the load growth was already being offset by the interruptible load and standby generation programs (46%); however, the new DLC program contributes significantly to the total reduction achieved in the expanded case (14%).

Figure 26. Winter DR Savings Forecast

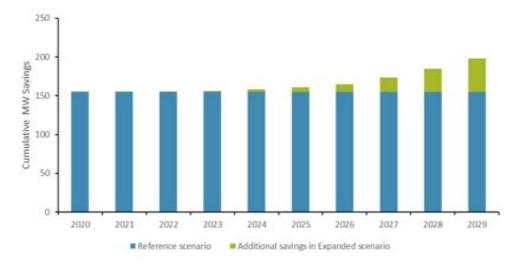


In absolute terms, by winter 2029, an additional 43 MW can be achieved via new programs, with the majority being recognized from DLC (including smart thermostat) programs for the residential and commercial sectors, as shown in Figure 26. While much of the savings are from the interruptible load program, the DLC program also provides a significant amount by 2029. The DLC program



contribution comes from the commercial measures of smart thermostats and water heater switches, as well as the residential smart thermostat measure. The modified ToU rate does not contribute much due to the low number of AMI meters installed and the limited incremental impact of altering the prices. ToU participation has been flat over the years, and is expected to continue that way.


Figure 27. DESC Winter Peak Load Share by Sector



DESC winter peak is dominated by the residential sector (55% in 2029), followed by C&I, as shown in Figure 27. This indicates that there may be untapped potential in these sectors, and the current DR program approach is considering programs for these sectors.

Figure 28 shows how the DR program split changes in the form of sector-level contribution. The existing programs are interruptible load in industrial and standby generation in commercial. The new DLC program adds to the commercial component in the form of smart thermostat and water heater switch measures, and to the residential sector in the form of smart thermostat programs. The industrial sector has higher savings than the commercial sector as a whole, mainly due to the interruptible load program, which is characterized by high savings compared to other C&I programs.

Figure 28. System Load and Load Savings Distribution by Sector From 2020 to 2029

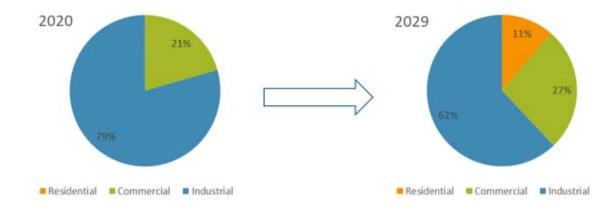

Program implementation costs for the new programs mainly follow the participation curve as the recruitment costs and the incentives are aligned with the number of participants. Consequently, it starts out slowly and grows rapidly from 2024 to 2029. Costs, if projected for another 10 years, would level-off over that time. Note that post-merger with Dominion Energy, the AMI installation schedule was revised, which would significantly impact the rate-based programs' participation levels. These are discussed in Appendix A.

The cost progression over the program period is shown in Table 38.



Table 38. Winter Program Annual Costs for New Programs (\$M)

Program - Sector	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Direct Load Control - Residential	\$ 0.22	\$ 0.13	\$ 0.15	\$ 0.17	\$ 0.22	\$ 0.31	\$ 0.47	\$ 0.71	\$ 1.02	\$ 1.34
Direct Load Control - Commercial	\$ 0.31	\$ 0.14	\$ 0.15	\$ 0.19	\$ 0.24	\$ 0.35	\$ 0.51	\$ 0.83	\$ 1.23	\$ 1.67

Table 39 shows the levelized costs of the programs (in dollars per kilowatt) and the benefit-cost test results. The programs are all cost-effective under the TRC test, and overall, the portfolio of programs is highly cost-effective, with a TRC test result of 2.0 in the expanded scenario. The levelized costs for all programs are reasonable and comparable to the other market projections available.

Table 39. Levelized Costs and Benefit-Cost Test Results of the DR Portfolio

Brogram	Sector	Cos	Lev	Levelized Costs		
Program	Sector	TRC Test	PAC Test	RIM Test		(\$/kW)
Interruptible Load	Industrial	1.8	1.4	1.1	\$	63.50
Standby Generator	Commercial	3.6	2.8	2.4	\$	31.75
Direct Load Control	Residential	1.8	1.0	1.0	\$	85.15
Direct Load Control	Commercial	2.0	0.8	0.8	\$	107.76
	Residential	1.8	1.0	1.0	\$	85.15
Total Sector-Level	Commercial	3.2	2.1	1.9	\$	41.38
	Industrial	1.8	1.4	1.1	\$	63.50
Total Portfolio	All	2.0	1.5	1.2	\$	59.27



9. FIVE-YEAR PROGRAM PLAN EXECUTIVE SUMMARY

This Comprehensive Report and Demand Side Management Portfolio Plan documents the development of the DESC-proposed PY10 through PY14 Demand Side Management (DSM) portfolio. This report includes:

- Program descriptions and rebate tables (where applicable)
- Summaries of major program design changes
- Estimated program participation by year
- Energy and demand savings estimates at the measure level
- Estimated energy and demand savings by program, by year
- Comparison to DESC's Potential Study
- Budgets by major category
- Program cost-effectiveness
- Program evaluation plans

The process of developing the programs in the portfolio included the following steps:

- 1. Establishment of the demand and energy impacts of a broad range of DSM measures.²¹
- 2. Screening of individual measures for cost-effectiveness.
- 3. Bundling of the measures that pass cost-effectiveness testing into "programs."
- 4. **Forecasting of participation** in each program, including estimation of the number of customers who would adopt each efficiency measure.
- 5. **Costing of each program**, including estimation of customer incentives, administration, marketing, EM&V, and other necessary costs.
- 6. Screening of program cost-effectiveness based on the bundled measures and program costs.

To create the program plan, DESC relied on the recently completed 10-year Potential Study. As described in the Potential Study discussion, the development of the forecasts included consideration of market changes since DESC originally introduced its DSM programs; DESC's implementation experience with the existing programs, including EM&V results; successful programs delivered by other utilities; and feedback from DESC customers and other stakeholders. Each of those individual steps is discussed in detail in the Potential Study.

Recommended programs, as listed in Table 40, include existing programs with enhancements in program design and new programs designed to meet important evolving market opportunities.

²¹ As used in this report, a "measure" is a single instance of a particular energy-efficient technology or activity, such as a single type of efficient lighting. A "program" is a bundle of efficient measures that are delivered within a single programmatic framework and may, for example, include many lighting technologies all delivered under one umbrella.



Table 40. Summary of Programs Recommended for Implementation

		Sum of Incremental for Program Years 10–14							
Program	TRC	Non-Incentive \$	Incentive \$	Total \$	MWh	MW			
Appliance Recycling	1.11	\$2,547,062	\$2,425,774	\$4,972,836	14,149	1.7			
H&C and Water Heating	1.02	\$3,386,440	\$11,702,348	\$15,088,788	27,271	13.5			
Home Energy Check-up	1.00	\$6,808,468	\$9,015,591	\$15,824,059	27,406	6.1			
Home Energy Reports	1.88	\$895,740	\$3,847,221	\$4,742,962	24,473	9.3			
Neighborhood Energy	5.90	\$969,974	\$3,730,671	\$4,700,645	24,439	2.8			
Efficiency									
Online Store	8.15	\$345,799	\$1,533,467	\$1,879,266	19,799	1.7			
Multifamily	1.76	\$1,527,150	\$3,442,875	\$4,970,025	18,627	2.9			
Residential Portfolio	1.84	\$16,480,633	\$35,697,946	\$52,178,580	156,164	37.8			
EnergyWise for Your	1.84	\$18,672,720	\$35,828,135	\$54,500,855	252,196	57.1			
Business									
Small Business Direct	1.91	\$4,910,887	\$8,184,812	\$13,095,699					
Install					71,541	20.6			
Municipal LED Lighting	2.37	\$5,035,877	\$14,957,202	\$19,993,079	19,070	_			
C&I Portfolio	1.89	\$28,619,484	\$58,970,149	\$87,589,633	342,807	77.7			
Total Portfolio	1.88	\$45,100,117	\$94,668,095	\$139,768,212	498,971	115.5			

The cumulative total expenditure on the recommended programs is estimated to be \$139,768,212 during the PY10–PY14 period. Cumulative net energy and demand savings associated with these expenditures are 498,971 MWh and 115.50 MW, and the TRC benefit-cost ratio of the portfolio of programs is 1.88.

The primary drivers for the recommended changes in the programs include the following:

- Results from the Potential Study
- Recommendations from the program evaluations, process changes, and measure offerings
- Addition of programs specifically mentioned and/or requested in stakeholders' comments




10. OVERVIEW OF METHOOLOGY

While the forecasts for the PY10–PY14 program period rely on the 10-year Potential Study, below is discussion concerning the typical program development process. This mirrors what took place in the Potential Study and more details on the bottom-up approach can be found in the Potential Study report.

The program development process is illustrated in Figure 29.

Figure 29. Program Development Process

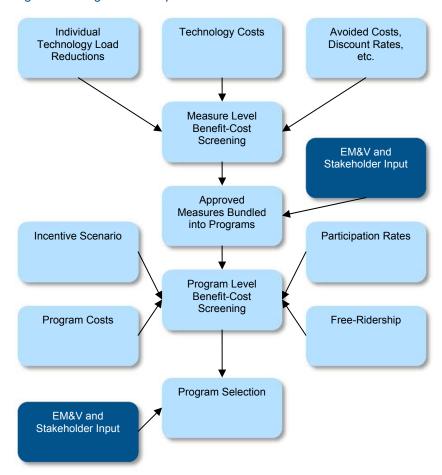

10.1 Development of DSM Measure Load Impacts

Measure impacts include the estimated peak demand and annual energy reductions associated with a single instance of the DSM measure being installed, along with the estimated incremental cost of the measure.²² Sources of data included evaluations and engineering reviews prepared by DESC's third-party EM&V contractor, Opinion Dynamics Corporation (ODC); data gathered during program implementation; and other sources.

²² The incremental cost of the measure is defined as the additional cost of the efficient measure over and above the cost of the baseline measure (i.e., the measure the customer would have installed in the absence of the program).



54

10.2 Screening of Individual Measures

Using the information gathered in Step 2.1, each individual measure was evaluated for cost-effectiveness using the TRC test, as defined by the California Standard Practice Manual and the National Standard Practice Manual. This step identifies any measures that are not cost-effective as a stand-alone measure (i.e., absent consideration of additional program costs or free-ridership). Usually, measures that are not cost-effective on their own are not considered for inclusion in a program, absent a compelling reason to do so.

In addition, non-energy benefits (NEBs) were included in the analysis and include water savings, gas savings, and deferred replacement savings for measures, where appropriate.

10.3 Bundling of Measures

Measures that passed the initial cost-effectiveness screening were bundled into groups representing "program types." A program type represents a group of measures that are likely to be delivered under a single "umbrella," typically using similar channels and incentive strategies, and which can share in the common costs associated with program implementation. The program types employed were drawn from a review of best practice program information developed by the American Council for an Energy Efficient Economy (ACEEE), the Consortium for Energy Efficiency (www.cee1.org), the California Public Utilities Commission's (CPUC) Best Practices website, and from review of programs operated by utilities and other program administrators across the country.

Measures that were cost-effective were bundled into at least one program. In certain cases, non-cost-effective measures were included in a program if it was believed that the measure should remain for reasons such as reducing the entry barrier for other measures or meeting the needs of hard-to-reach customers.



10.4 Forecasting of Participation

- Participation was forecasted on a measure-by-measure basis. Depending on the program design and whether the program targeted retrofit, replacement, or new opportunities, the participation forecasting may have considered the following:
- Historic participation in the program
- Participation in similar programs offered by other utilities
- The incentive strategy and level (percentage of incremental cost rebated) and resulting customer payback period
- Turnover in the stock of baseline equipment
- Level of new construction and/or major remodeling
- Changes in future codes and standards
- Trade ally feedback
- The level of marketing and promotion

The forecasted measures installed and/or estimated participation numbers (as appropriate) and associated budget by year is provided for each program in the Individual Program Descriptions section of this report.

10.5 Costing of Programs

Total program costs were estimated based on a combination of DESC's prior experience and the experience of other utilities implementing similar programs, adjusted as necessary to reflect the scale and other unique characteristics of DESC's programs. Program costs generally included the following:

- Administrative costs
- Implementation and delivery costs
- QA/QC costs
- Marketing costs
- IT costs
- Incentive processing costs
- Customer service costs
- EM&V costs
- Other program costs

The annual costs associated with each program are detailed in the Individual Program Descriptions section of this report.

10.6 Program Cost-Effectiveness Screening

Combining the results of the previous steps, each program was screened for cost-effectiveness using the TRC test. Table 41 highlights the differences between the "measure-specific" and "program" TRC test calculations.



	Measure	Program
Benefits		
Savings	Gross	Net (includes NTG)
Costs		
Incremental Costs	Gross	Net (includes NTG)
Incentive Costs	_	Net (includes 1 – NTG)
Non-Incentive Costs	-	Gross

Table 41. Measure and Program Cost-Effectiveness Screening Comparison

The two main differences between the measure and program screening are (a) the use of net savings ratios, and (b) the inclusion of program costs. Program cost-effectiveness is based on program net savings (savings that are attributable directly to a program after netting out free-ridership). Net savings are accounted for in the calculation by multiplying gross program savings by the net-to-gross (NTG) ratio. The NTG ratio is the ratio of the net savings for a program to the gross savings. The difference between net and gross savings is represented by the savings realized by customers who:

- 1. Would have implemented an efficiency measure even in the absence of a program (free-ridership), and
- 2. Adopted a measure that is promoted by a program after having been influenced by the program, but without taking the program incentive (free drivers or spillover).

Although both effects should be accounted for in the calculation of an NTG ratio, evaluations typically estimate only the free-rider effect, and thus, data are often not available for the spillover effect. Therefore, the effect of applying the NTG ratio is to reduce program savings and cost-effectiveness (since program costs are not reduced by the NTG ratio). The primary sources for the applied NTG ratios included the third-party EM&V contractor, ODC, other regionally evaluated similar programs, and the Energy Efficiency Policy Manual (Policy Manual), prepared by the Energy Division of the CPUC. As needed, other sources were used as appropriate. The NTG assumed for each program is documented in the Individual Program Descriptions section of this report.

Program cost-effectiveness testing also includes the program implementation costs. The methodology for developing these program costs was discussed in Step 2.5. Additional steps necessary to complete the program cost-effectiveness screening included the following:

- Calculating the value of measure benefits using the same approach, as described earlier under Screening of Individual Measures.
- Summing these benefits over all measures and installations included in a program.
- Reducing these gross benefits by the NTG ratio.
- Calculating the total incentive costs by summing over the number of measures and installations projected.
- Summing the total measure incremental costs over all measures and installations included in a program.
- Calculating the total non-incentive program costs, calculated as a percentage of total incentive costs as described above.



- ▶ Calculating the TRC, and other test benefit-cost ratios over the forecast period:
 - UCT Test = Utility Avoided Supply Costs divided by Utility Incentive and Program Costs
 - PCT Test = Participant Savings and Incentives divided by Participant Incremental Costs
 - RIM Test = Utility Avoided Supply Costs divided by Utility Revenue Loss

The program cost-effectiveness results are provided in Table 42 below, and are provided in more detail for each program in the Individual Program Descriptions section of this report.

Table 42. Program Cost-Effectiveness Summary

Program	TRC	UCT
Appliance Recycling	1.11	0.92
Heating & Cooling, Water Heating	1.02	1.46
Home Energy Check-up	1.00	0.83
Home Energy Reports	1.88	0.32
Neighborhood Energy Efficiency	5.90	2.12
EnergyWise Online Store	8.15	4.51
Multifamily	1.76	1.54
Residential Portfolio	1.84	1.16
EnergyWise for Your Business	1.84	2.16
Small Business Direct Install	1.91	1.82
Municipal LED Lighting	2.37	0.42
C&I Portfolio	1.89	1.87
Total Portfolio	1.88	1.64

10.7 Comparison of DSM Program Plan to the Potential Study

In general, the DSM Program Plan follows the development of the 10-year Potential Study. After completion of the Potential Study, the market actor workshops were held to ensure that program design would be supported and that participation for specific measures exists. Some measures were then excluded from the DSM Program Plan, such as residential and small commercial HVAC tuneups, based on input from market actors and trade allies.



11. INDIVIDUAL PROGRAM SUMMARIES

This section provides an overview of the modeling results and key assumptions for each recommended program. Included in each section are:

- An overview of the program design
- A summary of the program impacts and cost-effectiveness testing
- A discussion of program enhancements relative to the current program, if applicable
- ▶ The program incentives budget
- The annual program costs
- The assumed NTG ratio

DESC has estimated annual cost, demand savings, energy savings, measure count, and participant count. Factors such as the nature of participants (e.g., the number of measures per participant) and the mix of demand savings versus energy savings per participant may vary from the planning assumptions.



11.1 Residential Appliance Recycling

11.1.1 Program Design

The Residential Appliance Recycling program provides residential electric customers with incentives for allowing DESC to collect and recycle less efficient, but operable, secondary refrigerators, and/or stand-alone freezers, permanently removing the units from service. The program seeks to achieve savings by permanently removing less efficient appliances from service, and preventing older appliances from being transferred within DESC electric territory, where they would continue to operate inefficiently. In addition to energy savings and demand reductions generated, the program recycles all participating appliances in an environmentally safe manner. Qualified appliances are collected at no additional cost.

11.1.2 Rebate Table

The current incentive payment per measure is provided in Table 43. DESC anticipates updating the incentive payments as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation. In addition, DESC may rely on limited-time offers (LTOs) to boost participation when needed. These are short-term events that increase the rebate for taking action during a specific time period and have been shown to increase participation during the promotional period.

Table 43. Program Incentives Summary for Residential Appliance Recycling

Residential Appliance Recycling					
Measure Description Per Unit Incentive					
Refrigerator Recycling	\$50				
Freezer Recycling	\$50				

11.1.3 Impact and Cost-Effectiveness Summary

Over the next five years, the program is anticipated to have a TRC benefit-cost ratio of 1.11, reduce energy demand by 1.72 MW and energy consumption by 14,149 MWh, and cost \$4,972,836. Year-by-year impacts are summarized in Table 44. The assumed NTG ratio is 0.60.



Table 44. Program Impact Summary for Appliance Recycling

Appliance Recycling	Year 10	Year 11	Year 12	Year 13	Year 14	Total	
Net Annual MWh Savings	2,909	2,867	2,828	2,790	2,755	14,149	
Net Annual MW Savings	0.35	0.35	0.34	0.34	0.33	1.72	
Measures / units recycled	4,383	4,316	4,253	4,192	4,135	21,279	
Incentive Costs	\$499,643	\$492,049	\$484,811	\$477,917	\$471,353	\$2,425,774	
Non-Incentive Costs	\$524,625	\$516,652	\$509,052	\$501,812	\$494,921	\$2,547,062	
Total Program Costs	\$1,024,268	\$1,008,701	\$993,863	\$979,729	\$966,275	\$4,972,836	
TRC Ratio		1.11					
UCT Ratio	0.92						
Net-to-Gross Ratio	0.60						

11.1.4 Program Enhancements

The Appliance Recycling program has proven to be successful within DESC's service territory and DESC will continue to recruit as many participants as possible. Due to this success, the program will focus on increasing participation through increased marketing and promotional events.



11.2 Residential Heating & Cooling and Water Heating Program

11.2.1 Program Design

The current Residential Heating & Cooling program offer incentives to residential electric customers for the purchase of new ENERGY STAR® qualified HVAC equipment that replaces older inefficient equipment. Additionally, incentives to encourage customers to improve the efficiency of existing AC and heat pump systems through complete duct replacements, duct insulation and duct sealing are offered. The program's major goals are to assist customers with reducing electricity consumption without compromising comfort in the home. The rebates help to offset the upfront cost for purchases of energy-efficient HVAC equipment.

11.2.2 Rebate Table

The current incentive table is listed below.

System Type		Current Minimum Ratings			Current Rebate	
		SEER	EER	HSPF	Current Nevate	
	Split	15	12.5	-	\$300	
Air Conditioner	•	16	13	-	\$500	
All Conditioner	Packagod	15	12	-	\$300	
	Packaged	16	12.5	-	\$500	
	Split	15	12.5	8.5	\$300	
Heat Pump	Split	16	13	9	\$500	
	Packaged	15	12	8.2	\$300	
	rackageu	16	12.2	8.3	\$500	
Duct Improvement Type			Rebate			
Duct Sealing				\$150		
Duct Insulation					\$150	
Complete Duct Replacement				\$300		

The anticipated incentive payment per measure and new measures are provided in Table 45. DESC anticipates additional measures and updating the incentive payments as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation.

Table 45. Program Incentives Summary for Residential Heating & Cooling and Water Heating Program

Residential Heating & Cooling and Water Heating Program				
Measure Description	Per Unit			
High-Efficiency Heat Pump or Central A/C Tier 1 (SEER 15-15.99)	\$400			
High-Efficiency Heat Pump or Central A/C Tier 2 (SEER 16-16.99)	\$500			
High-Efficiency Heat Pump or Central A/C Tier 3 (SEER 17-17.99)	\$600			
Air Source Heat Pump replacing Electric Resistance Heat Tier 1 (SEER 15-15.99)	\$550			
Air Source Heat Pump replacing Electric Resistance Heat Tier 2 SEER 16-16.99)	\$650			
Air Source Heat Pump replacing Electric Resistance Heat Tier 3 (SEER 17-17.99)	\$750			
Air Source Heat Pump replacing Electric Resistance Heat Tier 4 (SEER >18)	\$875			



Duct Sealing	\$300
Heat Pump Water Heater (HPWH)	\$750

Additional ENERGY STAR eligibility requirements, similar to the current minimum ratings listed in Table 44 (current rebate table), may be applied to heating and cooling equipment during the implementation phase of the program.

11.2.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 1.02, reduce energy demand by 13.47 MW and energy consumption by 27,271 MWh, and cost \$15,088,788. Year-by-year impacts are summarized in

Table 46. The assumed NTG ratio is 0.76.

Table 46. Program Impact Summary for Heating & Cooling and Water Heating

Heating &Cooling, and Water Heating	Year 10	Year 11	Year 12	Year 13	Year 14	Total	
Net Annual MWh Savings	5,034	5,843	6,521	4,832	5,042	27,271	
Net Annual MW Savings	3.18	3.32	3.44	1.75	1.79	13.47	
Measures	5,569	5,997	6,383	5,012	5,158	28,119	
Incentive Costs	\$2,367,466	\$2,578,053	\$2,765,361	\$1,962,915	\$2,028,553	\$11,702,348	
Non-Incentive Costs	\$748,913	\$715,486	\$774,752	\$563,428	\$583,861	\$3,386,440	
Total Program Costs	\$3,116,380	\$3,293,538	\$3,540,114	\$2,526,343	\$2,612,414	\$15,088,788	
TRC Ratio		1.02					
UCT Ratio	1.46						
Net-to-Gross Ratio			0	.76			

11.2.4 Program Enhancements

DESC has found significant success with the heating and cooling offerings in the past. In order to continue the success of the program, DESC has increased the rebates offered for the lower SEER HVAC equipment. In this manner, DESC will be able to have the greatest impact on the greatest number of customers. In addition, DESC is offering a higher rebate for the replacement of electric resistance heating, which results in greater savings for the customer. DESC also is adding a rebate for electric heat pump water heaters, which can provide a customer with significant electricity savings over an electric resistance water heater.



11.3 Residential Home Energy Check-up Program

11.3.1 Program Design

The Residential Home Energy Check-up (HEC) program currently provides electric customers in the DESC territory with a home visit that includes a free visual inspection of the home and an energy consultation. During the check-up, DESC representatives, who are Building Performance Institute (BPI) certified, identify sources of high energy use and provide the customer with a list of various low- and no-cost energy-saving recommendations and tips. As part of the consultation with the customer, DESC reviews up to two years of consumption data and weather impacts, as well as discusses energy-saving behaviors (e.g., thermostat settings, turning lights off, changing air filters, water heater settings). During the check-up, customers also receive a leave-behind energy efficiency kit consisting of ENERGY STAR® bulbs and water heater tank wrap and pipe insulation, as appropriate. For the expanded version of the program, participants may also be provided with the direct installation of LEDs, low-flow faucet aerators and/or low-flow showerheads and other cost effective measures at no additional cost. In addition, DESC will also be offering incentives for customers who want to install Tier 2 measures, which include air sealing, home insulation, and other home shell measures.

11.3.2 Rebate Table

The current and anticipated incentive payment per measure is provided in Table 47. DESC anticipates updating the incentive payments as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation.

Table 47. Program Incentives Summary for Residential Home Energy Check-up Program

Residential Home Energy Check-up Program						
Measure Description	Per Unit Incentive					
Home Consultation	100% of cost					
LEDs	100% of cost					
Low-flow faucet aerators	100% of cost					
New Measure Description	Per Unit Incentive					
Low-flow showerheads	100% of cost					
Tier 2 – Air Sealing	Up to 75% of cost					
Tier 2 – Home Insulation	Up to 75% of cost					
Tier 2 – Misc. Home Shell Measures	Up to 75% of cost					

11.3.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 1.00, reduce energy demand by 6.06 MW and energy consumption by 27,406 MWh, and cost \$15,824,059. Year-by-year impacts are summarized in Table 48. The assumed NTG ratio is 0.80.

Table 48. Program Impact Summary for Home Energy Check-up

Home Energy Check-up	Year 10	Year 11	Year 12	Year 13	Year 14	Total
Net Annual MWh Savings	4,947	5,392	5,650	5,722	5,696	27,406
Net Annual MW Savings	0.85	1.12	1.29	1.38	1.42	6.06
Measures installed	1,232,185	1,816,224	2,211,173	2,418,244	2,521,653	10,199,478
Estimated Homes	3,604	3,652	3,700	3,749	3,799	18,504
Incentive Costs	\$1,448,512	\$1,718,321	\$1,890,997	\$1,967,062	\$1,990,699	\$9,015,591
Non-Incentive Costs	\$1,092,005	\$1,297,062	\$1,428,394	\$1,486,400	\$1,504,606	\$6,808,468
Total Program Costs	\$2,540,518	\$3,015,383	\$3,319,392	\$3,453,462	\$3,495,305	\$15,824,059



TRC Ratio	1.00
UCT Ratio	0.83
Net-to-Gross Ratio	0.80

11.3.4 Program Enhancements

The Home Energy Check-up program has proven to be popular with DESC customers. In line with evolving the program, DESC continues to consistently evaluate new measures that prove to be cost-effective for direct installation and may include additional measures in the future should they prove to be popular with targeted customers.

In addition, DESC has included incentives for the Tier 2 measures, which aim to increase the efficient operation of the overall house. These measures include home insulation, improvements for duct work and air sealing, and other home shell efficiency measures. DESC will continue to monitor these measures and provide rebates for similar measures as they prove to be popular with customers and deliver energy savings.



11.4 Residential Home Energy Reports

11.4.1 Program Design

The Residential Home Energy Reports (HER) program offers qualifying customers monthly/bimonthly reports comparing their energy usage to a peer group and to themselves over time. The reports also provide information to help participants identify, analyze, and act on energy efficiency upgrade opportunities and energy-saving behaviors to reduce their household energy use. Reports are provided to customers at no additional cost.

11.4.2 Rebate Table

The HER program does not maintain a traditional "incentive" structure. Instead, the cost of the reports, messaging and access to the online portal for participants are counted as "rebates" and will continue to be accrued as such.

11.4.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 1.88, reduce energy demand by 9.27 MW and energy consumption by 24,473 MWh, and cost \$4,742,962. Year-by-year impacts are summarized in Table 49. The assumed NTG ratio is 1.00.

Table 49. Program Impact Summary for Home Energy Reports

Home Energy Reports	Year 10	Year 11	Year 12	Year 13	Year 14	Total	
Net Annual MWh Savings	2,606	2,641	2,676	8,205	8,345	24,473	
Net Annual MW Savings	0.99	1.00	1.01	3.11	3.16	9.27	
Measures	37,647	38,144	38,648	80,906	81,974	277,319	
Incentive Costs	\$342,964	\$347,493	\$352,083	\$1,393,141	\$1,411,540	\$3,847,221	
Non-Incentive Costs	\$121,600	\$123,206	\$124,833	\$261,325	\$264,777	\$895,740	
Total Program Costs	\$464,564	\$470,699	\$476,916	\$1,654,466	\$1,676,317	\$4,742,962	
TRC Ratio		1.88					
UCT Ratio		0.32					
Net-to-Gross Ratio		1.00					

11.4.4 Program Enhancements

DESC is currently researching ways to garner more participation and encourage use of the web portal portion of the HER program while targeting higher energy users. It is expected that, by PY13, the HER program will move to an opt-out offering instead of opt-in. Through this method, DESC expects to increase participation and savings per participant since these customers are new to the program and are receiving messaging for the first time.



11.5 Residential Neighborhood Energy Efficiency Program

11.5.1 Program Design

The Residential Neighborhood Energy Efficiency program (NEEP) provides qualifying customers with energy education, an on-site energy survey of the dwelling, and direct installation of low-cost energy-saving measures at no additional cost to the customer. The program is delivered in a neighborhood door-to-door sweep approach and offers customers who are eligible and wish to participate a variety of direct installation energy efficiency measures. The program approaches neighborhoods that have at least 50% of households with income levels equal to or less than 150% of the poverty line as defined by the federal government. A subset of mobile home customers (approximately 125 per year) are offered additional measures to address these specific home types.

11.5.2 Rebate Table

The current incentive payment per measure is provided in Table 50. DESC anticipates updating the incentive payments and measures as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation. All measures are provided at no additional cost to the customer and are directly installed. New cost-effective measures will be added as the availability arises. Below is a table of measures, which may be expanded at any time, as needed, throughout the program period.

Table 50. Program Incentives Summary for Residential Neighborhood Energy Efficiency Program

Residential Neighborhood Energy Efficiency Program					
Core Measure Description	Per Unit Incentive				
LEDs	100% of cost				
HVAC Filters	100% of cost				
Low-Flow Faucet Aerators	100% of cost				
Advanced Power Strips	100% of cost				
Water Heater Blankets / Water Heater Pipe Wrap	100% of cost				
Water Heater Turn Down	100% of cost				
Mobile Home Measure Descriptions	Per Unit Incentive				
Air Sealing (various levels of leakage reduction)	100% of cost				
Duct Sealing with >10% reduction	100% of cost				
Belly Board Insulation / Repair	100% of cost				
Programmable Communicating/Wi-Fi Thermostat	100% of cost				
Reflective Roof Coating	100% of cost				
Attic Plug & fill Insulation (>R30)	100% of cost				

11.5.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 5.90, reduce energy demand by 2.78 MW and energy consumption by 24,439 MWh, and cost \$4,700,645. Year-by-year impacts are summarized in Table 51. The assumed NTG ratio is 1.00.

Table 51. Program Impact Summary for Neighborhood Energy Efficiency

Neighborhood Energy Efficiency	Year 10	Year 11	Year 12	Year 13	Year 14	Total
Net Annual MWh Savings	4,975	4,929	4,885	4,844	4,805	24,439
Net Annual MW Savings	0.56	0.56	0.56	0.55	0.55	2.78
Measures	106,902	106,762	106,661	106,598	106,572	533,494
Estimated homes	4,243	4,299	4,355	4,413	4,471	21,781



Neighborhood Energy Efficiency	Year 10	Year 11	Year 12	Year 13	Year 14	Total
Incentive Costs	\$760,387	\$752,887	\$745,765	\$739,012	\$732,619	\$3,730,671
Non-Incentive Costs	\$197,701	\$195,751	\$193,899	\$192,143	\$190,481	\$969,974
Total Program Costs	\$958,088	\$948,638	\$939,664	\$931,155	\$923,100	\$4,700,645
TRC Ratio	5.90					
UCT Ratio	2.12					
Net-to-Gross Ratio			1	.00		

11.5.4 Program Enhancements

The NEEP offering has proven to be popular with customers and the community officials that assist in promoting the program. DESC will continue to further expand and deliver savings and services for hard-to-reach communities using the existing neighborhood sweep approach. Additionally, DESC will prioritize this program to deliver energy savings to some of its most needy customers by serving even more customers during the PY10–PY14 period. Participation is expected to increase approximately 25% over previous program years.



11.6 Residential EnergyWise Savings Store

11.6.1 Program Design

The Residential EnergyWise Savings Store program provides online incentivizes to residential electric customers to purchase and install high-efficiency ENERGY STAR® LED lighting products, advanced power strips and other energy efficiency measures. The program is designed to provide education regarding lighting and associated energy savings and offers an easy-to-use online marketplace for customers that results in low-cost, high-efficiency options. Customers must provide a valid DESC account number in order to make purchases through the online store.

11.6.2 Rebate Table

The currently anticipated incentive payment per measure is provided in Table 52. DESC anticipates updating the incentive payments as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation.

Table 52. Program Incentives Summary for Residential Online Store

Residential Online Store				
Measure Description	Per Unit Incentive			
LEDs – Standard	Up to \$3			
LEDs – Specialty	Up to \$6			
LEDs – Connected	Up to \$10			
Smart Thermostats	Up to \$75			
Low-Flow Faucet Aerators	Up to \$5			
Low-Flow Showerheads	Up to \$10			
Advanced Power Strips	Up to \$20			

11.6.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 8.15, reduce energy demand by 1.67 MW and energy consumption by 19,799 MWh, and cost \$1,879,266. Year-by-year impacts are summarized in Table 53. The assumed NTG ratio is 0.80.

Table 53. Program Impact Summary for Online Store

Online Store	Year 10	Year 11	Year 12	Year 13	Year 14	Total
Net Annual MWh Savings	5,439	6,000	6,503	895	962	19,799
Net Annual MW Savings	0.49	0.51	0.53	0.07	0.08	1.67
Measures	112,540	115,917	118,980	8,402	9,030	364,869
Incentive Costs	\$416,517	\$486,170	\$548,677	\$39,573	\$42,530	\$1,533,467
Non-Incentive Costs	\$96,302	\$110,268	\$122,807	\$7,915	\$8,506	\$345,799
Total Program Costs	\$512,819	\$596,439	\$671,484	\$47,488	\$51,036	\$1,879,266
TRC Ratio	8.15					
UCT Ratio	4.51					
Net-to-Gross Ratio			0.	80		



11.6.4 Program Enhancements

DESC has been operating the online store to provide discounts on lighting products to its customers throughout the PY7–PY9 period. New to the online store is the addition of smart thermostats to provide deeper heating and cooling savings to the participants.



11.7 Multifamily

11.7.1 Program Design

The Multifamily program will focus on helping customers living in non-single family dwellings, as well as apartment building owners and managers, overcome the split-incentive and other market barriers to residential energy efficiency. The split incentive barrier exists in rental situations: non-occupant building owners are less inclined to make efficiency upgrades when they do not pay efficiency bills, and renters are less likely to make efficiency upgrades because they do not own their dwelling.

The program will achieve this goal by directly installing LEDs and water-saving measures in apartments, and by providing high incentives (75%) for building common area measures, such as lighting and HVAC upgrades. Tenants that are DESC customers will benefit from lower energy bills, and from better quality lighting and other non-energy benefits. Building owners and managers may benefit from higher tenant satisfaction and retention.

Multifamily building owner owners and property managers are the program's primary target markets.

11.7.2 Rebate Table

The currently anticipated incentive payment per measure is provided in Table 52. DESC anticipates updating the incentive payments as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation.

Table 54. Program Incentives Summary for the Multifamily Program

Multifamily Program				
Measure Description	Per Unit Incentive			
LEDs – Standard	100% of cost			
LEDs – Specialty	100% of cost			
Low-Flow Faucet Aerators	100% of cost			
Low-Flow Showerheads	100% of cost			
Common Area Lighting and HVAC Upgrades	Up to 75%			

11.7.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 1.76, reduce energy demand by 2.85 MW and energy consumption by 18,627 MWh, and cost \$4,970,025. Year-by-year impacts are summarized in Table 53. The assumed NTG ratio is 0.90.

Table 55. Program Impact Summary for Multifamily Program

Multifamily	Year 10	Year 11	Year 12	Year 13	Year 14	Total
Net Annual MWh Savings	2,641	3,984	3,992	3,999	4,010	18,627
Net Annual MW Savings	0.40	0.61	0.61	0.61	0.62	2.85
Measures	10,721	16,193	16,259	16,330	16,406	75,909
Estimated MF units	1,358	2,023	1,990	1,958	1,927	9,256
Incentive Costs	\$485,814	\$734,489	\$738,495	\$739,832	\$744,245	\$3,442,875
Non-Incentive Costs	\$344,326	\$293,796	\$295,398	\$295,933	\$297,698	\$1,527,150
Total Program Costs	\$830,140	\$1,028,284	\$1,033,893	\$1,035,765	\$1,041,943	\$4,970,025
TRC Ratio	1.76					
UCT Ratio	1.54					
Net-to-Gross Ratio			0	.90		



11.7.4 Program Enhancements

Although the Neighborhood Energy Efficiency and Home Energy Check-up programs both include multifamily units, the specific targeting of multifamily properties is a new effort for DESC. DESC will continue to review the program during implementation, evaluation activities and optimize the program as needed.



11.8 Commercial and Industrial EnergyWise for Your Business

11.8.1 Program Design

The EnergyWise for Your Business program includes prescriptive and custom paths for non-residential customers. The prescriptive path offers a simplified method for making efficient choices on pre-defined energy efficiency measures without requiring complex analysis or participation rules. Incentives and claimed savings are based on pre-defined technologies and calculation methods and covers the majority of common energy-saving measures across most customers and end-use markets. This path, through its ease of use and understanding, provides an effective way to reach all commercial and industrial customers.

The custom path supports customers in identifying and implementing more complex site-specific opportunities through measures not addressed by the prescriptive measures. The segment provides incentives and technical assistance to customers seeking to improve the efficiency of existing facilities, as well as at the time of new equipment purchases, facility modernization, and new construction. Custom projects must be able to show specific and verifiable energy savings and costs, typically developed by a third-party firm.

The EnergyWise for Your Business program is available to all qualifying non-residential customers who have not elected to opt-out, and targets all cost-effective energy efficiency retrofit opportunities.

11.8.2 Rebate Table

The currently anticipated incentive payment per measure is provided in Table 56. DESC anticipates updating the incentive payments as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation.

Table 56. Program Incentives Summary for EnergyWise for Your Business

EnergyWise for Your Business					
Measure Description	Per Unit Incentive				
Lighting					
Fixture replacements or upgrades	\$0.35 per watt reduced; up to 50% of project cost				
Complete lighting design for new construction	\$0.40 per watt reduced				
HVAC					
HVAC Variable Frequency Drive	\$50 per horsepower				
HVAC Chillers	\$10 – \$30 per ton				
Water and evaporative or unitary and unmatched split AC and HP Systems	\$15 – \$75 per ton				
PTAC and PTHP Systems	\$20 – \$35 per ton				
Food Service					
High-Efficiency Food Preparation Equipment	\$300 – \$1,000 per unit				
High-Efficiency ice makers, clothes washers, or reach-in	\$20 – \$150 per unit				
Custom					
Labor and material/equipment costs for retrofit projects	Up to 50%				
Incremental material/equipment for new construction/major renovation	Up to 75%				



11.8.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 1.84, reduce energy demand by 57.14 MW and energy consumption by 252,196 MWh, and cost \$54,500,855. Year-by-year impacts are summarized in Table 57. The assumed NTG ratio is 0.70.

Table 57. Program Impact Summary for EnergyWise for Your Business

EnergyWise for Your Business	Year 10	Year 11	Year 12	Year 13	Year 14	Total
Net Annual MWh Savings	37,076	45,753	54,278	56,593	58,497	252,196
Net Annual MW Savings	8.75	10.52	12.18	12.64	13.04	57.14
Measures	88,397	110,605	131,063	137,792	144,390	612,246
Estimated Projects	891	919	947	959	971	4,687
Incentive Costs	\$5,058,290	\$6,478,576	\$7,805,134	\$8,110,737	\$8,375,397	\$35,828,135
Non-Incentive Costs	\$2,975,826	\$3,234,448	\$4,364,850	\$4,002,212	\$4,095,384	\$18,672,720
Total Program Costs	\$8,034,116	\$9,713,024	\$12,169,984	\$12,112,949	\$12,470,781	\$54,500,855
TRC Ratio	1.84					
UCT Ratio	2.16					
Net-to-Gross Ratio		•	(0.70		

11.8.4 Program Enhancements

The DESC EnergyWise for Your Business prescriptive offerings are constantly reviewed and compared against market conditions, industry best practices, and energy codes, as well as direct experience to date. On an annual basis, or more frequently, if needed, DESC reviews the current measures and incentive amounts to ensure that they are relevant and palatable in the marketplace and adhere to energy codes.

DESC also plans to offer the industrial class customers, who have not already opted-out of the programs by identifying specific measures and market trends that are already part of the current program offerings that could initiate some increased engagement and interest from this sector. DESC will bring this to market in the form of -industry-specific applications that highlight these measures, trainings geared toward market and technology trends in this sector, and additional testimonials and marketing efforts that will energize the interest of these customers.

In addition, DESC is including an agricultural component in the program. Measures included within this offering are related to specific agricultural uses, including lighting, pumping, ventilation, water cooling, and water heating. Also included within the EnergyWise program is a component including Strategic Energy Management (SEM). SEM helps businesses reduce their energy costs with tools, coaching, and technical resources to support energy goals through a year-long series of workshops and one-on-one coaching. The component draws on the principles of continuous improvement and organizational change, and integrates cost savings and operational excellence initiatives. The offering helps implement organizational structures, behavior changes, and systematic practices that can lead to significant energy and cost savings. The SEM offering will be targeted towards industrial customers, which as previously discussed, have a reduced participation rate due to the high rate of opt-out of large industrial customers.



11.9 Small Business Direct Install (SBDI)

11.9.1 Program Design

The Small Business Direct Install program provides cost-effective, comprehensive retrofit services to small business customers on a turnkey basis. The program is available to small business and nonprofit customers with five or fewer electric service accounts and an annual energy use of 350,000 kWh or less. The program offers these small business customers the opportunity to receive financial incentives, as well as educational and technical assistance for projects involving the replacement of existing equipment where the equipment being replaced continues to function, but is outdated and energy inefficient. SBDI identifies cost-effective efficiency retrofit opportunities and provides the direct installation of measures, financial incentives, and other strategies to encourage early replacement of existing equipment with high-efficiency alternatives.

Customer incentives are provided to reduce a significant portion of the cost of installing energyefficient equipment and are based on the total installed cost of the retrofits. All qualifying customers are eligible for an incentive of up to 90% of the total installation costs for lighting and refrigeration measures. Because of the unique and hard-to-reach customer base that small businesses



represent, the program is designed to overcome the most common barriers to participation for these customers, which include the following:

- Business owners without technical expertise or time to devote to energy efficiency improvements
- Diversity of the small commercial sector in terms of business types
- Limited access to investment capital

11.9.2 Rebate Table

The currently anticipated incentive payment per measure is provided in Table 58. DESC anticipates updating the incentive payments as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation.

Table 58. Program Incentives Summary for Small Business Direct Install Program

Small Business Direct Install Program					
Measure Description	Per Unit Incentive				
On-site energy analysis	100% of cost				
Energy-efficient lighting and refrigeration	Up to 90% of cost				

11.9.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 1.91, reduce energy demand by 20.57 MW and energy consumption by 71,541 MWh, and cost \$13,095,699. Year-by-year impacts are summarized in

Table 59. The assumed NTG ratio is 0.95.

Table 59. Program Impact Summary for Small Business Direct Install

Small Business Direct Install	Year 10	Year 11	Year 12	Year 13	Year 14	Total
Net Annual MWh Savings	8,718	12,840	15,546	16,900	17,537	71,541
Net Annual MW Savings	2.48	3.67	4.47	4.87	5.07	20.57
Measures	110,227	173,487	210,108	228,253	236,420	958,495
Incentive Costs	\$1,025,605	\$1,519,888	\$1,795,390	\$1,905,446	\$1,938,483	\$8,184,812
Estimated Projects	678	968	928	758	744	4,076
Non-Incentive Costs	\$615,363	\$911,933	\$1,077,234	\$1,143,267	\$1,163,090	\$4,910,887
Total Program Costs	\$1,640,968	\$2,431,821	\$2,872,624	\$3,048,713	\$3,101,573	\$13,095,699
TRC Ratio	1.91					
UCT Ratio	1.82					
Net-to-Gross Ratio			0.	95		

11.9.4 Program Enhancements

The SBDI program has proven to be popular with DESC small business customers; however, DESC believes that there is still space to grow this program. In order to grow the program, DESC is increasing the incentive level to 90% of project cost to reduce the barrier to entry for some hard-to-reach customers. DESC will continue to monitor the success and popularity of the program, remain



in contact with customers and key trade allies, and evolve the program as it learns through its implementation experience.



11.10 Municipal LED Lighting

11.10.1 Program Design

DESC will be working with municipalities in the service territory to replace all street lights with high-efficiency LED street lights. Incentives will allow for a financial neutral option for municipalities to convert while improving lighting performance, providing remote monitoring/outage communications/control, faster repair response times and better overall customer experience. DESC has already begun seeking input and engaging municipalities interest about the offering. The program plans to replace approximately 54K municipal overhead fixtures with LED fixtures over the next 3-5 years. This program plan is based on a full five-year implementation schedule.

11.10.2 Rebate Table

The currently anticipated incentive payment per measure is provided in Table 60. DESC anticipates updating the incentive payments as program participation, evaluation results, baseline shifts, or other factors dictate during the finalization of program planning and during implementation.

Table 60. Program Incentives Summary for Municipal LEDs

Municipal LEDs				
Measure Description	Per Unit Incentive			
LED Street Lights	100% of incremental cost			

11.10.3 Impact and Cost-Effectiveness Summary

Over five years, the program is anticipated to have a TRC benefit-cost ratio of 2.37, reduce energy demand by 0.00 MW and energy consumption by 19,070 MWh, and cost \$19,993,079. Year-by-year impacts are summarized in

Table 61. The assumed NTG ratio is 1.00.

Table 61. Program Impact Summary for Municipal LED Lighting

Municipal LED Lighting	Year 10	Year 11	Year 12	Year 13	Year 14	Total
Net Annual MWh Savings	3,017	4,307	3,876	4,186	3,684	19,070
Net Annual MW Savings	0.00	0.00	0.00	0.00	0.00	0.00
Measures / LED Fixtures installed	3,499	5,065	4,558	4,923	4,332	22,377
Incentive Costs	\$2,342,663	\$3,384,309	\$3,045,878	\$3,289,549	\$2,894,803	\$14,957,202
Non-Incentive Costs	\$873,079	\$1,116,822	\$1,005,140	\$1,085,551	\$955,285	\$5,035,877
Total Program Costs	\$3,215,742	\$4,501,131	\$4,051,018	\$4,375,100	\$3,850,088	\$19,993,079
TRC Ratio			2	.37		
UCT Ratio			0	.42		
Net-to-Gross Ratio			1	.00		

11.10.4 Program Enhancements

This is a new program that DESC anticipates will be extremely well received by municipalities in the territory. DESC expects to exhaust the availability of the potential in this program within the five-year program period.



12. CONCLUSIONS

With this portfolio, DESC is proposing programs that cost-effectively meet the needs of a broad range of customers, including hard-to-reach customers. These programs build on the momentum that DESC has created during the past nine years; reflect the impact of changing baselines; and incorporate feedback from customers, key trade allies, the third-party evaluator, and other stakeholders. They build on the knowledge gained in the Potential Study analysis and will continue to adapt to changing customer needs.



APPENDICES

A. Additional Scenario – Planned AMI Installation

The study included an additional analysis of a scenario where AMI meters are expected to be installed for all customers by 2022. This scenario provides opportunities for the rate-based DR programs to be deployed on a larger scale, and thus increase the potential contribution of load reduction from DR by 2029. One assumption made to model this scenario is that the deployment schedule is done in such a way that if a customer wants to participate in a rate-based program (Critical Peak Pricing [CPP] or Time of Use [ToU], in this case), then priority for installation will be given to those customers. In this manner, the participation numbers are not limited by AMI, especially since the number of customers interested in the program is not expected to exceed AMI installations.

Figure 30. AMI Installations – (a) Required and (b) Expected


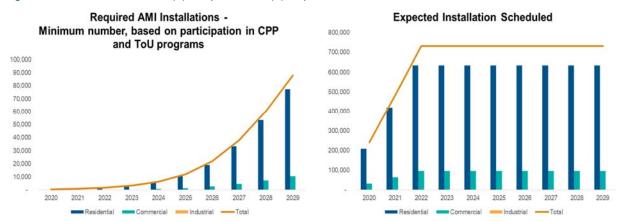


Figure 30(a) shows the required number of AMI installations required based on the maximum participation levels possible for ToU and CPP programs, while Figure 30(b) shows the ICF expected installation schedule for the AMIs (based on linear growth until 2022, when the installations for all customers are expected to be completed). Note the difference in axes in the two charts. Assuming the scheduling of installation followed will be as described in the previous paragraph, the participation will not be limited by the AMIs.

Figure 31. Additional AMI Scenario - DR Potential

2029 Winter MW potential savings

2029 Winter MW potential savings, Stacked savings by program

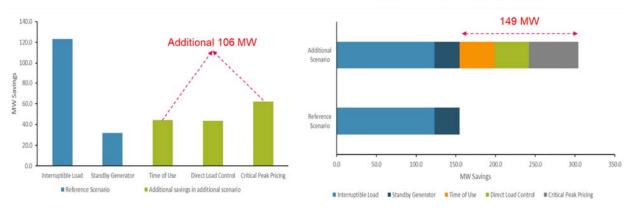



The additional potential from these expected AMI installations and resulting programs is shown in Figure 31. The additional potential achieved due to installation of further AMIs is 106 MW, from the ToU and CPP programs. This totals 149 MW in 2029, including the DLC program that contributed to the expanded scenario analyzed in the main content. Since the AMI installations are assumed to be completed by the utility, no additional cost is incurred by the customer for these programs, and the high participation levels as the years progress offset the initial costs for the CPP program, making it cost-effective in this scenario.




B. Avoided Costs


For the avoided capacity cost calculation, a resource plan populated with internal combustion turbines (ICT) is used. DESC calculates the incremental capital investment related revenue required to support the ICT resource plan. DESC derives a change case in its resource plan by adding a 100 MW purchase then adjusting the expansion plan accordingly. The difference in the revenue requirement between the base case and the change case defines the avoided capacity cost. For the purposes of this calculation, a value of \$63.37 per kW (in 2019 dollars), which is inclusive of transmission and distribution, was used along with the application of a 15% peak line-loss factor and a 14% reserve margin factor.

For the avoided energy cost calculation, the base case is defined by DESC's existing fleet of generators plus any projected future generators, as well as the solar facilities with which DESC has executed a power purchase agreement. The change case is the same as the base case except that the hourly loads are reduced by a 100 MW EE profile. The avoided energy cost is simply the difference between the base case costs and the change case costs. For the purposes of this calculation, a value of \$0.0358 per kWh (in 2019 dollars) was used, followed by the application of a 8% average line-loss factor.



C. Payback Curves

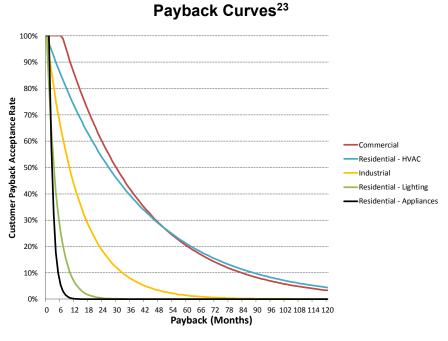

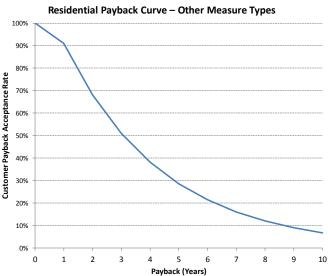

Payback Acceptance Data Sources:

1. <u>Commercial</u>. ICF survey of 231 non-residential customers on decision making criteria for selecting efficient HVAC units. Conducted in 2013 for a confidential utility.

²³ To collect the data used to develop the payback curves in the first graph, customers were asked about payback acceptance in months. To collect the data used to develop the "Residential Payback Curve - Other," the survey asked customers about payback acceptance in years.



- 2. <u>Residential HVAC</u>. ICF survey of 300 residential customers on decision making criteria for selecting efficient HVAC units. Conducted in 2013 for a confidential utility.
- 3. <u>Industrial</u>. U.S. Department of Energy, Industrial Assessment Center (IAC) data on industrial efficient measure implementation in Louisiana. Data accessed in 2014.
- 4. <u>Residential Lighting</u>. ICF survey of 300 residential customers on decision making criteria for selecting efficient lighting. Conducted in 2013 for a confidential utility.
- 5. <u>Residential Appliance</u>. ICF survey of 300 residential customers on decision making criteria for selecting efficient appliances. Conducted in 2013 for a confidential utility.
- 6. <u>Residential Other Measure Types</u>. Based upon national survey of residential customers by the Shelton Group (2006).

Notes:

- The above payback acceptance curves plot months or years of simple payback against
 customer stated payback acceptance rates, with the exception of the industrial curve where
 actual payback from implemented efficiency measures was utilized to develop the curve. As
 stated in the body of this report, payback acceptance curves were not used in forecasting
 participation for all measures they were used only for measures where payback is a valid
 proxy for financial acceptance.
- The table below shows which Participation Approach (see Approach section of main report for descriptions of Approach A and Approach B) was used by measure group by program, the payback curve used, where applicable, and net-to-gross ratios.



				MEASURE DESCRIPTION								MEASURE INCREMENTAL SAV	/INGS PER UNIT	
Measure Sector	Sub-Sector	Building Type	End Use	Measure Name	Efficient Measure Definition	Measure Unit Name	Retrofit (RET), Replace-on- Burnout (ROB), or New Construction	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost	Annual kWh Savings	Annual kW Annual Gas Coincident Savings Peak Savings (Therms)	Annual kWh Increases Peak Increa	nt Therms
							(NEW)							
1 Residential 2 Residential	Mobile Mobile	Heat Pump Heat Pump	HVAC HVAC	Packaged ASHP Split ASHP - SEER 15	SEER 15 SEER 15	per 3 ton unit	ROB ROB	18	18	\$524.0 \$524.0	576 1,528	0.44 (1.31 (0	0.00 0
3 Residential 4 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Packaged ASHP Packaged ASHP	SEER 15 SEER 16	per 3 ton unit	ROB ROB	18 18	18	\$524.0 \$1,047.9	900 1,148	0.77 (0.83 (0	0.00 0
5 Residential 6 Residential 7 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Packaged DFHP Packaged AC	SEER 16	per 3 ton unit per 3 ton unit per 3 ton unit	ROB ROB	18 18 18	18 18 18	\$289.9 \$555.7 \$425.8	809 809		0	0.00 0 0.00 0
8 Residential 9 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	AC AC Heat Pump	HVAC HVAC	Packaged A/C Solit ASHP		per 3 ton unit	ROB ROB	18	18 18	\$713.1 \$524.0	299 464 859	0.25 0 0.39 0 0.72 0	0	0.00 0 0.00 0
10 Residential 11 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split ASHP Solit ASHP	SEER 16	per 3 ton unit	ROB ROB	18 18	18 18	\$1,047.9 \$1,571.9	1,147 1,393	0.83 (0	0.00 0 0.00 0
12 Residential 13 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split ASHP Split ASHP	SEER 18	per 3 ton unit	ROB ROB	18	18	\$2,095.8 \$2,619.8	1,521 1,623	1.24 (0	0.00 0 0.00 0
14 Residential 15 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split ASHP Split ASHP	SEER 20 SEER 21	per 3 ton unit	ROB ROB	18 18	18 18	\$3,143.7 \$3,667.7	1,554 2,141	1.35 (1.79 (0 0	0.00 0 0.00 0
16 Residential 17 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split ASHP Split ASHP	SEER 22 SEER 23	per 1 ton unit per 1 ton unit	ROB ROB	18 18	18 18	\$1,397.2 \$1,571.9	690 669	0.59 0 0.57 0	0	0.00 0 0.00 0
18 Residential 19 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split ASHP Split ASHP	SEER 25 SEER 26	per 1 ton unit per 1 ton unit	ROB ROB	18 18	18 18	\$1,921.2 \$2,095.8	690 719	0.58 (0.59 (0	0.00 0 0.00 0
20 Residential 21 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split ASHP Split ASHP		per 1 ton unit	ROB ROB	18 18	18 18	\$2,270.5 \$2,794.4	1,501 1,403	0.46 (0.59 (0	0.00 0 0.00 0
22 Residential 23 Residential 24 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump Heat Pump Heat Pump	HVAC HVAC HVAC	Split ASHP Split DFHP Solit DFHP	SEER 15	per 1 ton unit per 3 ton unit per 3 ton unit	ROB ROB ROB	18 18 18	18 18 18	\$3,206.6 \$289.9 \$555.7	1,599 576 1,293	0.34 (0.44 (0.93 (0	0.00 0 0.00 0
25 Residential 26 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split DFHP Split DFHP	SEER 17	per 3 ton unit	ROB ROB	18 18	18 18	\$833.6 \$1,189.1	1,398 1,198	1.09 (1.01)	0	0.00 0
27 Residential 28 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split DFHP Split DFHP	SEER 19	per 3 ton unit	ROB ROB	18 18	18 18	\$1,546.1 \$1,903.1	2,386 2,534	1.90 (0	0.00 0 0.00 0
29 Residential 30 Residential	All Not Multifamily All Not Multifamily	AC AC	HVAC HVAC	Split A/C Split A/C	Seer 15	per 3 ton unit	ROB ROB	18 18	18 18	\$425.8 \$713.1	334 484	0.28 0 0.40 0	0	0.00 0
31 Residential 32 Residential	All Not Multifamily All Not Multifamily	AC AC	HVAC HVAC	Split A/C Split A/C	Seer 17 Seer 18	per 3 ton unit	ROB ROB	18 18	18 18	\$999.8 \$1,286.5	566 604	0.49	0	0.00 0 0.00 0
33 Residential 34 Residential	All Not Multifamily All Not Multifamily	AC AC	HVAC HVAC	Split A/C Split A/C	Seer 20	per 3 ton unit per 3 ton unit	ROB ROB	18 18	18 18	\$1,574.6 \$1,861.3	707 910	0.56 (0.70 (0 0	0.00 0 0.00 0
35 Residential 36 Residential	All Not Multifamily All Not Multifamily	AC AC	HVAC HVAC	Split A/C Duct Work Replacement AC		per 3 ton unit	ROB RET	18 20	18 20	\$2,148.0 \$2,500.0	886 1,040	0.69 (0.48 25	0	0.00 0
37 Residential 38 Residential	All Not Multifamily All Not Multifamily	AC AC	HVAC HVAC	Duct Insulation AC Duct Sealing AC	Duct Sealing	per system per system	RET RET	20 18 18	20 18 18	\$673.3 \$554.0	361 706	0.17 9 0.33 17	0	0.00 0
39 Residential 40 Residential 41 Residential	All Not Multifamily All Not Multifamily	Heat Pump Heat Pump	HVAC HVAC	Duct Sealing HP Duct Work Replacement HP Duct Work Replacement HP		per system per system	RET RET RET	20	18 20	\$519.6 \$2,500.0	1,106 1,841 761	0.31 (0.48 (0.17 (0	0.00 0
42 Residential 43 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump All	Appliances Appliances	Duct Insulation HP Refrigerator Recycling Freezer Recycling	Duct Insulation Refrigerator Recycling Freezer Recycling	efrigerator reezer	RET RET	9	9 9	\$672.6 \$50.0 \$50.0	1,028 680	0.17 0.12 0.08	0	0.00 0 0.00 0 0.00 0
44 Residential 45 Residential	All Not Multifamily All Not Multifamily	All Electric Water Heater	Lighting Hot Water	5 LEDs Kit Faucet Aerators		per kit per aerator	RET RET	1 5	5	\$55.9 \$2.0	285 225	0.02 (0.01 (0	0.00 0 0.00 0
46 Residential 47 Residential	Low Income All Low Income All	All Heat Pump	Lighting HVAC	LED Lighting Misc (Low Income) HVAC Filter		Per lamp Per participant	RET RET	1	19	\$11.2 \$4.5	57 64	0.01 (0.02 (0	0.00 0 0.00 0
48 Residential 49 Residential	Low Income All Low Income All	AC/Gas Heat Electric Resistance Heat	HVAC /HVAC	HVAC Filter HVAC Filter	Filter - Electric Cooling Only (Low Income) Filter - Electric Heat Only (Low Income)	Per participant Per participant	RET RET	1	1	\$4.5 \$4.5	32 32	0.02 0 0.00 0	0	0.00 0 0.00 0
50 Residential 51 Residential	Low Income All Low Income All		Hot Water Hot Water	Faucet Aerator Pipe Insulation	Kitchen Faucet Aerator (Low Income) Pipe Wrap (Low Income)	Per Aerator per system	RET RET	10 5	10 5	\$9.5 \$5.0	225 69	0.01 (0.01 (0	0.00 0 0.00 0
52 Residential 53 Residential	Low Income All Low Income All	All Electric Water Heater	Hot Water	Advanced Smart-strip Water Heater Blanket	Advanced Smart-Strip (Low Income) Water Heater Blanket (Low Income)	Per strip Per blanket	RET RET	5 5	5 5	\$17.0 \$25.0	103 361		0	0.00 0 0.00 0
54 Residential 55 Residential	Low Income All	All All	Shell	AC Winterization Kit AC Winterization Kit		Per kit Per kit	RET RET	18	18 18	\$4.0 \$8.0	47 34	0.00	0	0.00 0
56 Residential 57 Residential 58 Residential	Low Income All Low Income All Low Income Mobile	Electric Water Heater	Shell Hot Water Other	AC Winterization Kit Water Heater Temperature Adjustment Dicital Switch Plate Wall Thermometer	AC Winterization kit - small (Low Income) Water Heater Temperature Adjustment (Low Income) Digital Switch Plate Wall Thermometer (Low Income)	Per kit Per WH Thermometers	RET RET RET	18 5	18 5	\$10.0 \$1.0 \$10.0	23 114 18	0.00 (0.01 (0.00 (0	0.00 0 0.00 0
59 Residential 60 Residential	Low Income Mobile Low Income Mobile	All	Shell Shell	Air Sealing Air Seiling		Participants Participants	RET	13	13 13	\$190.1 \$190.1	286 381		0	0.00 0
61 Residential 62 Residential	Low Income Mobile Low Income Mobile	All All	HVAC Shell	Duct Sealing Attic Plug & Fill Insulation	Duct Sealing with > 10% Reduction (Low Income) Attic Plug & Fill Insulation (R-30) (Low Income)	Participants Square Feet	RET RET	18	18	\$341.9 \$1.0	592 2	0.22 14 0.00 0	0	0.00 0 0.00 0
63 Residential 64 Residential	Low Income Mobile Low Income Mobile	All	Shell HVAC	Belly Board Repair Programmable Communicating Thermostat	Belly Board Repair (Low Income) Programmable Communicating Thermostat (Low Income)	Square Feet Thermostats	RET RET	25 10	25 10	\$0.6 \$42.7	1 645	0.00	0 0	0.00 0
65 Residential 66 Residential	Low Income Mobile Low Income Mobile	All	Shell Shell	Reflective Roof Coating Belly Board Insulation	Reflective Roof Coating (Low Income) Belly Board Insulation (R-19) (Low Income)	Square Feet Per square foot	RET RET	10 25	10 25	\$0.1 \$0.6	1	0.00	0	0.00 0 0.00 0
67 Residential 68 Residential	All Not Multifamily	AC/Gas Heat	Lighting Shell	LED Lighting Misc Attic Knee Wall Insulation	Online Marketplace Weighted Average R 19	oer bulb sqft	RET RET	20	19 20	\$11.2 \$0.6	57	0.01 (0	0.00 0
69 Residential 70 Residential 71 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	AC/Electric Resistance F Heat Pump AC/Gas Heat	Shell Shell	Attic Knee Wall Insulation Attic Knee Wall Insulation Attic Knee Wall Insulation	R 19	sqft sqft sqft	RET RET RET	20 20 20	20 20 20	\$0.6 \$0.6 \$1.0	1	0.00 (0.00 (0.00 (0	0.00 0 0.00 0
72 Residential 73 Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance F Heat Pump		Attic Knee Wall Insulation Attic Knee Wall Insulation		sqft sqft	RET	20	20	\$1.0 \$1.0 \$1.0	2	0.00	0	0.00 0 0.00 0
74 Residential 75 Residential	All Not Multifamily All Not Multifamily	AC/Gas Heat	Shell Shell	Ceiling Insulation Ceiling Insulation	R 38	sqft sqft	RET RET	20 20.0	20 20	\$1.2 \$1.2	0	0.00 (0	0.00 0 0.00 0
76 Residential 77 Residential	All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat	Shell Shell	Ceiling Insulation Ceiling Insulation		sqft sqft	RET RET	20.0 20.0	20 20	\$1.2 \$1.6	1 0	0.00		0.00 0 0.00 0
78 Residential 79 Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance F Heat Pump	Shell	Ceiling Insulation Ceiling Insulation		sqft sqft	RET RET	20.0 20.0	20 20	\$1.6 \$1.6	2 1	0.00 (0.00 (0.00 0 0.00 0
80 Residential 81 Residential	All Not Multifamily All Not Multifamily	AC/Gas Heat AC/Electric Resistance H		Wall Insulation Wall Insulation	R-13	sqft sqft	RET RET	20.0 20.0	20 20	\$0.4 \$0.4	0 2	0.00 (0.00 (0	0.00 0 0.00 0
82 Residential 83 Residential 84 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat AC/Electric Resistance F	Shell Shell	Wall Insulation Wall Insulation Wall Insulation	R-13 R-23 R-23	sqft sqft sqft	RET RET RET	20.0	20 20 20	\$0.4 \$0.7 \$0.7	0	0.00 0 0.00 0 0.00 0	0	0.00 0 0.00 0 0.00 0
85 Residential 86 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat	Shell Shell	Wall Insulation Floor Insulation	R-23	sqft sqft	RET RET	20.0 20.0 20.0	20 20 20	\$0.7 \$0.7 \$0.9	1	0.00 0 0.00 0	0	0.00 0 0.00 0
87 Residential 88 Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance F Heat Pump		Floor Insulation Floor Insulation	Floor Insulation (R-19)	sqft sqft	RET RET	20.0 20.0 20.0	20 20 20	\$0.9 \$0.9	0	0.00	0	0.00 0 0.00 0
89 Residential 90 Residential	All Not Multifamily All Not Multifamily	AC/Gas Heat AC/Electric Resistance H	Shell	Crawlspace Encapsulation Crawlspace Encapsulation	Crawlspace Encapsulation (R-19)	sqft sqft	RET RET	20.0 20.0	20 20	\$0.9 \$0.9	0 2	0.00 (0	0.00 0 0.00 0
91 Residential 92 Residential	All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat	Shell Shell	Crawlspace Encapsulation Roof Deck Insulation	Crawlspace Encapsulation (R-19) R-19	sqft sqft	RET RET	20.0 20.0	20 20	\$0.9 \$0.6	0	0.00 (0.00 (0	0.00 0 0.00 0
93 Residential 94 Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance F Heat Pump	Shell	Roof Deck Insulation Roof Deck Insulation	R-19	sqft sqft	RET RET	20.0	20 20	\$0.6 \$0.6	2 1	0.00	0	0.00 0
95 Residential 96 Residential 97 Residential	All Not Multifamily All Not Multifamily	AC/Gas Heat AC/Electric Resistance H	Shell Shell	Roof Deck Insulation Roof Deck Insulation Roof Deck Insulation	R-38	sqft sqft	RET RET RET	20.0	20 20 20	\$1.2 \$1.2 \$1.2	1 2	0.00 0 0.00 0	0	0.00 0 0.00 0
98 Residential 99 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat AC/Electric Resistance H	Shell	Roof Deck Insulation Radiant Barriers Radiant Barriers		sqft sqft	RET RET	20.0 25.0 25.0	20 25 25	\$1.2 \$0.2 \$0.2	0	0.00 0 0.00 0	0	0.00 0 0.00 0
100 Residential 101 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat	Shell Shell	Radiant barriers Radiant Barriers ENERGY STAR Windows	Ceiling insulation > R-19W/radiant barrier Ceiling insulation > R-19W/radiant barrier Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - S	sqft sqft	RET ROB	25.0 25.0 20.0	25 25 20	\$0.2 \$0.2 \$17.2	0	0.00	0	0.00 0 0.00 0
102 Residential 103 Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance H Heat Pump	Shell Shell	ENERGY STAR Windows ENERGY STAR Windows	Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - S Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - S Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - S	sqft	ROB ROB	20.0 20.0 20.0	20 20 20	\$33.9 \$22.9	5	0.00	0	0.00 0 0.00 0
104 Residential 105 Residential	All Not Multifamily All Not Multifamily	AC/Gas Heat AC/Electric Resistance H	Shell Shell	ENERGY STAR Windows ENERGY STAR Windows	Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - Energy Star Southern Climate Zone Wi	sqft sqft	ROB ROB ROB	20.0	20 20	\$11.0 \$25.3	2	0.00	0 0	0.00 0
106 Residential 107 Residential	All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat	Shell Shell	ENERGY STAR Windows Window Film - Single Pane	Energy Star Southern Climate Zone Windows (U = 0.4, SHGC = 0.25) - D Window Film - SHG < 0.50	sqft sqft	RET	20.0 10.0	20 10	\$16.2 \$4.2	3 2	0.00	0 0	0.00 0 0.10 0
108 Residential 109 Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance F Heat Pump	Shell	Window Film - Single Pane Window Film - Single Pane	Window Film - SHG <0.50 Window Film - SHG <0.50	sqft sqft	RET RET	10.0 10.0	10 10	\$0.0 \$0.7	0 1	0.00 (0 0	0.00 0 0.00 0
110 Residential 111 Residential	All Not Multifamily All Not Multifamily	AC/Gas Heat AC/Electric Resistance H		Window Film - Double Pane Window Film - Double Pane Window Film - Double Pane	Window Film - SHG <0.50	sqft sqft	RET RET	10.0 10.0	10 10 10	\$1.4 \$0.0	0	0.00	0	0.03 0 0.00 0
112 Residential 113 Residential 114 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat AC/Electric Resistance H	Shell Shell	Window Film - Double Pane Attic Encapsulation_R19 Attic Encapsulation_R19	R-19	sqft sqft sqft	RET RET RET	10.0 25.0 25.0	10 25 25	\$0.2 \$0.6 \$0.6	0	0.00 0 0.00 0 0.00 0	0	0.00 0 0.00 0 0.00 0
114 Residential 115 Residential 116 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump AC/Gas Heat	Shell Shell	Attic Encapsulation_R19 Attic Encapsulation_R19 Attic Encapsulation_R38	R-19	sqft sqft	RET RET	25.0 25.0 25.0	25 25 25	\$0.6 \$0.6 \$1.2	1	0.00	0	0.00 0 0.00 0
117 Residential 118 Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance F Heat Pump		Attic Encapsulation R38 Attic Encapsulation R38	R-38	sqft sqft	RET RET	25.0 25.0 25.0	25 25 25	\$1.2 \$1.2	2	0.00	0	0.00 0 0.00 0
119 Residential 120 Residential	All Not Multifamily All Not Multifamily	AC/Gas Heat AC/Electric Resistance H	Shell Shell	Solar Screens Solar Screens	Solar Screens Solar Screens	sqft sqft	RET RET	10.0 10.0	10 10	\$8.3 \$8.3	4 0	0.00	0 0	0.00 0 0.00 0
121 Residential 122 Residential	All Not Multifamily All Not Multifamily	Heat Pump Gas Heating	Shell Lighting	Solar Screens Linear Fluorescents	25 W Indoor Linear Fluorescents	sqft amp	RET ROB	10.0 7.5	10 15	\$8.3 \$6.6	1 17	0.00 (0.00 (0	0.00 0 0.17 0
123 Residential 124 Residential	All Not Multifamily All Not Multifamily All Not Multifamily	AC/Electric Resistance H Heat Pump	Lighting Lighting Lighting	Linear Fluorescents Linear Fluorescents	25 W Indoor Linear Fluorescents	amp amp	ROB ROB	7.5 7.5	15 15	\$6.6 \$6.6	13 15	0.00 (0 0	0.00 0 0.00 0
125 Residential	All INOL INIDITIIAMILY	Gas Heating	Legitury	Linear Fluorescents	25 W Outdoor Linear Fluorescents	amp	ROB	7.5	15	\$6.6	1/	0.00	η υ	0.17 0

Measure ID	Sector	Sub-Sector	Building Type	End Use	MEASURE DESCRIPTION Measure Name	Efficient Measure Definition	Measure Unit Name	Retrofit (RET), Replace-on- Burnout (ROB), or New Construction (NEW)	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost	Annual kWh Savings	Annual kW Coincident Peak Savings (Then	Gas Annu gs Incr	al kWh eases Peak Increas	t Therms
126 127	Residential Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance H Heat Pump	Lighting Lighting	Linear Fluorescents Linear Fluorescents	25 W Outdoor Linear Fluorescents	amp amp	ROB ROB	7.5 7.5	15 15	\$6.6 \$6.6	1:	3 0.00 5 0.00	0		0.00 0
	Residential Residential	All Not Multifamily All Not Multifamily		Hot Water Hot Water	Low-Flow Showerheads Water Heater Replacement—Solar Water Heating	3.0 EF Solar Hot Water Heater	showerhead neater	RET RET	10.0 15.0	10 15	\$7.0 \$915.0	16i 2,26		0	0 0	0.00 0
131	Residential Residential	All Not Multifamily All Not Multifamily	All	Lighting Shell	Occupancy Sensor - Wall-Mounted Attic Access Covers	Attic Access Covers	Per Wall Sensor Per Home	ROB RET	10.0 20.0	10 20	\$25.0 \$80.0	78		0	0 0	0.00 0
133	Residential Residential	All Not Multifamily All Not Multifamily	AC/Electric Resistance H		Heat Pump Water Heater (0.23 UEF)(Elec Resist - Conditioned Space)	Heat Pump Water Heater (0.23 UEF)(Gas Heat - Conditioned Space) Heat Pump Water Heater (0.23 UEF)(Elec Resist - Conditioned Space)	Per Unit	ROB ROB	13.0 13.0	13 13	\$850.0 \$850.0	1,98 1,42	4 0.24	0	0 0	0.00 0
135	Residential Residential Residential	All Not Multifamily All Not Multifamily All Not Multifamily	All	Hot Water Hot Water HVAC			Per Unit Per Unit Per Thermostat	ROB ROB	13.0 13.0	13	\$850.0 \$850.0 \$125.0	1,74 1,82 64	5 0.20	0	0 0	0.00 0 0.00 0
	Residential Residential	All Not Multifamily All Not Multifamily All Not Multifamily	AC/Gas Heat	HVAC	Programmable Communicating Thermostat Programmable Communicating Thermostat Advanced Power Strips	Smart Thermostats	Per Thermostat Per Strip	ROB ROB	7.5 7.5 10.0	8	\$125.0 \$125.0 \$17.0	10	B 0.00	4	0 0	0.00 0
139	Residential Residential	All Not Multifamily All Not Multifamily	Heat Pump	HVAC HVAC	Advanced Power Strips Ductless Heat Pump Central Air Conditioner Tune-Up	SEER 21.17; HSPF 10.43	Per strip Per home Per Home	ROB ROB RET	18.0 10.0	18 10	\$1,757.8 \$1,757.0	2,09	4 0.13	0	0 0	0.00 0
141	Residential Residential	All Not Multifamily All Not Multifamily All Not Multifamily	Heat Pump	HVAC Other	Central Heat Pump Tune-Up Home Energy Reports	System functioning at the manufacture specified EER	Per Home per home	RET RET	10.0	10	\$175.0 \$0.0	1,24	3 0.30	0	0 0	0.00 0 0.00 0
143	Residential Residential	All Not Multifamily All Not Multifamily	All	HVAC HVAC	ECM Fan Motors ECM Fan Motors	ECM Fan Motor	Per Unit Per Unit	RET ROB	15.0	15 15	\$197.0 \$97.0	20	0.00	0	0 0	0.00 0
145	Residential Residential	All Not Multifamily Low Income All	All	HVAC Other	Aeroseal Duct Sealing Home Energy Reports	Aeroseal Duct Sealing on duct system	Per Home per home	RET RET	10.0	10	\$2,400.0 \$0.0	1,58	9 0.74 4 0.02	0	0 0	0.00 0
	Residential Residential	Multifamily Common Area Multifamily Common Area	All	Appliances Appliances	Ice Machine - CEE Tier II Vending Machine Controls - non-refrigerated	Ice Machine - CEE Tier II Vending Machine Controls - non-refrigerated	Per Machine Per Machine	ROB ROB	10 5	10 5	\$909.0 \$141.0	92° 38°	7 0.01	0	0 0	0.00 0
150	Residential Residential	Multifamily Common Area Multifamily Common Area	Heat Pump	Appliances HVAC	Vending Machine Controls - refrigerated ASHP - SEER 15-15.99 - Min HSPF=8.6	ASHP - SEER 15-15.99 - Min HSPF=8.6	Per Machine per 3 ton unit	ROB ROB	5 19	5 19	\$141.0 \$1,028.0	1,34 1,55	9 0.36	0	0 0	0.00 0
152	Residential Residential	Multifamily Common Area Multifamily Common Area	AC	HVAC HVAC	ASHP - SEER 16-16.99 - Min HSPF=8.6 CAC - SEER 15-15.99	CAC - SEER 15-15.99	per 3 ton unit per 3 ton unit	ROB ROB	19 19	19 19	\$1,806.0 \$1,540.0	4,25 1,08	7 0.56	0	0 0	0.00 0
154	Residential Residential	Multifamily Common Area Multifamily Common Area Multifamily Common Area	All	HVAC Lighting	CAC - SEER 16-16.99 Occupancy Sensor - Ceiling/Wall Mount Occupancy Sensor - Fixture Mounted	Occupancy Sensor - Ceiling/Wall Mount	Per Sensor	ROB ROB	19 8	19 8	\$2,310.0 \$155.9	1,28	5 0.63 7 0.23	0	0 0	0.00 0
156	Residential Residential Residential	Multifamily Common Area Multifamily Common Area Multifamily Common Area	All	Lighting Lighting	Exterior LED Parking Lot Gas Canopy, Area, Flood, Wallpack or retrofit kit(repl 150w and low Exterior LED Parking Lot Gas Canopy, Area, Flood, Wallpack or retrofit kit(repl 151-250w)	Exterior LED Parking Lot Gas Canopy, Area, Flood, Wallpack or retrofit k		ROB ROB	15 15	15 15	\$155.9 \$198.0 \$189.0	25: 45i 86i	0.10	0	0 0	0.00 0 0.00 0
	Residential Residential	Multifamily Common Area Multifamily Common Area Multifamily Common Area	All	Lighting Lighting Lighting	Exterior LED Parking Lot Gas Canopy, Area, Flood, Wallpack or retrofit kit(repl 151-250w) Exterior LED Parking Lot Gas Canopy, Area, Flood, Wallpack or retrofit kit(repl 451w-400w) Exterior LED Parking Lot Gas Canopy, Area, Flood, Wallpack or retrofit kit(repl 401w and high	Exterior LED Parking Lot Gas Canopy, Area, Flood, Wallpack or retrofit k	Per Kit	ROB ROB	15 15	15 15 15	\$437.0 \$585.0	1,30 3,38	5 0.27	0	0 0	0.00 0
160	Residential Residential	Multifamily Common Area Multifamily Common Area	All	Lighting Lighting	LED Exit Signs Delamping T12 or T8 sys w HPT8, RWT8, T5 or T5HO Lp & Bal removing 2 lamps	LED Exit Signs Delamping T12 or T8 sys w HPT8, RWT8, T5 or T5HO Lp & Bal removing	Per Sign Per 2 lamps	ROB ROB	15 11	15 11	\$52.5 \$28.0	25 41	1 0.03	0	0 0	0.00 0 0.00 0
	Residential Residential	Multifamily Common Area Multifamily Common Area	All	Lighting Lighting	Delamping T12 or T8 sys w HPT8, RWT8, T5 or T5HO Lp & Bal removing 1 lamps Interior LED Recessed, Surface, Track, Pendant downlight fixtures, or retrofit kits	Delamping T12 or T8 sys w HPT8, RWT8, T5 or T5HO Lp & Bal removin Interior LED Recessed, Surface, Track, Pendant downlight fixtures, or ret	Per lamp Per Fixture	ROB ROB	11 15	11 15	\$14.0 \$27.0	20 28	B 0.07	0	0 0	0.00 0
165	Residential Residential	Multifamily Common Area Multifamily Common Area	All	Lighting Lighting	Interior LED Troffer, Panel fixtures or retrofit kits (replacing a 2L fixture) Interior LED Troffer, Panel fixtures or retrofit kits (replacing a 3-4L fixture)	Interior LED Troffer, Panel fixtures or retrofit kits (replacing a 2L fixture) Interior LED Troffer, Panel fixtures or retrofit kits (replacing a 3-4L fixture)	Per Fixture	ROB ROB	15 15	15 15	\$101.0 \$125.0	19i 34i	8 0.04 8 0.07	0	0 0	0.00 0
167	Residential Residential	Multifamily Common Area Multifamily Common Area	All	Lighting Lighting	LED Linear Tube Replacement/Retrofits (one for one lamp replacement) LED screw-in lamps, MR lamps & retrofit trim kits New HPT8, RWT8, T5 or T5HO fixture		Per lamp	ROB ROB	15 15	15 15	\$10.0 \$10.0	12: 23: 20:	3 0.04	0	0 0	0.00 0
169	Residential Residential Residential	Multifamily Common Area Multifamily Common Area Multifamily Common Area	All	Consumer Electronics HVAC	New HP18, KW18, 15 or 15HO fixture Smart Power Strips Electronically Commutated Motor (ECM)	Smart Power Strips	Per Fixture Per Strip Per Motor	ROB ROB	15 10	15 10	\$100.0 \$40.0 \$168.0	20: 5: 20:	7 0.00	0	0 0	0.00 0 0.00 0 0.00 0
171	Residential Residential	Multifamily Common Area Multifamily Common Area Multifamily Common Area	All	Other Shell	VFD Pool Pumps, ENERGY STAR ENERGY STAR Windows/Doors	VFD Pool Pumps, ENERGY STAR	Per 2.5 HP Pump Per saft	ROB ROB	10	10 10	\$425.0 \$5.4	1,42		0	0 0	0.00 0
	Residential Residential	Multifamily Common Area Multifamily Common Area	Electric Water Heater	Hot Water Hot Water	1.5 GPM Showerhead Faucet Aerator (Electric)	1.5 GPM Showerhead	Per Showerhead Per Aerator	ROB ROB	10	10	\$34.2 \$14.0	279	9 0.03	0	0 0	0.00 0
	Residential Residential	Multifamily Common Area Multifamily Common Area	AC	HVAC HVAC	Air Conditioning Tune-Ups	Air Conditioning Tune-Ups	Per Tune-Up Per Tune-Up	ROB ROB	5	5	\$175.0 \$200.0	1,10 1,50	0.35	0	0 0	0.00 0
177	Residential Residential	All Not Multifamily All Not Multifamily	All	Shell Shell	Air Sealing		Participants Square Feet	RET RET	13 20	13 20	\$190.1 \$1.0	28		7	0 0	0.00 0
	Residential Residential	All Not Multifamily All Not Multifamily	All Electric Resistance Heati	Shell HVAC	Reflective Roof Coating Split ASHP - SEER 15 - Retrofit from Electric Resistance Heat	Reflective Roof Coating ASHP SEER 15	Square Feet Per 3 Ton Unit	RET RET	10 18	10 18	\$0.1 \$2,390.6	10,09	1 0.00 8 0.72	0	0 0	0.00 0
	Residential Residential	All Not Multifamily All Not Multifamily	Electric Resistance Heati Electric Resistance Heati	HVAC HVAC	Split ASHP - SEER 16 - Retrofit from Electric Resistance Heat Split ASHP - SEER 17 - Retrofit from Electric Resistance Heat	ASHP SEER 17	Per 3 Ton Unit Per 3 Ton Unit	RET RET	18 18	18 18	\$2,824.7 \$3,362.2	10,45 10,73		0	0 0	0.00 0
184	Residential Residential	All Not Multifamily All Not Multifamily	Electric Resistance Heati Electric Resistance Heati Electric Resistance Heati	HVAC	Split ASHP - SEER 18 - Retrofit from Electric Resistance Heat Split ASHP - SEER 19 - Retrofit from Electric Resistance Heat Split ASHP - SEER 20 - Retrofit from Electric Resistance Heat	ASHP SEER 19	Per 3 Ton Unit Per 3 Ton Unit Per 3 Ton Unit	RET RET RET	18 18	18 18	\$3,886.2 \$4,411.6 \$4,935.6	10,83 11,00 11,26	0 1.37	0	0 0	0.00 0
	Residential Residential Residential	All Not Multifamily All Not Multifamily Multifamily	Electric Resistance Heati Electric Resistance Heati Electric Resistance Heati	HVAC		ASHP SEER 21	Per 3 Ton Unit Per 3 Ton Unit	RET RET	18 18	18 18 18	\$5,459.5 \$2,390.6	11,29 11,29 10,09	9 1.79	0	0 0	0.00 0 0.00 0 0.00 0
188	Residential Residential	Multifamily Multifamily	Electric Resistance Heati Electric Resistance Heati Electric Resistance Heati	HVAC	Split ASHP - SEER 16 - Retrofit from Electric Resistance Heat Split ASHP - SEER 17 - Retrofit from Electric Resistance Heat	ASHP SEER 16	Per 3 Ton Unit	RET RET	18	18	\$2,824.7 \$3,362.2	10,45 10,73	7 0.83	0	0 0	0.00 0
190 I	Residential Residential	Multifamily Multifamily	Electric Resistance Heati Electric Resistance Heati	HVAC	Split ASHP - SEER 18 - Retrofit from Electric Resistance Heat Split ASHP - SEER 19 - Retrofit from Electric Resistance Heat	ASHP SEER 18	Per 3 Ton Unit Per 3 Ton Unit	RET RET	18	18	\$3,886.2 \$4,411.6	10,83 11,00	7 1.24	0	0 0	0.00 0
193	Residential Residential	Multifamily Multifamily	Electric Resistance Heati Electric Resistance Heati	HVAC HVAC	Split ASHP - SEER 20 - Retrofit from Electric Resistance Heat Split ASHP - SEER 21 - Retrofit from Electric Resistance Heat	ASHP SEER 20 ASHP SEER 21	Per 3 Ton Unit Per 3 Ton Unit	RET RET	18 18	18 18	\$4,935.6 \$5,459.5	11,26 11,29	9 1.79	0	0 0	0.00 0
195	Residential Residential	Multifamily Multifamily	Heat Pump	HVAC HVAC	Packaged ASHP	SEER 16	per 3 ton unit per 3 ton unit	ROB ROB	18 18	18 18	\$524.0 \$1,047.9	90 1,14	0.83	0	0 0	0.00 0
197	Residential Residential	Multifamily Multifamily	Heat Pump	HVAC HVAC HVAC		SEER 16	per 3 ton unit	ROB ROB ROB	18 18	18 18	\$289.9 \$555.7	80	0.58	0	0 0	0.00 0
199	Residential Residential Residential	Multifamily Multifamily Multifamily	AC	HVAC HVAC	Packaged A/C Packaged A/C Split ASHP	SEER 16	per 3 ton unit per 3 ton unit per 3 ton unit	ROB ROB	18	18 18	\$425.8 \$713.1 \$524.0	46 85	9 0.25 4 0.39 9 0.72	0	0 0	0.00 0 0.00 0 0.00 0
	Residential Residential	Multifamily Multifamily	Heat Pump	HVAC HVAC	Split ASHP	SEER 16	per 3 ton unit per 3 ton unit	ROB ROB	18	18	\$1,047.9 \$1,571.9	1,14	7 0.83	0	0 0	0.00
	Residential Residential	Multifamily	Heat Pump	HVAC HVAC	Split ASHP	SEER 18	per 3 ton unit	ROB ROB	18	18	\$2,095.8 \$2,619.8	1,52 1,62	1 1.24	0		0.00 0
	Residential Residential	Multifamily Multifamily	Heat Pump	HVAC HVAC		SEER 21	per 3 ton unit per 3 ton unit	ROB ROB	18 18	18 18	\$3,143.7 \$3,667.7	1,55- 2,14	1 1.79	0	0 0	0.00 0
208	Residential Residential	Multifamily	Heat Pump	HVAC HVAC	Split ASHP	SEER 23	per 1 ton unit per 1 ton unit	ROB ROB	18 18	18 18	\$1,397.2 \$1,571.9	69 66	9 0.57	0	0 0	0.00 0
210	Residential Residential		Heat Pump	HVAC HVAC	Spit ASHP Spit ASHP	SEER 26	per 1 ton unit	ROB ROB	18 18	18 18	\$1,921.2 \$2,095.8	69 71:	9 0.59	0	0 0	0.00 0
212	Residential	Multifamily	Heat Pump	HVAC HVAC HVAC	Split ASHP	SEER 30	per 1 ton unit	ROB ROB	18 18 18	18 18 18	\$2,270.5 \$2,794.4 \$3,206.6	1,50 1,40 1,59	3 0.59	0	0 0	0.00 0 0.00 0
214	Residential Residential	Multifamily Multifamily Multifamily	Heat Pump			SEER 15	per 1 ton unit per 3 ton unit per 3 ton unit	ROB ROB	18 18 18	18 18 18	\$3,206.6 \$289.9 \$555.7	1,59 57 1,29	0.44	0	0 0	0.00 0 0.00 0
216	Residential Residential	Multifamily Multifamily	Heat Pump Heat Pump	HVAC HVAC	Split DFHP Solit DFHP	SEER 17 SEER 18	per 3 ton unit per 3 ton unit	ROB ROB	18 18	18 18	\$833.6 \$1,189.1	1,39 1,19	1.09	0	0 0	0.00 0 0.00 0
219	Residential Residential	Multifamily Multifamily	Heat Pump Heat Pump	HVAC	Split DFHP Split DFHP	SEER 19 SEER 20	per 3 ton unit per 3 ton unit	ROB ROB	18 18	18 18	\$1,546.1 \$1,903.1	2,38 2,53	4 2.04	0	0 0	0.00 0
221	Residential Residential	Multifamily Multifamily	AC AC	HVAC HVAC	Split A/C Split A/C	Seer 15 Seer 16	per 3 ton unit	ROB ROB	18 18	18 18	\$425.8 \$713.1	33 48	4 0.28 4 0.40	0	0 0	0.00 0
223	Residential Residential	Multifamily Multifamily Multifamily	AC	HVAC HVAC HVAC	Split A/C Split A/C	Seer 18	per 3 ton unit	ROB ROB ROB	18 18	18 18	\$999.8 \$1,286.5 \$1,574.6	56 60- 70	4 0.49	0	0 0	0.00 0 0.00 0 0.00 0
225	Residential Residential Residential	Multifamily Multifamily Multifamily	AC	HVAC HVAC	Split A/C Split A/C Split A/C	Seer 20	per 3 ton unit per 3 ton unit per 3 ton unit	ROB ROB ROB	18 18 18	18 18 18	\$1,574.6 \$1,861.3 \$2,148.0	70 91 88	0.70	0	0 0	0.00 0 0.00 0 0.00 0
	Residential Residential	Multifamily Multifamily	AC	HVAC HVAC	Spirt ArC Duct Work Replacement AC Duct Insulation AC	Duct Work Replacement	per system per system	RET RET	20 20	20 20	\$2,148.0 \$202.4 \$673.3	1,04		25 9	0 0	0.00 0
	Residential Residential	Multifamily Multifamily	AC	HVAC HVAC		Duct Sealing	per system per system	RET RET	18 18	18 18	\$554.0 \$519.6	70 1,10	6 0.33	17	0 0	0.00 0 0.00 0
231	Residential Residential	Multifamily Multifamily	Heat Pump	HVAC HVAC	Duct Work Replacement HP	Duct Work Replacement	per system per system	RET RET	20 20	20 20	\$174.1 \$672.6	1,84 76	1 0.48 1 0.17	0	0 0	0.00 0 0.00 0
234	Residential	Multifamily Multifamily	All	Appliances Appliances	Freezer Recycling	Refrigerator Recycling Freezer Recycling	efrigerator reezer	RET RET	9	9	\$50.0 \$50.0	1,02 68	8 0.12 0 0.08	0	0 0	0.00 0
236		Multifamily Multifamily	Electric Water Heater	Lighting Hot Water	10 LEDs DI Faucet Aerators	Low Flow Faucet Aerators	per unit per aerator	RET RET	5	5	\$111.7 \$2.0	570 221		0	0 0	0.00 0
238	Residential Residential Residential	Low Income All Multifamily Multifamily	Gas Heating	Lighting Lighting	LED Lighting Misc Linear Fluorescents Linear Fluorescents	25 W Indoor Linear Fluorescents	oer bulb amp	RET ROB ROB	7.5 7.5	19 15 15	\$11.2 \$6.6 \$6.6	5	7 0.01 7 0.00 3 0.00	0	0 0	0.00 0 0.17 0 0.00 0
240	Residential Residential	Multifamily Multifamily Multifamily	Heat Pump	Lighting Lighting Lighting	Linear Fluorescents	25 W Indoor Linear Fluorescents	amp amp amp	ROB ROB	7.5 7.5	15 15 15	\$6.6 \$6.6 \$6.6	1:	0.00	0	0 0	0.00 0 0.00 0
242	Residential Residential	Multifamily Multifamily	AC/Electric Resistance H	Lighting Lighting	Linear Fluorescents	25 W Outdoor Linear Fluorescents	amp amp	ROB ROB	7.5 7.5 7.5	15 15	\$6.6 \$6.6	1:	0.00	0	0 0	0.00 0
244	Residential Residential	Multifamily Multifamily	All	Hot Water Hot Water	Low-Flow Showerheads Water Heater Replacement—Solar Water Heating	1.75 GPM Showerhead 3.0 EF Solar Hot Water Heater	showerhead neater	RET RET	10 15	10 15	\$7.0 \$915.0	16 2,26	0.02	0	0 0	0.00 0
247	Residential Residential	Multifamily Multifamily	All Gas Heat (No AC)	Lighting Hot Water	Occupancy Sensor - Wall-Mounted Heat Pump Water Heater (0.23 UEF)(Gas Heat - Conditioned Space)	Occupancy Sensor - Wall-Mounted Heat Pump Water Heater (0.23 UEF)(Gas Heat - Conditioned Space)		ROB ROB	10 13	10 13	\$25.0 \$850.0	1,98	8 0.00 5 0.24	0	0 0	0.00 0
248	Residential Residential	Multifamily Multifamily	AC/Electric Resistance H Heat Pump	Hot Water Hot Water	Heat Pump Water Heater (0.23 UEF)(Elec Resist - Conditioned Space) Heat Pump Water Heater (0.23 UEF)(Heat Pump - Conditioned Space)	Heat Pump Water Heater (0.23 UEF)(Elec Resist - Conditioned Space) Heat Pump Water Heater (0.23 UEF)(Heat Pump - Conditioned Space)		ROB ROB	13	13 13	\$850.0 \$850.0	1,42		0		0.00 0

					MEASURE DESCRIPTION								MEASURE INC	REMENTAL SAV	INGS PER UNIT		
Measure ID	Sector	Sub-Sector	Building Type	End Use	Measure Name	Efficient Measure Definition	Measure Unit Name	Retrofit (RET), Replace-on- Burnout (ROB), or New Construction (NEW)	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost	Annual kWh Savings	Annual kW Coincident Peak Savings	Annual Gas Savings (Therms)	Annual kWh Increases	Annual kW Coincident Peak Increases	Annual Gas Therms Increase
251	Residential	Multifamily	Heat Pump	HVAC	Programmable Communicating Thermostat	Smart Thermostats	Per Thermostat	ROB	7.5	7.5	\$125.0	108	0.03	(0	0.00	0
252	Residential	Multifamily	AC/Gas Heat	HVAC	Programmable Communicating Thermostat	Smart Thermostats	Per Thermostat	ROB	7.5	7.5	\$125.0	19	0.00	4	0	0.00	0
253	Residential	Multifamily	All	Consumer Electronics	Advanced Power Strips	Advanced Smart-Strip	Per strip	ROB	10	5	\$17.0	103	0.01	(0	0.00	0
254	Residential	Multifamily	Heat Pump	HVAC	Ductless Heat Pump	SEER 21.17; HSPF 10.43	Per home	ROB	18	18	\$1,757.8	2,094	0.13	(0	0.00	0
255	Residential	Multifamily	AC	HVAC	Central Air Conditioner Tune-Up	System functioning at the manufacture specified EER	Per Home	RET	10	10	\$175.0	855	0.30	(0	0.00	0
256	Residential	Multifamily	Heat Pump	HVAC	Central Heat Pump Tune-Up	System functioning at the manufacture specified EER	Per Home	RET	10	10	\$175.0	1,243	0.30	(0	0.00	0
257	Residential	Multifamily	All	Other	Home Energy Reports	Receiving Home Energy Reports	per home	RET	1	1	\$0.0	64	0.02	(0	0.00	0
258	Residential	Multifamily	All	HVAC	Aeroseal Duct Sealing	Aeroseal Duct Sealing on duct system	Per Home	RET	10	10	\$2,400.0	1,589	0.74	(0	0.00	0
259	Residential	All Not Multifamily	Electric Water Heater	Hot Water	Low-Flow Showerheads	1.75 GPM Showerhead	showerhead	ROB	10	10	\$7.0	166		(0	0.00	0
260	Residential	Multifamily		Hot Water	Low-Flow Showerheads	1.75 GPM Showerhead	showerhead	ROB	10	10	\$7.0	166	0.02	(0	0.00	0
261	Residential	All Not Multifamily	Electric Water Heater	Hot Water	Faucet Aerators	Low Flow Faucet Aerators	per aerator	ROB	5	5	\$2.0	225	0.01	(0	0.00	0
262	Residential	Multifamily	Electric Water Heater	Hot Water	Faucet Aerators	Low Flow Faucet Aerators	per aerator	ROB	5	5	\$2.0	225	0.01	(0	0.00	0
263	Residential	All Not Multifamily	All	Lighting	Connected LED Lighting	Connected version of 9W LED	per bulb	ROB	15	15	\$11.0	6	0.00	(0	0.00	0
264	Residential	Multifamily	All	Lighting	Connected LED Lighting	Connected version of 9W LED	per bulb	ROB	15	15	\$11.0	6	0.00	(0	0.00	0

Measure	Description	1	Measure Selection		1				Applicability				
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Program-Measure Inclusion (if Passed Measure Screening)	Total Sub-Sector Units	Measure Units per Sub- Sector Unit	Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
1 2	Packaged ASHP Split ASHP - SEER 15	1.20 3.40	1	1	50,427 50,427	7 1.0 7 1.0	48% 48%		100% 100%			6% 6%	664 681
3	Packaged ASHP	2.00	1	1	395,280	1.0	48%	100%	100%	8%	61%	6%	508
4	Packaged ASHP Packaged DFHP	1.15 2.95	1	1	395,280 395,280	1.0	48% 48%		100% 100%	7%		6% 6%	476 523
6	Packaged DFHP	1.54	1	1	395,280	1.0	48%		100%	8%		6%	515
7 8	Packaged A/C	0.81 0.75	0	0									
9	Packaged A/C Split ASHP	1.89	1	1	395,280	1.0	48%	100%	100%	8%	61%	6%	508
10 11	Split ASHP	1.17 1.00	1	1	395,280	1.0	48% 48%	100% 100%	100%	7%	61%	6% 6%	476 451
12	Split ASHP Split ASHP	0.85	0	0	395,280	1.0	46%	100%	100%	170	61%	0%	451
13	Split ASHP	0.74	0	0									
14 15	Split ASHP Split ASHP	0.60 0.70	0	0									
16	Split ASHP	0.60	0	0									
17 18	Split ASHP Split ASHP	0.52 0.43	0	0									
19	Split ASHP	0.41	0	0									
20 21	Split ASHP Split ASHP	0.49 0.42	0	0									
22	Split ASHP	0.32	0	0									
23 24	Split DFHP Split DFHP	2.17 2.54	1	1	395,280 395,280	1.0	48% 48%		100% 100%	8%		6% 6%	523 518
25	Split DFHP	1.92	1	1	395,280	1.0	48%	100%	100%	8%	61%	6%	499
26 27	Split DFHP Split DFHP	1.21 1.82	1	1	395,280 395,280	1.0	48% 48%		100% 100%			6% 6%	475 484
27 28	Split DFHP	1.58	1	1	395,280	1.0	48%	100%	100%	7%	61%	6%	473
29 30	Split A/C Split A/C	0.91 0.80	0	1	395,280 395,280	1.5	90% 90%	100%	100% 100%	52%	88%	6% 6%	13,495 12,593
30 31	Split A/C Split A/C	0.80	0	0	395,280	1.5	90%	100%	100%	48%	88%	6%	12,593
32	Split A/C	0.54	0	0									
33 34	Split A/C Split A/C	0.52 0.56	0	0									
35	Split A/C	0.47	0	0									
36 37	Duct Work Replacement A Duct Insulation AC	0.42 0.54	0	0									
38	Duct Sealing AC	1.22	1	1	395,280	1.0	90%					100%	276,379
39 40	Duct Sealing HP Duct Work Replacement H	1.46 0.52	1 0	0	395,280	1.0	48%	100%	100%	100%	78%	100%	147,402
41	Duct Insulation HP	0.76	0	0									
42 43	Refrigerator Recycling Freezer Recycling	6.99 4.62	1	1	395,280 395,280	1.0	100% 100%			100%	100%	100% 100%	122,537 13.835
44	5 LEDs Kit	3.03	1	1	395,280	1.0	100%	100%	100%	100%	60%	100%	237,168
45	Faucet Aerators	32.25	1	1	395,280	3.0	69% 100%		100%	100%	78%	100%	637,797
46 47	LED Lighting Misc (Low In HVAC Filter	9.09 0.80	0	1	145,144 145,144	20.2	48%	100% 100%	100% 100%	100%	60%	100% 100%	1,759,142 69,669
48 49	HVAC Filter HVAC Filter	0.52 0.28	0	1	145,144 145,144	1.0	31% 2%		100% 100%		100%	100% 100%	44,414 2,467
50	Faucet Aerator	11.86	1	1	145,144	2.0	69%				78%	100%	156,130
51	Pipe Insulation	2.89	1	1	145,144	1.0	69% 100%				78% 83%	100% 100%	78,065
52 53	Advanced Smart-strip Water Heater Blanket	1.28 3.04	1	1	145,144 145,144	1.2	69%		100% 100%		89%	100%	75,173 87,304
54	AC Winterization Kit AC Winterization Kit	5.22	1	1	145,144	1.0	100%		100%	33%	96%	100%	46,459
55 56	AC Winterization Kit AC Winterization Kit	1.91 1.03	1	1	145,144 145,144	1.0	100% 100%		100% 100%	33%	96%	100% 100%	46,459 46,459
57	Water Heater Temperatur	23.97	1	1	145,144	1.0	69%	100%	100%	100%	78%	100%	78,065
58 59	Digital Switch Plate Wall T Air Sealing	0.31 0.96	0	1 1	31,754 31,754	1.0	100% 100%	100% 100%	100% 100%	100%	100%	100% 100%	31,754 12,335
60	Air Sealing	1.28	1	1	31,754	1.0	100%	100%	100%	50%	78%	100%	12,335
61 62	Duct Sealing Attic Plug & Fill Insulation	1.51 1.12	1	1	31,754 31,754	1.0 879.7	100% 100%	100% 100%	100% 100%	100%	78%	100% 100%	24,670 21,701,857
63	Belly Board Repair	1.94	1	1	31,754	1282.0	100%	100%	100%	100%	78%	100%	31,626,468
64 65	Programmable Communic Reflective Roof Coating	4.57 3.28	1 1	1 1	31,754 31,754	1.0 1211.3	100% 100%			100%	87%	100% 100%	27,626 29,881,662
66	Belly Board Insulation	1.88	1	1	31,754	1282.0	100%	100%	100%	100%	78%	100%	31,626,468
67 68	LED Lighting Misc Attic Knee Wall Insulation	9.09	1	1	481,543 395,280	31.2 271.0	100% 31%		100% 100%	100%	60%	100% 100%	9,014,490 5,311,208
69	Attic Knee Wall Insulation	2.71	1	1	395,280	271.0	17%	100%	100%	50%	32%	100%	2,918,449
70 71	Attic Knee Wall Insulation Attic Knee Wall Insulation	2.07 1.48	1	1 1	395,280 395,280	271.0 271.0	48% 31%		100% 100%		32%	100% 100%	8,244,145 5,195,207
72	Attic Knee Wall Insulation	1.81	1	1	395,280	271.0	17%	100%	100%	50%	32%	100%	2,918,449
73 74	Attic Knee Wall Insulation Ceiling Insulation	1.39 0.92	0	1	395,280 395,280	271.0	48% 31%					100% 100%	8,236,507 22,557,385
75	Ceiling Insulation	1.13	1	1	395,280	1147.7	17%	100%	100%	50%	32%	100%	12,402,096
76 77	Ceiling Insulation Ceiling Insulation	0.87 0.76	0	1	395,280 395,280	1147.7	48% 31%					100% 100%	35,153,384 21,933,944
78	Ceiling Insulation	0.93	0	1	395,280	1147.7	17%	100%	100%	50%	32%	100%	12,315,310
79 80	Ceiling Insulation Wall Insulation	0.72 2.24	0	1	395,280 395,280	1147.7	48% 31%					100% 100%	34,636,937 40,303,136
81	Wall Insulation	3.30	1	1	395,280	2046.2	17%	100%	100%	50%	32%	100%	22,164,318
82 83	Wall Insulation Wall Insulation	2.05 1.71	1	1	395,280 395,280	2046.2	48% 31%			50%	32% 32%	100% 100%	62,214,459 39,020,299
83 84	Wall Insulation	2.46	1	1	395,280	2046.2	17%	100%	100%	50%	32%	100%	21,904,257
85 86	Wall Insulation Floor Insulation	1.46 0.08	1	1 0	395,280	2046.2	48%	100%	100%	50%	32%	100%	62,214,459
86	Floor Insulation Floor Insulation	0.08	0	0									
88	Floor Insulation	0.05	0	0									
89 90	Crawlspace Encapsulation Crawlspace Encapsulation	0.19 0.85	0	0	1						1		
91	Crawlspace Encapsulation	0.25	0	0									
92 93	Roof Deck Insulation Roof Deck Insulation	2.10 2.53	1	1 1	395,280 395,280	1794.1	31% 17%		100% 100%	51%		100% 100%	35,483,123 19,319,952
94	Roof Deck Insulation	1.93	1	1	395,280	1794.1	48%	100%	100%	51%	32%	100%	55,142,667
95 96	Roof Deck Insulation Roof Deck Insulation	1.20 1.38	1	1	395,280 395,280	1794.1 1794.1	31% 17%		100% 100%	49%	32%	100% 100%	34,068,705 19,319,952
97	Roof Deck Insulation	1.09	1	1	395,280	1794.1	48%	100%	100%	49%	32%	100%	53,958,241
98 99	Radiant Barriers Radiant Barriers	1.06 1.14	1	1	395,280 395,280	1147.7	31% 17%				32%	100% 100%	44,491,329 24,717,405
100	Radiant Barriers	1.04	1	1	395,280	1147.7	48%					100%	69,790,321
101 102	ENERGY STAR Windows ENERGY STAR Windows		0	0									
102	LITEROT STAR WINDOWS	0.17			1	<u>ı</u>		<u>i </u>	<u> </u>	1	1	<u>ı</u>	

ELECTRONICALLY

FILED

2019

October

 \sim

1:00

PM

1

SCPSC

Docket

#

2019-239-E

Page

95

으

86,26

Measure	Description	ļ	Measure Selection					1	Applicability	1	1		
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Program-Measure Inclusion (if Passed Measure Screening)	Total Sub-Sector Units	Measure Units per Sub- Sector Unit	Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
205	Split ASHP	0.60	0	0									1
206	Split ASHP	0.70	0	0									i .
207	Split ASHP	0.60	0	0									1
208	Split ASHP	0.52	0	0									L
209	Split ASHP	0.43	0	0									
210	Split ASHP	0.41	0	0									
211	Split ASHP Split ASHP	0.49 0.42	0	0									
212 213	Split ASHP	0.42	0	0									
214	Split DFHP	2.17	1	1	86,264	1.0	48%	100%	100%	8%	61%	6%	114
215	Split DFHP	2.54	1		86,264	1.0	48%		100%	8%			113
216	Split DFHP	1.92	1	1	86,264	1.0	48%		100%				109
217	Split DFHP	1.21	1	1	86,264	1.0	48%	100%	100%	7%	61%	6%	104
218	Split DFHP	1.82	1	1	86,264	1.0	48%		100%				
219	Split DFHP	1.58	1	1	86,264	1.0	48%		100%				103
220	Split A/C	0.91	0	1	86,264	1.5	90%		100%				2,945
221	Split A/C	0.80	0	1	86,264	1.5	90%	100%	100%	48%	88%	6%	2,748
222	Split A/C Split A/C	0.66	0	0									
223 224	Split A/C	0.54 0.52	0	0									
225	Split A/C	0.52	0	0									
226	Split A/C	0.36	0	0									
227	Duct Work Replacement A	5.21	1	1	86,264	1.0	90%	100%	100%	100%	78%	100%	60,315
228	Duct Insulation AC	0.54	0	0			****						
229	Duct Sealing AC	1.22	1	1	86,264	1.0	90%	100%	100%	100%	78%	100%	60,315
230	Duct Sealing HP	1.46	1	1	86,264	1.0	48%		100%				32,168
231	Duct Work Replacement H	7.44	1	1	86,264	1.0	48%	100%	100%	100%	78%	100%	32,168
232	Duct Insulation HP	0.76	0	0									
233	Refrigerator Recycling	6.99	11		86,264		100%						
234 235	Freezer Recycling 10 LEDs DI	4.62	1	1 1	86,264 86,264	1.0 1.0	100% 100%		100%				3,019 51,758
236	Faucet Aerators	3.03 32.25	1	1	86,264	2.0	69%		100%				46.397
237	LED Lighting Misc	9.09	1		145,144		100%		100%				2,717,091
238	Linear Fluorescents	3.05	1	1	86,264	4.0	34%		100%		95%		2,898
239	Linear Fluorescents	3.15	1	1	86,264	4.0	17%		100%				1,449
240	Linear Fluorescents	3.27	1	1	86,264	4.0	48%		100%		95%		4,091
241	Linear Fluorescents	2.79	1	1	86,264	4.0	34%		100%		100%	7%	-
242	Linear Fluorescents	2.85	1	1	86,264	4.0	17%		100%				
243	Linear Fluorescents	2.98	1	11	86,264		48%		100%				
244 245	Low-Flow Showerheads Water Heater Replacement	52.62 1.33	1	1 1	86,264 86,264	1.0 1.0	100% 69%	100% 100%	100%			100%	67,017 61,472
245	Occupancy Sensor - Wall-		0	0	00,204	1.0	09%	100%	100%	100%	100%	100%	01,472
247	Heat Pump Water Heater	1.04	1	1	86,264	1.0	3%	100%	100%	100%	99%	8%	230
248	Heat Pump Water Heater	0.80	0	1	86,264	1.0	17%		100%				
249	Heat Pump Water Heater	0.94	0	1	86,264	1.0	48%	100%	100%	100%	99%	8%	3,248
250	Heat Pump Water Heater	0.94	0	1	86,264	1.0			100%				
251	Programmable Communic	0.29	0	1	86,264	1.0	48%		100%		87%		4,803
252	Programmable Communic	0.12	0	11	86,264	1.0	31%		100%		87%		3,062
253	Advanced Power Strips	1.28	1	1	86,264	1.3	100%	61%	100%	100%	80%	20%	11,029
254 255	Ductless Heat Pump	0.62	0	<u>0</u>	86.264	1.2	90%	100%	100%	100%	100%	100%	90.059
255 256	Central Air Conditioner Tu Central Heat Pump Tune-	2.47 3.15	1	1	86,264 86,264	1.2 1.0	90%		100%		100%	100%	90,059
257	Home Energy Reports	10,468.03	1	1	86,264	1.0	100%		100%				84,538
258	Aeroseal Duct Sealing	0.38	0	0	30,204	1.0	10076	10076	100%	10076	9070	100 /8	04,000
259	Low-Flow Showerheads	52.62	1	1	395,280	1.9	69%	100%	100%	100%	78%	10%	39,331
260	Low-Flow Showerheads	52.62	1	1	86,264	1.9	69%	100%	100%	100%	78%	10%	8,583
261	Faucet Aerators	32.25	1	1	395,280	2.0	69%		100%				85,040
262	Faucet Aerators	32.25	1	1	86,264	2.0	69%		100%		78%		9,279
263	Connected LED Lighting	0.22	0	1	395,280	31.2	100%		100%	100%			493,309
264	Connected LED Lighting	0.22	0	1	86,264	31.2	100%	100%	100%	100%	60%	7%	107,657

1					MEASURE DESCRIPTION							MEASURE INCR	EMENTAL SAV	INGS PER U	JNIT	
Measure							Retrofit (RET), Replace-on-	Baseline Unit	Efficient Unit	Total	Annual kWh	Annual kW	Annual Gas	nnual kWh	Annual kW	Annual Gas
ID	Sector	Sub-Sector	Building Type	End Use	Measure Name	Measure Unit Name		Lifetime	Lifetime	Incremental	Savings	Coincident	Savings	Increases	Coincident Peak	Therms
	Non Decidential	Court Comments	D-t-II/Oi	Envelope	Cool Poorfe		Construction (NEW)	(Years)	(Years)	Cost		Peak Savings	(Therms)		Increases	Increase
1 2	Non-Residential Non-Residential	Small Commercial Large Commercial		Envelope Envelope	Cool Roofs Cool Roofs	per sq. ft. per sq. ft.	RET RET	15.0 15.0	15.0 15.0	\$1.5 \$1.5	0	0.00	0	0	0.00	
3	Non-Residential	Large Commercial	Retail/Service Restaurant	Envelope	Cool Roofs	per sq. rt. per sq. ft.	RET	15.0	15.0	\$1.5 \$1.5	0	0.00	0	0	0.00	
4	Non-Residential	All		Envelope	Cool Roofs	per sq. rt. per sq. ft.	RET	15.0	15.0	\$1.5	0	0.00	0	0	0.00	
5	Non-Residential			Envelope	Cool Roofs	per sq. ft.	RET	15.0	15.0	\$1.5	0	0.00	o o	0	0.00	
6	Non-Residential		Office	Envelope	Cool Roofs	per sq. ft.	RET	15.0	15.0	\$1.5	ő	0.00	0	0	0.00	
7	Non-Residential			Envelope	Cool Roofs	per sq. ft.	RET	15.0	15.0	\$1.5	0	0.00	0	0	0.00	
8	Non-Residential			Envelope	Commercial Door Air Infiltration-1/8 inches	per linear foot	RET	11.0	11.0	\$9.5	10	0.00	1	0	0.00	
9	Non-Residential	Large Commercial		Envelope	Commercial Door Air Infiltration-1/4 inches	per linear foot	RET	11.0	11.0	\$9.5	19	0.00	2	0	0.00	0
10	Non-Residential	Large Commercial	All	Envelope	Commercial Door Air Infiltration-1/2 inches	per linear foot	RET	11.0	11.0	\$9.5	39	0.01	4	0	0.00	0
11	Non-Residential	Large Commercial	All	Envelope	Commercial Door Air Infiltration-3/4 inches	per linear foot	RET	11.0	11.0	\$9.5	58	0.01	6	0	0.00	0
12	Non-Residential	Small Commercial	All	Envelope	Air Infiltration Improvements	per CFM	RET	11.0	11.0	\$1.1	0	0.00	0	0	0.00	0
13				Envelope	Roof Deck Insulation	per sq. ft.	RET	20.0	20.0	\$1.4	0	0.00	0	0	0.00	
14			General Commercial		Wall Insulation	per sq. ft.	RET	20.0	20.0	\$0.5	1	0.00	0	0	0.00	
15			General Commercial	Envelope	Window Awnings for East Facing Windows	per linear foot	RET	10.0	10.0	\$106.9	4	0.00	0	0	0.00	
16				Envelope	Window Film for East Facing Windows	per sq. ft.	RET	10.0	10.0	\$1.5	4	0.00	0	0	0.00	
17				Envelope	Window Awnings for West Facing Windows	per linear foot	RET	10.0	10.0	\$106.9	4	0.00	0	0	0.00	
18		Small Commercial		Envelope	Window Film for West Facing Windows	per sq. ft.	RET	10.0	10.0	\$1.5	4	0.00	0	0	0.00	
19	Non-Residential	All	w/ Food Service	Food Service Equipment	High-Efficiency Electric Combination Oven	per oven	ROB	12.0	12.0	\$1,333.0	18432	4.20	0	0	0.00	
20	Non-Residential		w/ Food Service	Food Service Equipment	High-Efficiency Electric Convection Oven	per oven	ROB	12.0	12.0 15.0	\$533.0 \$1.124.0	2262 11358	0.50 1.73	0	0	0.00	
21	Non-Residential		w/ Food Service	Food Service Equipment	ENERGY STAR Dishwasher, Elec Heat, High Temp	per washer	ROB ROB	15.0 16.0	15.0 16.0	\$1,124.0 \$255.0	11358	1.73	0	0	0.00	
22 23	Non-Residential Non-Residential	All	w/ Food Service w/ Food Service	Food Service Equipment Food Service Equipment	ENERGY STAR Dishwasher, Elec Heat, Low Temp High-Efficiency Electric Fryer	per washer per fryer	ROB	12.0	12.0	\$255.0 \$400.0	1789	0.40	0	Ü	0.00	
23	Non-Residential	All	w/ Food Service w/ Food Service	Food Service Equipment	Electric Griddle	per rryer per machine	ROB	12.0	12.0	\$400.0	1637	0.40	0	Ü	0.00	
25	Non-Residential		w/ Food Service	Food Service Equipment	3/4 Size Insulated Hot Holding Cabinet	per cabinet	ROB	12.0	12.0	\$533.0	2832	0.40	0	0	0.00	
26	Non-Residential	All	w/ Food Service	Food Service Equipment	Full Size Insulated Hot Holding Cabinet	per cabinet	ROB	12.0	12.0	\$667.0	5278	0.96	0	0	0.00	
27	Non-Residential	ΔII	w/ Food Service	Food Service Equipment	Half Size Insulated Hot Holding Cabinet	per cabinet	ROB	12.0	12.0	\$400.0	1788	0.33	o o	0	0.00	
28	Non-Residential	ΔII	w/ Food Service	Food Service Equipment	Low-Flow Pre-Rinse Spray Valves	per spray valve	RET	5.0	5.0	\$93.0	7634	0.00	335	0	0.00	
29	Non-Residential	All	w/ Food Service	Food Service Equipment	Steam Cooker, 3 Pan	per cooker	ROB	12.0	12.0	\$1,333.0	11188	2.55	0	0	0.00	
30	Non-Residential	All	w/ Food Service	Food Service Equipment	Steam Cooker, 4 Pan	per cooker	ROB	12.0	12.0	\$1,333.0	12459	2.55	0	0	0.00	0
31	Non-Residential	All	w/ Food Service	Food Service Equipment	Steam Cooker, 5 Pan	per cooker	ROB	12.0	12.0	\$1,333.0	13831	2.55	0	0	0.00	0
32	Non-Residential	All	w/ Food Service	Food Service Equipment	Steam Cooker, 6 Pan	per cooker	ROB	12.0	12.0	\$1,333.0	15170	2.55	0	0	0.00	0
33	Non-Residential	Large Commercial	All	HVAC	Air Cooled Chiller, Single Speed w/ Condenser; < 150 tons, greater than 10.2EER & 13.34 IPLV	per ton	ROB	20.0	20.0	\$142.5	449	0.06	0	0	0.00	0
34	Non-Residential	Large Commercial	All	HVAC	Air Cooled Chiller, Single Speed w/ Condenser; ≥ 150 tons, greater than 10.2EER & 13.6 IPLV	per ton	ROB	20.0	20.0	\$142.5	449	0.06	0	0	0.00	
35	Non-Residential			HVAC	Air Cooled Chiller, VFD w/ Condenser; < 150 tons	per ton	ROB	20.0	20.0	\$142.5	461	0.06	0	0	0.00	
36	Non-Residential			HVAC	Air Cooled Chiller, VFD w/ Condenser; ≥ 150 tons	per ton	ROB	20.0	20.0	\$142.5	461	0.06	0	0	0.00	
37	Non-Residential			HVAC	Electronically Commutated Motors for HVAC Applications - SP Replacement	per motor	RET	15.0	15.0	\$226.0	490	0.10	0	0	0.00	
38	Non-Residential			HVAC	Electronically Commutated Motors for HVAC Applications - PSC Replacement	per motor	RET	15.0	15.0	\$226.0	170	0.03	0	0	0.00	
39	Non-Residential		College/University	HVAC	Economizer Repair; AC/-	per ton	RET	5.0	5.0	\$108.0	211 12	0.01	0	0	0.00	
40	Non-Residential			HVAC	Economizer Repair; AC/-	per ton	RET RET	5.0 5.0	5.0 5.0	\$108.0 \$108.0	12 396	0.00 0.02	0	0	0.00	
41 42	Non-Residential	All		HVAC HVAC	Economizer Repair; AC/-	per ton per ton	RET	5.0	5.0	\$108.0	381	0.02	0	Ü	0.00	
42	Non-Residential Non-Residential	All		HVAC	Economizer Repair; AC/- Economizer Repair; AC/-	per ton	RET	5.0	5.0	\$108.0	157	0.04	0	0	0.00	
43	Non-Residential			HVAC	Economizer Repair; AC/- Economizer Repair; AC/-	per ton	RET	5.0	5.0	\$108.0	91	0.03	0	0	0.00	
45	Non-Residential			HVAC	Economizer Repair; AC/-	per ton	RET	5.0	5.0	\$108.0	98	0.00	0	0	0.00	
46	Non-Residential			HVAC	Economizer Repair, AC/-	per ton	RET	5.0	5.0	\$108.0	79	0.01	0	0	0.00	
47	Non-Residential			HVAC	Economizer Repair; AC/-	per ton	RET	5.0	5.0	\$108.0	123	0.00	n	n	0.01	
48	Non-Residential				Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	211	0.01	3	0	0.00	
49	Non-Residential	All	Grocery	HVAC	Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	12	0.00	0	0	0.00	
50	Non-Residential	All	Hotel/Motel	HVAC	Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	396	0.02	8	0	0.00	0
51	Non-Residential	All		HVAC	Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	381	0.04	18	0	0.00	0
52	Non-Residential	All		HVAC	Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	157	0.03	6	0	0.00	
53	Non-Residential			HVAC	Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	91	0.00	1	0	0.00	
54	Non-Residential	All		HVAC	Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	98	0.01	1	0	0.00	
55	Non-Residential	All		HVAC	Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	79	0.02	5	0	0.00	0
56	Non-Residential		Warehouse	HVAC	Economizer Repair; AC/Gas	per ton	RET	5.0	5.0	\$108.0	123	0.00	4	0	0.01	0
57	Non-Residential		College/University	HVAC	Economizer Repair; HP	per ton	RET	5.0	5.0	\$108.0	401	0.04	0	0	0.00	
58	Non-Residential			HVAC	Economizer Repair; HP	per ton	RET	5.0	5.0	\$108.0	24	0.00	0	0	0.00	
59 60	Non-Residential			HVAC HVAC	Economizer Repair; HP	per ton	RET RET	5.0 5.0	5.0 5.0	\$108.0 \$108.0	592 790	0.04	0	0	0.00	
00	Non-Residential	Pall	Medical	INVAC	Economizer Repair; HP	per ton	KEI	5.0	5.0	\$ 108.0	790	0.06	oj	U	0.00	ı ol

Measure							Retrofit (RET), Replace-on-		Efficient Unit	Total	Annual kWh	Annual kW	Annual Gas	Annual kWh	Annual kW	Annual Gas
ID	Sector	Sub-Sector	Building Type	End Use	Measure Name	Measure Unit Name		Lifetime	Lifetime	Incremental	Savings	Coincident	Savings	Increases	Coincident Peak	
61	Non-Residential A	· ·	Office	HVAC	Economizer Repair: HP	per ton	Construction (NEW) RET	(Years)	(Years)	Cost \$108.0	320	Peak Savings 0.05	(Therms)		Increases 0.00	Increase
62	Non-Residential A	All		HVAC			RET		5.0		320 165	0.05			0.00	
63	Non-Residential A		Restaurant Retail/Service	HVAC	Economizer Repair; HP Economizer Repair: HP	per ton per ton	RET	5.0 5.0	5.0	\$108.0 \$108.0	225	0.01			0.00	
		ui		HVAC		per ton	RET	5.0	5.0	\$108.0	162	0.02			0.00	
64 65	rion recordential	ui	School (K-12)	HVAC	Economizer Repair; HP	per ton	RET	5.0	5.0	\$108.0	187	0.02			0.00	
66			Warehouse	HVAC	Economizer Repair; HP	per ton	ROB	15.0	15.0	\$108.0	90	0.01	"		0.00	
67	Non-Residential A		All	HVAC	Air-Source Heat Pump, Tier 1; < 5.4 tons, greater than 14.0 SEER & 11.6 EER Air-Source Heat Pump, Tier 1; ≥ 5.4 tons & < 20 tons, greater than 11.5 SEER & 11.7 EER	per ton	ROB	15.0	15.0	\$67.0	162	0.05	"		0.00	
68	Non-Residential A		All	HVAC		per ton	ROB	15.0	15.0	\$67.0	90	0.90			0.00	
69	Non-Residential A		All	HVAC	Air-Source Heat Pump, Tier 1; ≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & 10.3 EER Air-Source Heat Pump, Tier 1; ≥ 63.3 tons, greater than 10.2 SEER & 10.3 EER	per ton	ROB	15.0	15.0	\$67.0	72	0.05	"		0.00	
70	Non-Residential A	ui	All	HVAC	Air-Source Heat Pump, Tier 1; 2 63.3 tons, greater than 10.2 SEER & 10.3 EER Air-Source Heat Pump, Tier 2; < 5.4 tons, greater than 15.0 SEER & 12.0 EER	per ton	ROB	15.0	15.0	\$100.0	180	0.04			0.00	
71	Non-Residential A		All	HVAC	Air-Source Heat Pump, Tier 2; < 5.4 tons, greater than 15.0 SEER & 12.0 EER Air-Source Heat Pump, Tier 2; ≥ 5.4 tons & < 20 tons, greater than 12.0 SEER & 12.2 EER	per ton	ROB	15.0	15.0	\$100.0	252	1.40	"		0.00	
72	Non-Residential A		All	HVAC	Air-Source Heat Pump, Tier 2; ≥ 20 tons & < 20 tons, greater than 10.3 SEER & 10.6 EER	per ton	ROB	15.0	15.0	\$100.0	181	0.10			0.00	
73	Non-Residential A		All	HVAC	Air-Source Heat Pump, Tier 2; ≥ 63.3 tons, greater than 9.7 SEER & 9.8 EER	per ton	ROB	15.0	15.0	\$100.0	145	0.08			0.00	
74	Non-Residential A		College/University	HVAC	Commercial Kitchen Demand Hood Controls	per ton	RET	15.0	15.0	\$1,000.0	1265	0.06	173		0.00	
75	Non-Residential A	ui	Hotel/Motel	HVAC	Commercial Kitchen Demand Hood Controls	per hp	RET	15.0	15.0	\$1,000.0	3370	0.35	414		0.00	
76	Non-Residential A	ui	Restaurant	HVAC	Commercial Kitchen Demand Hood Controls	per hp	RET	15.0	15.0	\$1,000.0	2527	0.35	279		0.00	
77	Non-Residential A		School (K-12)	HVAC	Commercial Kitchen Demand Hood Controls Commercial Kitchen Demand Hood Controls	per hp	RET	15.0	15.0	\$1,000.0	923	0.00	173		0.00	
78			Hotel/Motel	HVAC		per sq. ft.	RET	15.0	15.0	\$1,000.0	923	0.00	1/3		0.00	
79	Non-Residential A Non-Residential A		Hotel/Motel	HVAC	Occupancy-Based PTAC/PTHP Controls Occupancy-Based PTAC/PTHP Controls	per sq. rt. per sq. ft.	ROB	15.0	15.0	\$0.7	1	0.00			0.00	
80	Non-Residential A		Hotel/Motel	HVAC			NEW	15.0	15.0	\$0.7		0.00			0.00	
		All	All		Occupancy-Based PTAC/PTHP Controls	per sq. ft.			15.0 15.0		1 222		0	0		
81 82	Non-Residential A Non-Residential A	All	All	HVAC HVAC	Packaged Terminal AC; < 0.75 tons, greater than 14.0 EER	per ton	ROB ROB	15.0 15.0	15.0 15.0	\$50.9 \$50.9	222	0.11 0.10	0	0	0.00	
			All		Packaged Terminal AC; ≥ 0.75 tons & < 1.00 ton, greater than 14.0 EER	per ton	ROB		15.0 15.0	\$50.9 \$110.5	230 185		0	0		
83 84	Non-Residential A		All	HVAC HVAC	Packaged Terminal AC; ≥ 1.00 ton, greater than 14.0 EER	per ton	ROB	15.0 15.0	15.0 15.0	\$110.5 \$145.4	185 243	0.09	0	0	0.00	
			ΔII		Packaged Terminal HP; < 0.75 tons, greater than 11.8 EER	per ton							0	0		
85	Non-Residential A	All	All	HVAC HVAC	Packaged Terminal HP; ≥ 0.75 tons & < 1.0, greater than 11.0 EER	per ton	ROB	15.0	15.0	\$145.4	243	0.11	0	0	0.00	
86 87	Non-Residential A	All	All	HVAC	Packaged Terminal HP; ≥ 1.0, greater than 10.3 EER	per ton	ROB	15.0	15.0 18.0	\$137.9 \$263.7	221	0.11		0	0.00	
88			General Commercial	HVAC	Small Business Duct Efficiency Improvements - AC/Gas	per system	RET RET	18.0 18.0	18.0 18.0		1209 2141	1.72 1.97	58	0	0.00	
			General Commercial		Small Business Duct Efficiency Improvements - AC/ER	per system	RET	18.0	18.0 18.0	\$466.8 \$288.9	2141 2672	1.97	0	0		
89			General Commercial	HVAC	Small Business Duct Efficiency Improvements - HP	per system	RET	18.0	18.0 10.0	\$288.9 \$35.0	2672	0.05	0	0	0.00	
90	Non-Residential S			HVAC	Small Business AC Tune-up; < 5.4 tons	per ton	RET	10.0	10.0		91 97		0	0	0.00	
91	Non-Residential S			HVAC	Small Business AC Tune-up; ≥ 5.4 tons & < 11.25 tons	per ton	RET	10.0	10.0	\$35.0 \$35.0	106	0.05	0	0	0.00	
92	Non-Residential S			HVAC	Small Business AC Tune-up; ≥ 11.25 tons	per ton								0		
93	Non-Residential S			HVAC	Small Business HP Tune-up; < 5.4 tons	per ton	RET	10.0	10.0	\$35.0	340	0.05	0	0	0.00	
94	Non-Residential S			HVAC	Small Business HP Tune-up; ≥ 5.4 tons & < 11.25 tons	per ton	RET	10.0	10.0	\$35.0	281	0.05	0	0	0.00	
95	Non-Residential S			HVAC	Small Business HP Tune-up; ≥ 11.25 tons	per ton	RET	10.0	10.0	\$35.0	297	0.06	0	0	0.00	
96	Non-Residential S			HVAC	Small Business Smart T-stats , AC & ER Heat	per sq. ft.	RET	11.0	11.0	\$0.0	1	0.00	0	0	0.00	
97	Non-Residential S			HVAC	Small Business Smart T-stats, AC & Gas Heat	per sq. ft.	RET	11.0	11.0	\$0.0	0	0.00	0	0	0.00	
98		Small Commercial		HVAC	Small Business Smart T-stats, HP	per sq. ft.	RET	11.0	11.0	\$0.0	0	0.00	0	0	0.00	
99	Non-Residential A	ui	All	HVAC	Split System, Tier 1; < 5.4 tons, greater than 14.0 SEER & 12.0 EER	per ton	ROB	15.0	15.0	\$72.4	86	0.06	0	0	0.00	
100	Non-Residential A	ui	All	HVAC	Split System, Tier 1; ≥ 5.4 tons & < 20 tons, greater than 11.5 SEER & 11.7 EER	per ton	ROB	15.0	15.0	\$138.7	39	0.03	0	0	0.00	
101	Non-Residential A		All	HVAC	Split System, Tier 1; ≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & 10.3 EER	per ton	ROB	15.0	15.0	\$53.9	70	0.05	0	0	0.00	
102	Non-Residential A		All	HVAC	Split System, Tier 1; ≥ 63.3 tons, greater than 10.2 SEER & 10.3 EER	per ton	ROB	15.0	15.0 15.0	\$52.3	78 132	0.05	0	0	0.00	
103	Non-Residential A		All	HVAC	Split System, Tier 2; < 5.4 tons, greater than 15.0 SEER & 12.5 EER	per ton	ROB	15.0		\$144.7		0.11	0	0	0.00	
104	Non-Residential A		All	HVAC	Split System, Tier 2; ≥ 5.4 tons & < 20 tons, greater than 12.0 SEER & 12.2 EER	per ton	ROB	15.0	15.0	\$277.5	105	0.07		0	0.00	
105	Non-Residential A		All	HVAC	Split System, Tier 2; ≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & 10.6 EER	per ton	ROB	15.0	15.0	\$55.5	139	0.09	0	0	0.00	
106	Non-Residential A	ui	All	HVAC	Split System, Tier 2; ≥ 63.3 tons, greater than 9.7 SEER & 9.8 EER	per ton	ROB	15.0	15.0	\$55.5	81	0.09	0	0	0.00	
107	Non-Residential A		All	HVAC	Unitary AC, Tier 1; < 5.4 tons, greater than 14.0 SEER & 11.6 EER	per ton	ROB	15.0	15.0	\$72.4	86	0.06	0	0	0.00	
108	Non-Residential A		All All	HVAC	Unitary AC, Tier 1; ≥ 5.4 tons & < 20 tons, greater than 11.5 SEER & 11.7 EER	per ton	ROB	15.0	15.0	\$138.7	39	0.03	0	0	0.00	
109	Non-Residential A			HVAC	Unitary AC, Tier 1; ≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & 10.3 EER	per ton	ROB	15.0	15.0	\$53.9	70	0.05	0	0	0.00	
110	Non-Residential A		All	HVAC	Unitary AC, Tier 1; ≥ 63.3 tons, greater than 10.2 SEER & 10.3 EER	per ton	ROB	15.0	15.0	\$52.3	78	0.05	0	0	0.00	
111	Non-Residential A		All	HVAC	Unitary AC, Tier 2; < 5.4 tons, greater than 15.0 SEER & 12.0 EER	per ton	ROB	15.0	15.0	\$144.7	172	0.11	0	0	0.00	
112	Non-Residential A	ui	All	HVAC	Unitary AC, Tier 2; ≥ 5.4 tons & < 20 tons, greater than 12.0 SEER & 12.2 EER	per ton	ROB	15.0	15.0	\$277.5	105	0.07	0	0	0.00	
113	Non-Residential A	ui	All	HVAC	Unitary AC, Tier 2; ≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & 10.6 EER	per ton	ROB	15.0	15.0	\$55.5	139	0.09	0		0.00	
114	Non-Residential A		All	HVAC	Unitary AC, Tier 2; ≥ 63.3 tons, greater than 9.7 SEER & 9.8 EER	per ton	ROB	15.0	15.0	\$55.5	81	0.05	0		0.00	
115		Agricultural	General Livestock	HVAC	Ventilation Fan, Retrofit; 36-47"	per building	RET	10.0	10.0	\$4,050.0	4515	0.89	0	0	0.00	
116		Agricultural	General Livestock	HVAC	Ventilation Fan, Retrofit; 48-61"	per building	RET	10.0	10.0	\$13,500.0	23684	4.67	0	0	0.00	
117	rion ricolacina	All	Medical	HVAC	VFD Fan	per hp	ROB	10.0	10.0	\$152.5	1218	0.12	0	0	0.00	
118	Non-Residential A		Office	HVAC	VFD Fan	per hp	ROB	10.0	10.0	\$152.5	408	0.12	0	0	0.00	
119	Non-Residential A		Restaurant	HVAC	VFD Fan	per hp	ROB	10.0	10.0	\$152.5	825	0.12	0	0	0.00	
120	Non-Residential A	All	Retail/Service	HVAC	VFD Fan	per hp	ROB	10.0	10.0	\$152.5	609	0.12	1 0) o	0.00	ا (٥

Measure ID	Sector	Sub-Sector	Building Type	End Use	Measure Name	Measure Unit Name	Retrofit (RET), Replace-on- Burnout (ROB), or New Construction (NEW)	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost	Annual kWh Savings	Annual kW Coincident Peak Savings		nnual kWh	Annual kW Coincident Peak Increases	Annual Ga Therms Increase
121	Non-Residential		School (K-12)	HVAC	VFD Fan	per hp	ROB	10.0	10.0	\$152.5	391	0.12	0	0	0.00	increase
122	Non-Residential		Warehouse	HVAC	VFD Fan	per hp	ROB	10.0	10.0	\$152.5	571	0.12	0	0	0.00	1
123	Non-Residential		Medical	HVAC	VFD Pump, Chilled Water	per hp	ROB	10.0	10.0	\$152.5	1976	0.21	0	0	0.00	
124	Non-Residential		Office	HVAC HVAC	VFD Pump, Chilled Water	per hp per hp	ROB ROB	10.0 10.0	10.0 10.0	\$152.5 \$152.5	662 1338	0.21 0.21	0	0	0.00	
125 126	Non-Residential A		Restaurant Retail/Service	HVAC	VFD Pump, Chilled Water VFD Pump, Chilled Water	per np per hp	ROB	10.0	10.0	\$152.5 \$152.5	989	0.21	0	0	0.00	
120	Non-Residential		School (K-12)	HVAC	VFD Pump, Chilled Water	per hp	ROB	10.0	10.0	\$152.5	634	0.21	0	0	0.00	
128	Non-Residential		Warehouse	HVAC	VFD Pump, Chilled Water	per hp	ROB	10.0	10.0	\$152.5	927	0.21	0	0	0.00	1
129	Non-Residential		Medical	HVAC	VFD Pump, Hot Water	per hp	ROB	10.0	10.0	\$152.5	2038	0.00	0	0	0.00	1
130	Non-Residential	All	Office	HVAC	VFD Pump, Hot Water	per hp	ROB	10.0	10.0	\$152.5	683	0.00	0	0	0.00	1
131	Non-Residential		Restaurant	HVAC	VFD Pump, Hot Water	per hp	ROB	10.0	10.0	\$152.5	1381	0.00	0	0	0.00	
132	Non-Residential		Retail/Service	HVAC	VFD Pump, Hot Water	per hp	ROB	10.0	10.0	\$152.5	1020	0.00	0	0	0.00	
133	Non-Residential		School (K-12)	HVAC HVAC	VFD Pump, Hot Water	per hp	ROB	10.0	10.0	\$152.5 \$152.5	654	0.00	0	0	0.00	
134 135	Non-Residential /		Warehouse College/University	HVAC	VFD Pump, Hot Water Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	per hp per ton	ROB ROB	10.0 15.0	10.0 15.0	\$152.5 \$22.7	956 107	0.00 0.05	0	0	0.00	1
136	Non-Residential		Grocery	HVAC	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	per ton	ROB	15.0	15.0	\$22.7 \$21.4	107	0.05	0	0	0.00	1
137	Non-Residential		Hotel/Motel	HVAC	Variable Refrigerant Flow HVAC: 10% greater than baseline efficiency	per ton	ROB	15.0	15.0	\$20.7	98	0.02	0	0	0.00	1
138	Non-Residential		School (K-12)	HVAC	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	per ton	ROB	15.0	15.0	\$19.6	93	0.05	ő	0	0.00	
139	Non-Residential		Medical	HVAC	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	per ton	ROB	15.0	15.0	\$22.4	106	0.05	0	0	0.00	
140	Non-Residential	All	Office	HVAC	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	per ton	ROB	15.0	15.0	\$23.7	112	0.05	0	0	0.00	1
141	Non-Residential		Restaurant	HVAC	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	per ton	ROB	15.0	15.0	\$26.9	127	0.05	0	0	0.00	1
142	Non-Residential		Retail/Service	HVAC	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	per ton	ROB	15.0	15.0	\$20.4	96	0.05	0	0	0.00	1
143		Large Commercial		HVAC	Water Cooled Centrifugal Chiller, Single Speed; < 300 tons, greater than 0.59 kW/ton & 0.56 IPLV	per ton	ROB	20.0	20.0	\$411.0	188	0.09	0	0	0.00	
144		Large Commercial		HVAC	Water Cooled Centrifugal Chiller, Single Speed; ≥ 300 & < 600 tons, greater than 0.56 kW/ton & 0.53 IPLV	per ton	ROB	20.0	20.0	\$125.8	62	0.04	0	0	0.00	
145 146	Non-Residential	Large Commercial Large Commercial		HVAC HVAC	Water Cooled Centrifugal Chiller, Single Speed; ≥ 600 tons, greater than 0.55 kW/ton & 0.52 IPLV Water Cooled Chiller, Single Speed; < 150 tons, greater than 0.71 kW/ton & 0.56 IPLV	per ton per ton	ROB ROB	20.0 20.0	20.0 20.0	\$27.3 \$388.0	43 199	0.02 0.06	0	0	0.00	
147		Large Commercial		HVAC	Water Cooled Chiller, Single Speed; < 150 tons, greater than 0.71 kW/ton & 0.56 kW/ton & 0.47 IPLV Water Cooled Chiller, Single Speed; ≥ 150 & < 300 tons, greater than 0.58 kW/ton & 0.47 IPLV	per ton	ROB	20.0	20.0	\$388.0	271	0.06	0	0	0.00	
148		Large Commercial		HVAC	Water Cooled Chiller, Single Speed; ≥ 300 tons, greater than 0.56 kW/ton & 0.47 IPLV	per ton	ROB	20.0	20.0	\$27.2	209	0.06	0	0	0.00	1
149		Large Commercial		HVAC	Water Cooled Centrifugal Chiller, VFD; < 300 tons, greater than 0.59 kW/ton & 0.42 IPLV	per ton	ROB	20.0	20.0	\$200.6	233	0.05	0	0	0.00	1
150		Large Commercial		HVAC	Water Cooled Centrifugal Chiller, VFD; ≥ 300 & < 600 tons, greater than 0.58 kW/ton & 0.38 IPLV	per ton	ROB	20.0	20.0	\$156.7	322	0.09	0	0	0.00	1
151	Non-Residential	Large Commercial	All	HVAC	Water Cooled Centrifugal Chiller, VFD; ≥ 600 tons, greater than 0.57 kW/ton & 0.38 IPLV	per ton	ROB	20.0	20.0	\$125.4	226	0.05	0	0	0.00	
152	Non-Residential			HVAC	Water Cooled Chiller, VFD; < 150 tons, greater than 0.73 kW/ton & 0.54 IPLV	per ton	ROB	20.0	20.0	\$180.8	428	0.09	0	0	0.00	
153	Non-Residential			HVAC	Water Cooled Chiller, VFD; ≥ 150 & < 300 tons, greater than 0.61 kW/ton & 0.44 IPLV	per ton	ROB	20.0	20.0	\$126.5	301	0.04	0	0	0.00	1
154		Large Commercial		HVAC	Water Cooled Chiller, VFD; ≥ 300 tons, greater than 0.58 kW/ton & 0.44 IPLV	per ton	ROB	20.0	20.0	\$95.2	291	0.00	0	0	0.00	1
155 156	Non-Residential /		Poultry	Lighting	LED Tube 4' 2 lamp Egg collection	per building	RET RET	2.0 2.0	15.0 15.0	\$88.2 \$176.5	190 207	0.05 0.06	0	0	0.00	1
157	Non-Residential		Poultry Poultry	Lighting Lighting	LED Tube 8' 2 lamp Egg collection LED Tube 8' 2 lamp Egg storage (24hr)	per building per building	RET	2.0	15.0	\$176.5 \$176.5	611	0.06	0	0	0.00	1
158			College/University	Lighting	LED Pin-based Replacement Lamps	per bulb	RET	2.0	11.0	\$21.3	109	0.03	0	0	0.00	
159	Non-Residential			Lighting	LED Pin-based Replacement Lamps	per bulb	RET	2.0	11.0	\$21.3	177	0.04	0	0	0.00	
160	Non-Residential	Large Commercial	Hotel/Motel	Lighting	LED Pin-based Replacement Lamps	per bulb	RET	2.0	11.0	\$21.3	148	0.02	0	0	0.00	1
161	Non-Residential	Large Commercial	Medical	Lighting	LED Pin-based Replacement Lamps	per bulb	RET	2.0	11.0	\$21.3	136	0.03	0	0	0.00	1
162		Large Commercial		Lighting	LED Pin-based Replacement Lamps	per bulb	RET	2.0	11.0	\$21.3	149	0.03	0	0	0.00	1
163	Non-Residential			Lighting	LED Pin-based Replacement Lamps	per bulb	RET	2.0	11.0	\$21.3	114	0.03	0	0	0.00	
164		Large Commercial		Lighting	LED Pin-based Replacement Lamps	per bulb	RET	2.0	11.0	\$21.3	161 130	0.03	0	0	0.00	
165 166	Non-Residential I Non-Residential I			Lighting Lighting	LED Pin-based Replacement Lamps LED Pin-based Replacement Lamps	per bulb per bulb	RET RET	2.0 2.0	11.0 11.0	\$21.3 \$21.3	130	0.03 0.02	0	0	0.00	
167		Large Commercial		Lighting	LED Pin-based Replacement Lamps	per bulb	RET	2.0	11.0	\$21.3	112	0.02	0	0	0.00	1
168			College/University	Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET	2.0	11.0	\$21.3	109	0.03	0	0	0.00	1
169	Non-Residential			Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET	2.0	11.0	\$21.3	177	0.04	ő	0	0.00	1
170	Non-Residential			Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET	2.0	11.0	\$21.3	148	0.02	0	0	0.00	1
171	Non-Residential			Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET	2.0	11.0	\$21.3	136	0.03	0	0	0.00	
172		Large Commercial		Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET	2.0	11.0	\$21.3	149	0.03	0	0	0.00	
173		Large Commercial		Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET	2.0	11.0	\$21.3	114	0.03	0	0	0.00	
174		Large Commercial		Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET	2.0	11.0	\$21.3	161	0.03	0	0	0.00	1
175		Large Commercial		Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET	2.0	11.0	\$21.3	130	0.03	0	0	0.00	1
176		Large Commercial		Lighting	LED Screw-Base Replacement for HID Lamps	per bulb	RET RET	2.0 2.0	11.0 11.0	\$21.3 \$21.3	85 112	0.02 0.03	0	0	0.00	
177 178	Non-Residential I	Large Commercial		Lighting	LED Screw-Base Replacement for HID Lamps Small Business LED Screw-ins	per bulb per bulb	ROB			\$21.3 \$29.2	112	0.03	ů	0	0.00	
178	Non-Residential			Lighting Lighting	Small Business LED Screw-ins Small Business LED Screw-ins	per bulb	ROB	3.0 3.0	9.0 9.0	\$29.2 \$28.7	114	0.04	0	0	0.00	
180		Small Commercial		Lighting	Small Business LED Screw-ins Small Business LED Screw-ins	per bulb	ROB	3.0	9.0	\$28.7 \$20.8	81	0.03	0	0	0.00	

							Retrofit (RET), Replace-on-	Raseline Unit	Efficient Unit	Total		Annual kW	Annual Gas		Annual kW	Annual Gas
Measure	Sector	Sub-Sector	Building Type	End Use	Measure Name	Measure Unit Name		Lifetime	Lifetime	Incremental	Annual kWh	Coincident	Savings	Annual KWh	Coincident Peak	Therms
			* **				Construction (NEW)	(Years)	(Years)	Cost	Savings	Peak Savings	(Therms)	Increases	Increases	Increase
181	Non-Residential	Small Commercial		Lighting	Small Business LED Screw-ins	per bulb	ROB	3.0		\$31.0	121	0.04	(0	0.00	, c
182	Non-Residential	Small Commercial		Lighting	Small Business LED Screw-ins	per bulb	ROB	3.0		\$23.3		0.04	(0	0.00	
183				Lighting	Small Business LED Screw-ins	per bulb	ROB	3.0		\$23.3		0.03	(0	0.00	
184 185				Lighting	Small Business LED Screw-ins	per bulb per bulb	ROB RET	3.0		\$27.5 \$148.3		0.03 0.07		1 1	0.00	
185 186	Non-Residential Non-Residential			Lighting	T-LED Replacement Lamps/Tubes	per bulb	RET	2.0		\$148.3 \$148.3		0.07		1 1	0.00	
186	Non-Residential			Lighting Lighting	T-LED Replacement Lamps/Tubes T-LED Replacement Lamps/Tubes	per bulb	RET	2.0		\$148.3 \$148.3		0.10			0.00	
188	Non-Residential	Large Commercial		Lighting	T-LED Replacement Lamps/Tubes	per bulb	RET	2.0		\$148.3		0.08		1 1	0.00	
189	Non-Residential	Large Commercial		Lighting	T-LED Replacement Lamps/Tubes	per bulb	RET	2.0		\$148.3		0.08	,	il il	0.00	
190	Non-Residential			Lighting	T-LED Replacement Lamps/Tubes	per bulb	RET	2.0		\$148.3		0.08	,	il il	0.00	
191	Non-Residential			Lighting	T-LED Replacement Lamps/Tubes	per bulb	RET	2.0		\$148.3		0.08	č	o o	0.00	
192	Non-Residential	Large Commercial	Retail/Service	Lighting	T-LED Replacement Lamps/Tubes	per bulb	RET	2.0	11.0	\$148.3	364	0.10	Ċ	0	0.00	, ,
193	Non-Residential	Large Commercial	School (K-12)	Lighting	T-LED Replacement Lamps/Tubes	per bulb	RET	2.0	11.0	\$148.3	238	0.05	C	0	0.00	, ,
194	Non-Residential	Large Commercial	Warehouse	Lighting	T-LED Replacement Lamps/Tubes	per bulb	RET	2.0	11.0	\$148.3	313	0.08	C	0	0.00	, ,
195	Non-Residential	Large Commercial	College/University	Lighting	LED Exterior Fixtures	per fixture	RET	2.0		\$707.5		0.30	0	0	0.00	
196	Non-Residential	Large Commercial	Grocery	Lighting	LED Exterior Fixtures	per fixture	RET	2.0		\$707.5		0.41	0	0	0.00	
197	Non-Residential			Lighting	LED Exterior Fixtures	per fixture	RET	2.0		\$707.5		0.23	(0	0.00	
198	Non-Residential			Lighting	LED Exterior Fixtures	per fixture	RET	2.0		\$707.5		0.34	0	0	0.00	
199	Non-Residential	Large Commercial		Lighting	LED Exterior Fixtures	per fixture	RET	2.0		\$707.5		0.32	C	0	0.00	
200	Non-Residential	Large Commercial		Lighting	LED Exterior Fixtures	per fixture	RET	2.0		\$707.5		0.33	C	0	0.00	
201	Non-Residential			Lighting	LED Exterior Fixtures	per fixture	RET	2.0		\$707.5		0.35	9	0	0.00	
202	Non-Residential			Lighting	LED Exterior Fixtures	per fixture	RET	2.0		\$707.5		0.40		0	0.00	
203 204	Non-Residential			Lighting	LED Exterior Fixtures	per fixture	RET RET	2.0		\$707.5 \$707.5		0.20		0	0.00	
	Non-Residential Non-Residential			Lighting	LED Exterior Fixtures Small Business LED Exterior Lights	per fixture	ROB	4.0		\$707.5 \$339.7	1305 731	0.35		1 1	0.00	
205 206				Lighting Lighting	Small Business LED Exterior Lights Small Business LED Exterior Lights	per bulb per bulb	ROB	4.0		\$339.7 \$420.9		0.03		1 1	0.00	
207				Lighting	Small Business LED Exterior Lights	per bulb	ROB	4.0		\$329.1	708	0.08		1 1	0.00	
208				Lighting	Small Business LED Exterior Lights	per bulb	ROB	4.0		\$326.7	703	0.03	,	il il	0.00	
209				Lighting	Small Business LED Exterior Lights	per bulb	ROB	4.0		\$320.8	690	0.01	č	i i	0.00	
210				Lighting	Small Business LED Exterior Lights	per bulb	ROB	4.0		\$396.9	854	0.11	č	o o	0.00	
211				Lighting	Small Business LED Exterior Lights	per bulb	ROB	4.0		\$256.7	552	0.00	č	o o	0.00	
212				Lighting	Small Business LED Exterior Lights	per bulb	ROB	4.0		\$275.7	593	0.04	Ċ	0	0.00	
213	Non-Residential			Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0	11.0	\$12.7	109	0.03	0	0	0.00	, ,
214	Non-Residential	Large Commercial	Grocery	Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0	11.0	\$12.7	177	0.04	C	0	0.00	, ,
215	Non-Residential	Large Commercial	Hotel/Motel	Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0	11.0	\$12.7		0.02	0	0	0.00	
216	Non-Residential			Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0		\$12.7		0.03	0	0	0.00	
217	Non-Residential	Large Commercial		Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0		\$12.7	149	0.03	(0	0.00	
218	Non-Residential			Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0		\$12.7		0.03	C	0	0.00	
219	Non-Residential			Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0		\$12.7		0.03	9	0	0.00	
220	Non-Residential			Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0		\$12.7		0.03		0	0.00	
221	Non-Residential			Lighting	LED Downlight or Pendant Fixture	per fixture per fixture	RET RET	2.0		\$12.7 \$12.7	85 112	0.02		1 1	0.00	
222 223	Non-Residential Non-Residential			Lighting	LED Downlight or Pendant Fixture	per fixture	RET	2.0		\$12.7		0.03		1 1	0.00	
223	Non-Residential			Lighting Lighting	LED High-Bay Fixture LED High-Bay Fixture	per fixture	RET	2.0		\$317.3		0.39		1 1	0.00	
225	Non-Residential			Lighting	LED High-Bay Fixture	per fixture	RET	2.0		\$317.3		0.22		1 1	0.00	
226	Non-Residential			Lighting	LED High-Bay Fixture	per fixture	RET	2.0		\$317.3		0.32	,	il il	0.00	
227	Non-Residential	Large Commercial		Lighting	LED High-Bay Fixture	per fixture	RET	2.0		\$317.3		0.31	Č	ا ا	0.00	
228	Non-Residential			Lighting	LED High-Bay Fixture	per fixture	RET	2.0		\$317.3		0.32	č	o o	0.00	
229	Non-Residential			Lighting	LED High-Bay Fixture	per fixture	RET	2.0		\$317.3		0.33	Ċ	0	0.00	
230	Non-Residential			Lighting	LED High-Bay Fixture	per fixture	RET	2.0		\$317.3		0.38	Ċ	0	0.00	
231	Non-Residential			Lighting	LED High-Bay Fixture	per fixture	RET	2.0	11.0	\$317.3	941	0.19	Ċ	0	0.00	0
232	Non-Residential		Warehouse	Lighting	LED High-Bay Fixture	per fixture	RET	2.0		\$317.3		0.33	(0	0.00	
233	Non-Residential			Lighting	LED Troffer or Panel Fixture	per fixture	RET	2.0		\$125.0		0.06	0	0	0.00	
234	Non-Residential	Large Commercial		Lighting	LED Troffer or Panel Fixture	per fixture	RET	2.0		\$125.0		0.08	(0	0.00	
235	Non-Residential			Lighting	LED Troffer or Panel Fixture	per fixture	RET	2.0		\$125.0		0.04	(0	0.00	
236	Non-Residential			Lighting	LED Troffer or Panel Fixture	per fixture	RET	2.0		\$125.0		0.06	0	0	0.00	
237	Non-Residential			Lighting	LED Troffer or Panel Fixture	per fixture	RET	2.0		\$125.0		0.06	(0	0.00	
238				Lighting	LED Troffer or Panel Fixture	per fixture	RET	2.0		\$125.0		0.06	(0	0.00	
239		Large Commercial Large Commercial		Lighting Lighting	LED Troffer or Panel Fixture LED Troffer or Panel Fixture	per fixture per fixture	RET RET	2.0		\$125.0 \$125.0		0.07	(0	0.00	
240																

Π.								Retrofit (RET), Replace-on-	Baseline Unit	Efficient Unit	Total	A	Annual kW	Annual Gas	Annual kWh	Annual kW	Annual Gas
- 1	Measure	Sector	Sub-Sector	Building Type	End Use	Measure Name	Measure Unit Name		Lifetime	Lifetime	Incremental	Annual kWh	Coincident	Savings		Coincident Peak	Therms
	ID							Construction (NEW)	(Years)	(Years)	Cost	Savings	Peak Savings	(Therms)	Increases	Increases	Increase
Г	241	Non-Residential	Large Commercial	School (K-12)	Lighting	LED Troffer or Panel Fixture	per fixture	RET	2.0	11.0	\$125.0	190	0.04	0	0	0.00	. 0
	242	Non-Residential	Large Commercial	Warehouse	Lighting	LED Troffer or Panel Fixture	per fixture	RET	2.0	11.0	\$125.0	250	0.07	0	0	0.00	. 0
	243	Non-Residential	Municipal Lighting	All	Lighting	4,800 Lumens LED Open Type	per fixture	RET	4.0	20.0		292	0.00	0	0	0.00	. 0
	244	Non-Residential	Municipal Lighting	All	Lighting	4,800 Lumens LED Open Type	per fixture	RET	4.0			532	0.00	0	0	0.00	. 0
	245	Non-Residential	Municipal Lighting	All	Lighting	ATB0 grey 108w	per fixture	RET	4.0	20.0	\$629.0	824	0.00	0	0	0.00	. 0
	246	Non-Residential	Municipal Lighting	All	Lighting	ATB0 grey 108w	per fixture	RET	4.0			804	0.00	0	0	0.00	. 0
	247	Non-Residential	Municipal Lighting	All	Lighting	ATB0 grey 72w	per fixture	RET	4.0	20.0	\$573.0	204	0.00	0	0	0.00	. 0
	248	Non-Residential	Municipal Lighting	All	Lighting	ATB0 grey 72w	per fixture	RET	4.0	20.0	\$573.0	556	0.00	0	0	0.00	. 0
	249	Non-Residential	Municipal Lighting	All	Lighting	ATB0 grey 72w	per fixture	RET	4.0	20.0	\$573.0	204	0.00	0	0	0.00	. 0
	250		Municipal Lighting		Lighting	ATB2 grey 216w	per fixture	RET	4.0	20.0	\$908.0	656	0.00	0	0	0.00	. 0
	251	Non-Residential	Municipal Lighting	All	Lighting	ATB2 grey 216w	per fixture	RET	4.0	20.0	\$908.0	884	0.00	0	0	0.00	. 0
	252	Non-Residential	Municipal Lighting	All	Lighting	ATB2 grey 216w	per fixture	RET	4.0			1084	0.00	0	0	0.00	. 0
	253	Non-Residential	Municipal Lighting	All	Lighting	ATB2 grey 216w	per fixture	RET	4.0	20.0	\$908.0	1024	0.00	0	0	0.00	. 0
	254	Non-Residential	Large Commercial	College/University	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	126	0.08	0	0	0.00	. 0
	255	Non-Residential	Large Commercial	Grocery	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	205	0.11	0	0	0.00	. 0
	256	Non-Residential	Large Commercial	Hotel/Motel	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	171	0.05	0	0	0.00	. 0
	257	Non-Residential	Large Commercial	Medical	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	158	0.09	0	0	0.00	. 0
	258	Non-Residential	Large Commercial	Miscellaneous	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0		\$50.0	172	0.09	0	0	0.00	. 0
	259	Non-Residential	Large Commercial	Office	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	132	0.09	0	0	0.00	. 0
	260	Non-Residential	Large Commercial	Restaurant	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	186	0.09	0	0	0.00	. 0
	261	Non-Residential	Large Commercial	Retail/Service	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	150	0.11	0	0	0.00	. 0
	262	Non-Residential	Large Commercial	School (K-12)	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	98	0.05	0	0	0.00	. 0
	263	Non-Residential	Large Commercial	Warehouse	Lighting	Daylight Control/Harvesting (On/Off)	per control	RET	8.0	8.0	\$50.0	129	0.09	0	0	0.00	. 0
	264	Non-Residential	Large Commercial	School (K-12)	Lighting	Daylight Harvesting (Dimming)	per control	RET	8.0	8.0	\$50.0	47	0.02	0	0	0.00	. 0
	265	Non-Residential	Large Commercial	College/University	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0	8.0	\$125.0	126	0.08	0	0	0.00	. 0
	266	Non-Residential	Large Commercial	Grocery	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0	8.0	\$125.0	205	0.11	0	0	0.00	. 0
	267	Non-Residential	Large Commercial	Hotel/Motel	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0		\$125.0	171	0.05	0	0	0.00	. 0
	268	Non-Residential	Large Commercial	Medical	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0	8.0	\$125.0	158	0.09	0	0	0.00	. 0
	269	Non-Residential	Large Commercial	Miscellaneous	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0	8.0	\$125.0	172	0.09	0	0	0.00	. 0
	270	Non-Residential	Large Commercial	Office	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0		\$125.0	132	0.09	0	0	0.00	
	271	Non-Residential	Large Commercial	Restaurant	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0			186	0.09	0	0	0.00	
	272	Non-Residential	Large Commercial	Retail/Service	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0	8.0		150	0.11	0	0	0.00	0
	273		Large Commercial		Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0		\$125.0	98	0.05	0	0	0.00	
	274	Non-Residential	Large Commercial	Warehouse	Lighting	Occupancy Sensor: Ceiling/Wall Mount (Remote)	per control	RET	8.0			129	0.09	0	0	0.00	
	275	Non-Residential			Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0		\$67.0	42	0.03	0	0	0.00	
	276		Large Commercial		Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0		\$67.0	69	0.04	0	0	0.00	
	277	Non-Residential	Large Commercial	Hotel/Motel	Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0			57	0.02	0	0	0.00	
	278		Large Commercial		Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0		\$67.0	53	0.03	0	0	0.00	
	279		Large Commercial		Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0		\$67.0	58	0.03	0	0	0.00	
	280	Non-Residential	Large Commercial	Office	Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0		\$67.0	44	0.03	0	0	0.00	
	281	Non-Residential			Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0		\$67.0	63	0.03	0	0	0.00	
	282	Non-Residential	Large Commercial	Retail/Service	Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0		\$67.0	50	0.04	0	0	0.00	
	283		Large Commercial		Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0			33	0.02	0	0	0.00	
	284	Non-Residential			Lighting	Occupancy Sensor: Fixture Mounted (High Bay)	per control	RET	8.0		\$67.0	43	0.03	0	0	0.00	
	285		Large Commercial		Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0		\$55.0	42	0.03	0	0	0.00	
	286	Non-Residential			Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0			69	0.04	0	0	0.00	
	287	Non-Residential			Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0		\$55.0	57	0.02	0	0	0.00	
	288		Large Commercial		Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0		\$55.0	53	0.03	0	0	0.00	
	289		Large Commercial		Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0		\$55.0	58	0.03	0	0	0.00	
	290	Non-Residential			Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0		\$55.0	44	0.03	0	0	0.00	
	291		Large Commercial		Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0		\$55.0	63	0.03	0	0	0.00	
	292	Non-Residential			Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0			50	0.04	0	0	0.00	
	293	Non-Residential			Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0		\$55.0	33	0.02	0	0	0.00	
	294		Large Commercial		Lighting	Occupancy Sensor: Wall Switch Replacement	per control	RET	8.0		\$55.0	43	0.03	0	0	0.00	
	295		Small Commercial		Lighting	Small Business Occupancy Sensor	per control	RET	8.0		\$217.7	163	0.00	0	0	0.00	
	296	Non-Residential			Lighting	Lighting Density Reduction, Building Method	per building	NEW	2.0		\$370,731.1	88711	20.95	0	0	0.00	
	297		Large Commercial		Lighting	Lighting Density Reduction, Building Method	per building	NEW	2.0		\$79,108.2	42601	7.18	0	0	0.00	
	298				Lighting	Lighting Density Reduction, Building Method	per building	NEW	2.0			53708	5.26	0	0	0.00	
	299		Large Commercial		Lighting	Lighting Density Reduction, Building Method	per building	NEW	2.0		\$248,133.5	88110	15.45	0	0	0.00	
- 1	300	Non-Residential	Large Commercial	wiscellaneous	Lighting	Lighting Density Reduction, Building Method	per building	NEW	2.0	11.0	\$249,630.4	81592	15.27	0	0	0.00	l ol

Measur							Retrofit (RET), Replace-on-		Efficient Unit	Total	Annual kWh	Annual kW	Annual Gas	Annual kWh	Annual kW	Annual Gas
ID	Sector	Sub-Sector	Building Type	End Use	Measure Name	Measure Unit Name		Lifetime	Lifetime	Incremental	Savings	Coincident	Savings	Increases	Coincident Peak	
001			0.00	C C C C			Construction (NEW)	(Years)	(Years)	Cost	,	Peak Savings	(Therms)		Increases	Increase
301	Non-Residential			Lighting	Lighting Density Reduction, Building Method	per building	NEW	2.0	11.0	\$199,222.9	68083	17.18	0	0	0.00	
302	Non-Residential			Lighting	Lighting Density Reduction, Building Method	per building	NEW NEW	2.0	11.0	\$7,031.8 \$43.605.6	2945	0.60	0	0	0.00	
303	Non-Residential			Lighting	Lighting Density Reduction, Building Method	per building		2.0	11.0		14689	3.91	0	0		
304	Non-Residential			Lighting	Lighting Density Reduction, Building Method	per building	NEW	2.0	11.0	\$130,018.8	24154	5.01	0	0	0.00	
305	Non-Residential			Lighting	Lighting Density Reduction, Building Method	per building	NEW	2.0	11.0	\$91,493.1	14893	4.00	0	0	0.00	
306	Non-Residential			Lighting	Lighting Density Reduction, Space Method	per building	NEW	2.0	11.0	\$83,180.8	20380	5.36	0	0	0.00	
307	Non-Residential			Lighting	Lighting Density Reduction, Space Method	per building	NEW	2.0	11.0	\$413,229.8	280471	43.87		0	0.00	
308	Non-Residential		General Livestock	Lighting	Outdoor Lighting	per building	RET	2.0	15.0	\$346.0	531	0.00	0	0	0.00	
309	Non-Residential		Poultry	Lighting	A19 LED Poultry	per building	RET	2.0	15.0	\$2,442.4	44142	6.43	0	0	0.00	
310	Non-Residential			Lighting	Small Business Abandoned Fluorescent	per bulb	ROB	5.5	5.5	\$23.0	299	0.14	0	0	0.00	
311				Lighting	Small Business Abandoned Fluorescent	per bulb	ROB	5.5	5.5	\$23.0	675	0.17	0	0	0.00	
312	Non-Residential			Lighting	Small Business Abandoned Fluorescent	per bulb	ROB	5.5	5.5	\$23.0	356	0.15	0	0	0.00	
313	Non-Residential			Lighting	Small Business Abandoned Fluorescent	per bulb	ROB	5.5	5.5	\$23.0	553	0.24	0	0	0.00	
314	Non-Residential			Lighting	Small Business Abandoned Fluorescent	per bulb	ROB	5.5	5.5	\$23.0	360	0.12	0	0	0.00	
315				Lighting	Small Business Abandoned HID	per bulb	ROB	5.5	5.5	\$23.0	946	0.31	0	0	0.00	
316	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.01	0	0	0.00	
317	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.02	0	0	0.00	
318	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.01	0	0	0.00	
319	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.02		0	0.00	
320	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.02	0	0	0.00	
321	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.02	0	0	0.00	
322	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.02	0	0	0.00	
323	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.02	0	0	0.00	
324	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.01	0	0	0.00	
325	Non-Residential			Lighting	LED Exit Signs	per sign	RET	11.0	11.0	\$25.0	151	0.02	0	0	0.00	
326				Lighting	Small Business LED Exit Signs	per sign	RET	16.0	16.0	\$77.1	130	0.01	0	0	0.00	
327				Lighting	Small Business LED Exit Signs	per sign	RET	16.0	16.0	\$91.3	154	0.01	0	0	0.00	
328				Lighting	Small Business LED Exit Signs	per sign	RET	16.0	16.0	\$82.0	139	0.02	0	0	0.00	
329				Lighting	Small Business LED Exit Signs	per sign	RET	16.0	16.0	\$63.7	108	0.01	0	0	0.00	
330	Non-Residential		Warehouse	Lighting	Small Business LED Exit Signs	per sign	RET	16.0	16.0	\$87.2	148	0.01	0	0	0.00	
331	Non-Residential		School (K-12)	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	266	0.05	5	0	0.00	
332			College/University	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	343	0.08			0.00	
333			Restaurant	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	661	0.10	13	0	0.00	
334	Non-Residential		Medical	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	549	0.09	3	0	0.00	
335	Non-Residential		Hotel/Motel	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	635	0.09	12	0	0.00	
336	Non-Residential		Office	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	358	0.09	8	0	0.00	
337	Non-Residential		Retail/Service	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	461	0.10	8		0.00	
338	1 ton 1 tooldentide		Warehouse	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	437	0.10	6	0	0.00	
339	Non-Residential		Miscellaneous	Lighting	Solar Light Tubes	per light tube	RET	10.0	10.0	\$500.0	417	0.08	9		0.00	
340	Non-Residential		Swine	Lighting	A19 LED Swine	per building	RET RET	2.0	15.0 8.0	\$4,304.0	63624 24	5.59 0.00	0	0	0.00	
341	Non-Residential		All	Miscellaneous	Power Strip with Occupancy Sensor	per strip	RET	8.0	8.0	\$50.0	159		0	0	0.00	
342	Non-Residential		Office	Miscellaneous	Computer Power Management - Monitor	per monitor	RET	4.0	4.0	\$12.5 \$12.5	159 338	0.01 0.02	0	0	0.00	
343	1 ton 1 tooladina		Office	Miscellaneous	Computer Power Management - Desktop	per desktop	RET	4.0	4.0	\$12.5 \$12.5	97	0.02			0.00	
344	Non-Residential		Office	Miscellaneous	Computer Power Management - Laptop	per laptop		6.7	6.7							
345	Non-Residential		Miscellaneous	Miscellaneous	Compressed Air Controller, Pressure/Flow Controller; >15 HP	per hp	RET			\$316.0	385	0.13	0	0	0.00	
346	1 ton 1 tooldentide		Miscellaneous	Miscellaneous	Compressed Air Controller, Pressure/Flow Controller; ≤ 15 HP	per hp	RET	6.7	6.7	\$439.1	465	0.16	0	0	0.00	
347	Non-Residential		Miscellaneous	Miscellaneous	VFD Air Compressors; > 15 HP	per hp	ROB	6.7	6.7	\$222.3	385	0.13	0	0	0.00	
348	Non-Residential		Miscellaneous All	Miscellaneous	VFD Air Compressors; ≤ 15 HP	per hp	ROB	6.7	6.7	\$364.7	465	0.16		0	0.00	
349	Non-Residential		All	Miscellaneous	Commercial Clothes Dryer Moisture Sensor	per machine	RET	14.0	14.0	\$600.0	577 87	0.11	541	0	0.00	
350 351	1 ton 1 tooldentide		ΔII	Miscellaneous	Clothes Washers - Electric Water Heater	per washer	ROB ROB	7.0	7.0 7.0	\$250.0 \$250.0	87	0.12 0.12	0	0	0.00	
	Non-Residential		All	Miscellaneous	Clothes Washers - Heat Pump Water Heater	per washer		7.0			87		0	0		
352	1 ton 1 tooldentide		All	Miscellaneous	Clothes Washers - Non-Electric Water Heater	per washer	ROB	7.0	7.0	\$250.0		0.12	0	0	0.00	
353	Non-Residential			Miscellaneous	Large Commercial Building 10% better than applicable code	per building	NEW	15.0	15.0	\$36,768.0	132429	13.60	0	0	0.00	
354			All	Miscellaneous	Small Commercial Building 10% better than applicable code	per building	NEW	15.0	15.0	\$1,479.0	5574	0.44	0	(I °	0.00	
355	Non-Residential		All	Miscellaneous	Large Commercial Building Retro-Commissioning	per building	RET RET	10.0	10.0	\$32,679.7	185710	15.84	1 0		0.00	
356			All	Miscellaneous	Small Commercial Building Retro-Commissioning	per building		12.0	12.0	\$15,686.3	67642	5.00	1 0		0.00	
357			Hotel/Motel	Miscellaneous	Energy Management System	per building	RET	10.0	10.0	\$106,222.0	449122	0.00		<u>'</u>	0.00	
358	Non-Residential		Office	Miscellaneous	Energy Management System	per building	RET	10.0	10.0	\$104,712.0	373968	50.00	0	<u>°</u>	0.00	
359	Non-Residential		Retail/Service	Miscellaneous	Energy Management System	per building	RET	10.0	10.0	\$5,566.0	19878	0.00	0	<u>°</u>	0.00	
360	Non-Residential	Agricultural	Irrigation	Miscellaneous	EndSuction Pump 0.75 HP	per customer	ROB	15.0	15.0	\$485.9	714	0.09	1 0	0 ار	0.00	0

Measure	_			End Use		Measure Unit Name	Retrofit (RET), Replace-on-	Baseline Unit	Efficient Unit	Total	Annual kWh	Annual kW	Annual Gas	Annual kWh	Annual kW	Annual Gas
ID	Sector	Sub-Sector	Sub-Sector Building Type		Measure Name			Lifetime	Lifetime	Incremental	Savings	Coincident	Savings	Increases	Coincident Peak	
							Construction (NEW)	(Years)	(Years)	Cost		Peak Savings	(Therms)	moreases	Increases	Increase
361	Non-Residential	Agricultural	Irrigation	Miscellaneous	EndSuction Pump 2 HP	per customer	ROB	15.0	15.0	\$590.5	1903	0.24	0	0	0.00	
362	Non-Residential	Agricultural	Irrigation	Miscellaneous	Pump Tune-up 60 HP	per customer	RET	5.0	5.0	\$38,400.0	122073	18.56	0	0	0.00	
363	Non-Residential		Irrigation	Miscellaneous	Submersible Boost Pump 1 HP	per customer	ROB	15.0			1167	0.15	0	0	0.00	
364		Agricultural	Irrigation	Miscellaneous	Submersible Boost Pump 5 HP	per customer	ROB	15.0			5837	0.74	0	0	0.00	
365	Non-Residential		Medical	Miscellaneous	Pump Tune-up < 40 HP	per hp	RET RET	8.0			500 167	0.03	0	0	0.00	
366	Non-Residential		Office	Miscellaneous	Pump Tune-up < 40 HP	per hp		8.0			167	0.03	0	0	0.00	
367	Non-Residential		School (K-12)	Miscellaneous	Pump Tune-up < 40 HP	per hp	RET	8.0		\$130.0		0.03	U	0	0.00	
368	Non-Residential	Agricultural	Irrigation	Miscellaneous	Low Pressure Irrigation System	per customer	RET	10.0			95305	30.56	0	0	0.00	
369	Non-Residential	All	All	Miscellaneous	ENERGY STAR Pool Pump	per pump	ROB	10.0			3729	1.12	0	0	0.00	
370	Non-Residential	Large Commercial		Refrigeration	Door Gaskets for Walk-in and Reach-in Freezers	per linear foot	RET	4.0		\$9.6	115 15	0.01	0	0	0.00	
371	Non-Residential	Large Commercial		Refrigeration	Door Gaskets for Walk-in and Reach-in Coolers	per linear foot	RET RET	4.0		\$9.6	15 689	0.00	0	0	0.00	
372	Non-Residential	Large Commercial		Refrigeration	Anti-Sweat Heater Controls - Cooler Doors	per door	RET	12.0			1320	0.06	0	0		
373	Non-Residential	Large Commercial		Refrigeration	Zero Energy Doors, Cooler	per door	RET	12.0 16.0			7724	0.15 0.66	0	0	0.00	
374		Small Commercial		Refrigeration	Small Business Cooler Door Heater Controls	per controller					7724 2498		0	0		
375		Small Commercial		Refrigeration	Small Business Cooler Door Heater Controls	per controller	RET	16.0				0.21	0	0	0.00	
376		Large Commercial		Refrigeration	Anti-Sweat Heater Controls - Freezer Doors	per door	RET	12.0			1206	0.10	0	0	0.00	
377		Large Commercial		Refrigeration	Zero Energy Doors, Freezer	per door	RET	12.0			2919	0.33	0	0	0.00	
378		Small Commercial		Refrigeration	Small Business Freezer Door Heater Controls	per controller	RET	16.0			1660	0.14	0	0	0.00	
379		Small Commercial		Refrigeration	Small Business Freezer Door Heater Controls	per controller	RET	16.0		\$871.2	537	0.05	U	0	0.00	
380		Large Commercial		Refrigeration	Electronically Commutated Motors for All Refrigeration	per motor	RET	10.0			477	0.04	0	0	0.00	
381		Small Commercial		Refrigeration	Small Business Other Controls & EC Motors - Large	per motor	RET	10.0		\$1,205.0	1184	0.00	0	0	0.00	
382		Small Commercial		Refrigeration	Small Business Other Controls & EC Motors - Large	per motor	RET	10.0			1069	0.00	0	0	0.00	
383		Small Commercial		Refrigeration	Small Business Other Controls & EC Motors - Medium	per motor	RET	10.0			935	0.00	0	0	0.00	
384		Small Commercial		Refrigeration	Small Business Other Controls & EC Motors - Medium	per motor	RET	10.0			1548	0.00	0	0	0.00	
385		Small Commercial		Refrigeration	Small Business Other Controls & EC Motors - Small	per motor	RET	10.0			591	0.07	0	0	0.00	
386		Small Commercial		Refrigeration	Small Business Other Controls & EC Motors - Small	per motor	RET	10.0			553	0.07	0	0	0.00	
387		Small Commercial		Refrigeration	Small Business Evaporative/Compressor Controls	per building	RET	16.0		\$3,136.0	5945	0.21	0	0	0.00	
388		Small Commercial		Refrigeration	Small Business Evaporative/Compressor Controls	per building	RET	16.0			3192	0.08	0	0	0.00	
389				Refrigeration	Batch Ice Machine, Ice Making Head	per machine	ROB	12.0			2278	0.37	0	0	0.00	
390				Refrigeration	Batch Ice Machine, Self-Contained	per machine	ROB	12.0			255	0.04	0	0	0.00	
391		Large Commercial		Refrigeration	Batch Ice Machine, Split System	per machine	ROB	12.0			1064	0.06	0	0	0.00	
392				Refrigeration	Continuous Ice Machine, Ice Making Head	per machine	ROB	12.0			5548	0.37	U	0	0.00	
393		Large Commercial		Refrigeration	Continuous Ice Machine, Self-Contained	per machine	ROB	12.0			1212	0.04	0	0	0.00	
394		Large Commercial		Refrigeration	Continuous Ice Machine, Split System	per machine	ROB	12.0			2249	0.06	0	0	0.00	
395				Refrigeration	LED Refrigeration Case Lighting	per door	RET	10.0			374	0.05	0	0	0.00	
396		Small Commercial		Refrigeration	Small Business LED Case Lights	per door	RET	10.0			686	0.09	0	0	0.00	
397		Small Commercial		Refrigeration	Small Business LED Case Lights	per door	RET	10.0			368	0.03	0	0	0.00	
398				Refrigeration	LED Refrigeration Case Lighting Controls	per door	RET	10.0		\$20.0	260	0.15	0	0	0.00	
399		Large Commercial		Refrigeration	Refrigeration Night Covers - Coolers	per foot	RET	10.0			126	0.00	0	0	0.00	
400				Refrigeration	Refrigeration Night Covers - Freezers	per foot	RET	10.0			169	0.00	0	0	0.00	
401	Non-Residential	Large Commercial		Refrigeration	Glass Door Reach-in Freezer; < 15 cubic feet	per freezer	ROB ROB	12.0			1602	0.18	0	0	0.00	
402		Large Commercial		Refrigeration	Glass Door Reach-in Freezer; ≥ 15 & < 30 cubic feet	per freezer	ROB	12.0			3185 5147	0.36	0	0	0.00	
403				Refrigeration	Glass Door Reach-in Freezer; ≥ 30 & < 50 cubic feet	per freezer	ROB	12.0			5147 7450	0.59	0	0	0.00	
404				Refrigeration	Glass Door Reach-in Freezer; ≥ 50 cubic feet	per freezer		12.0				0.85	U	0	0.00	
405		Large Commercial		Refrigeration	Reach-in Freezer; < 15 cubic feet	per freezer	ROB	12.0			485	0.06	0	0	0.00	
406	Non-Residential	Large Commercial		Refrigeration	Reach-in Freezer; ≥ 15 & < 30 cubic feet	per freezer	ROB	12.0			1343	0.15	0	0	0.00	
407		Large Commercial		Refrigeration	Reach-in Freezer; ≥ 30 & < 50 cubic feet	per freezer	ROB	12.0			2402	0.27	0	0	0.00	
408		Large Commercial		Refrigeration	Reach-in Freezer; ≥ 50 cubic feet	per freezer	ROB	12.0			4183	0.48	0	0	0.00	
409				Refrigeration	Glass Door Reach-in Refrigerator; < 15 cubic feet	per fridge	ROB	12.0			725	0.08	0	0	0.00	
410				Refrigeration	Glass Door Reach-in Refrigerator; ≥ 15 & < 30 cubic feet	per fridge	ROB	12.0			672	0.08	0	0	0.00	
411				Refrigeration	Glass Door Reach-in Refrigerator; ≥ 30 & < 50 cubic feet	per fridge	ROB	12.0			734	0.08	0	0	0.00	
412	Non-Residential	Large Commercial		Refrigeration	Glass Door Reach-in Refrigerator; ≥ 50 cubic feet	per fridge	ROB	12.0			945	0.11	0	0	0.00	
413				Refrigeration	Reach-in Refrigerator; < 15 cubic feet	per fridge	ROB	12.0			453	0.05	0	0	0.00	
414	Non-Residential	Large Commercial		Refrigeration	Reach-in Refrigerator; ≥ 15 & < 30 cubic feet	per fridge	ROB	12.0			628	0.07	0	0	0.00	
415	Non-Residential	Large Commercial		Refrigeration	Reach-in Refrigerator; ≥ 30 & < 50 cubic feet	per fridge	ROB	12.0			982	0.11	0	0	0.00	
416		Large Commercial		Refrigeration	Reach-in Refrigerator; ≥ 50 cubic feet	per fridge	ROB	12.0			1486	0.17	0	0	0.00	
417		Large Commercial		Refrigeration	Automatic Door Closer for Walk-In Coolers	per door	RET	8.0			1625	0.22	0	0	0.00	
418		Large Commercial		Refrigeration	Automatic Door Closer for Walk-In Freezers	per door	RET	8.0		\$156.0	1625	0.22	0	0	0.00	
419		Large Commercial		Refrigeration	High Speed Doors for Cold Storage Facilities	per sq. ft.	RET	12.0			968	0.11	0	0	0.00	
420	Non-Residential	Large Commercial	w/ Food Service	Refrigeration	Zero Energy Doors, Refrigerator	per door	RET	12.0	12.0	\$290.0	1400	0.16	0	0	0.00	4 0

	MEASURE DESCRIPTION	MEASURE SELECTION			APPLICABILITY								
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Program-Measure Inclusion (if Passed Measure Screening)	Total Sub- Sector Units	Measure Units per Sub-Sector Unit	Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
1	Cool Roofs	0.02	0	0									
2	Cool Roofs Cool Roofs	0.07 0.04	0	0									
4	Cool Roofs	0.04	0	0									
5	Cool Roofs	0.05	0	0									
6	Cool Roofs	0.05	0	0									
7	Cool Roofs	0.05	0	0									
8	Commercial Door Air Infiltration-1/8 inches	0.90	0	1	19,216	6.0	100.0%	26%	40.0%	100.0%	49%	100.0%	5,751
9	Commercial Door Air Infiltration-1/4 inches	1.82 3.63	1	1	19,216 19,216	6.0	100.0% 100.0%	26% 26%	30.0% 20.0%	100.0% 100.0%	49% 49%	100.0% 100.0%	
10	Commercial Door Air Infiltration-1/2 inches Commercial Door Air Infiltration-3/4 inches	3.63 5.44	1	1	19,216	6.0	100.0%	26%	20.0% 10.0%	100.0%	49% 49%	100.0%	
12	Air Infiltration Improvements	0.17	Ó	0	19,210	6.0	100.076	20%	10.0%	100.0%	4970	100.0%	1,430
13	Roof Deck Insulation	0.10	0	0									
14	Wall Insulation	2.49	1	1	33,489	2865.5	28.8%	100%	100.0%	100.0%	84%	100.0%	23,205,964
15	Window Awnings for East Facing Windows	0.03	0	0									
16	Window Film for East Facing Windows	1.68	1	1	33,489	429.8	28.8%	26%	100.0%	50.0%	49%	100.0%	258,377
17 18	Window Awnings for West Facing Windows Window Film for West Facing Windows	0.03 2.30	0	0	33,489	429.8	28.8%	26%	100.0%	50.0%	49%	100.0%	258,377
19	High-Efficiency Electric Combination Oven	7.11	1		52,705	1.0	27.6%	9%	100.0%	100.0%	49%	8.3%	256,377
20	High-Efficiency Electric Convection Oven	2.16	1	1	52,705	1.0	27.6%	64%	100.0%	100.0%	49%	8.3%	
21	ENERGY STAR Dishwasher, Elec Heat, High Temp	5.37	i i	i i	52,705	1.0	27.6%	38%	50.0%	50.0%	33%	6.7%	30
22	ENERGY STAR Dishwasher, Elec Heat, Low Temp	27.81	1	1	52,705	1.0	27.6%	38%	50.0%	50.0%	33%	6.3%	28
23	High-Efficiency Electric Fryer	2.29	1	1	52,705	1.0	27.6%	45%	100.0%	100.0%	33%	8.3%	180
24	Electric Griddle	2.16	1	1	52,705	1.0	27.6%	36%	100.0%	100.0%	33%	8.3%	144
25	3/4 Size Insulated Hot Holding Cabinet	2.55	1	1	52,705	1.0	27.6%	12%	33.3%	100.0%	33%	8.3%	16
26	Full Size Insulated Hot Holding Cabinet	3.80	1	1	52,705	1.0	27.6%	12%	33.3%	100.0%	33%	8.3%	16
27	Half Size Insulated Hot Holding Cabinet	2.15 39.85	1	1	52,705 52,705	1.0	27.6%	12%	33.3%	100.0%	33%	8.3%	16
28 29	Low-Flow Pre-Rinse Spray Valves Steam Cooker, 3 Pan	39.85 4.32	1	1	52,705	1.0	27.6% 27.6%	38%	100.0% 25.0%	100.0% 100.0%	33% 50%	100.0%	1,806
30	Steam Cooker, 3 Pan Steam Cooker, 4 Pan	4.65	1	1	52,705	1.0 1.0	27.6%	21% 21%	25.0%	100.0%	50%	8.3% 8.3%	32 32
31	Steam Cooker, 5 Pan	5.00	1	1	52,705	1.0	27.6%	21%	25.0%	100.0%	50%	8.3%	32
32	Steam Cooker, 6 Pan	5.35	1	1	52,705	1.0	27.6%	21%	25.0%	100.0%	50%	8.3%	32
33	Air Cooled Chiller, Single Speed w/ Condenser; < 150 tons, greater than 10.2EEF	1.94	1	1	19,216	57.4	100.0%	25%	50.0%	36.4%	83%	5.0%	2,075
34	Air Cooled Chiller, Single Speed w/ Condenser≥ 150 tons, greater than 10.2EER	1.94	1	1	19,216	57.4	100.0%	25%	50.0%	29.5%	83%	5.0%	1,684
35	Air Cooled Chiller, VFD w/ Condenser; < 150 tons	1.98	1	1	19,216	57.4	100.0%	25%	50.0%	37.4%	83%	5.0%	2,134
36	Air Cooled Chiller, VFD w/ Condenser≥ 150 tons	1.98	1	1	19,216	57.4	100.0%	25%	50.0%	30.4%	83%	5.0%	1,731
37	Electronically Commutated Motors for HVAC Applications - SP Replacement	1.25	1	1	52,705	2.0	100.0%	89%	100.0%	100.0%	82%	100.0%	76,643
38 39	Electronically Commutated Motors for HVAC Applications - PSC Replacement Economizer Repair; AC/-	0.43 0.38	0	0									
40	Economizer Repair, AC/-	0.38	0	0									
41	Economizer Repair; AC/-	0.71	0	0									
42	Economizer Repair; AC/-	0.74	0	0									
43	Economizer Repair; AC/-	0.36	0	0									
44	Economizer Repair; AC/-	0.16	0	0									
45 46	Economizer Repair; AC/-	0.18 0.18	0	0									
47	Economizer Repair; AC/- Economizer Repair; AC/-	0.18	0	0									
48	Economizer Repair, AC/Gas	0.44	0	0									
49	Economizer Repair; AC/Gas	0.02	0	0									
50	Economizer Repair; AC/Gas	0.86	0	1	52,705	30.7	1.5%	12%	100.0%	100.0%	65%	100.0%	1,867
51	Economizer Repair; AC/Gas	1.05	1	1	52,705	11.0	2.1%	13%	100.0%	100.0%	65%	100.0%	1,034
52 53	Economizer Repair; AC/Gas Economizer Repair; AC/Gas	0.47 0.17	0	0									
54	Economizer Repair, AC/Gas Economizer Repair, AC/Gas	0.17	0	0									
55	Economizer Repair; AC/Gas	0.27	0	0									
56	Economizer Repair; AC/Gas	0.27	0	0							1		
57	Economizer Repair; HP	0.77	0	1	52,705	21.0	1.2%	44%	100.0%	100.0%	65%	100.0%	3,733
58	Economizer Repair; HP	0.04	0	0							1		
59	Economizer Repair; HP	1.09	1	1	52,705	30.7	1.5%	44%	100.0%	100.0%	65%	100.0%	6,969
60 61	Economizer Repair; HP	1.49	1	1	52,705 52,705	11.0 11.1	2.1% 27.2%	58% 51%	100.0% 100.0%	100.0% 100.0%	65% 65%	100.0%	4,550
62	Economizer Repair; HP Economizer Repair; HP	0.69	0	0	52,705	11.3	21.270	51%	100.0%	100.0%	03%	100.0%	52,648
63	Economizer Repair; HP	0.45	0	0							1		
64	Economizer Repair; HP	0.34	0	0							1		
65	Economizer Repair; HP	0.33	0	0							1		
66	Air-Source Heat Pump, Tier 1; < 5.4 tons, greater than 14.0 SEER & 11.6 EER	1.21	1	1	52,705	57.4	100.0%	22%	25.0%	37.6%	83%	6.7%	3,388
67 68	Air-Source Heat Pump, Tier 1;≥ 5.4 tons & < 20 tons, greater than 11.5 SEER &	1 12.55	1	1	52,705 52,705	57.4 57.4	100.0%	22% 22%	25.0% 25.0%	49.9% 37.6%	83% 83%	6.7% 6.7%	4,489 3,385
68	Air-Source Heat Pump, Tier 1;≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & Air-Source Heat Pump, Tier 1;≥ 63.3 tons, greater than 10.2 SEER & 10.3 EER	1.19 0.96	0	1	52,705 52,705	57.4 57.4	100.0%	22% 22%	25.0% 25.0%	37.6% 34.7%	83%	6.7%	3,385 3,123
70	Air-Source Heat Pump, Tier 1; 2 63.3 tons, greater than 10.2 SEER & 10.3 EER Air-Source Heat Pump, Tier 2; < 5.4 tons, greater than 15.0 SEER & 12.0 EER	1.62	1	1	52,705	57.4	100.0%	22%	25.0%	62.4%	83%	6.7%	5,614
71	Air-Source Heat Pump, Tier 2; < 5.4 tons & < 20 tons, greater than 12.0 SEER & 12.0 SEER	1 13.08	1	1 1	52,705	57.4	100.0%	22%	25.0%	50.1%	83%	6.7%	4,514
72	Air-Source Heat Pump, Tier 2;≥ 20 tons & < 63.3 tons, greater than 10.3 SEER &		1	1	52,705	57.4	100.0%	22%	25.0%	62.4%	83%	6.7%	5,618
73	Air-Source Heat Pump, Tier 2;≥ 63.3 tons, greater than 9.7 SEER & 9.8 EER	1.28	1	1	52,705	57.4	100.0%	22%	25.0%	65.3%	83%	6.7%	5,880
74	Commercial Kitchen Demand Hood Controls	1.57	1	1	52,705	6.5	1.2%	30%	100.0%	100.0%	96%	100.0%	1,145
75	Commercial Kitchen Demand Hood Controls	3.47	1	1	52,705	6.5	1.5%	30%	100.0%	100.0%	96%	100.0%	1,464
76	Commercial Kitchen Demand Hood Controls	2.54	1	1	52,705	6.5	3.1%	69%	100.0%	100.0%	96%	100.0%	7,029
77	Commercial Kitchen Demand Hood Controls	1.13	1	1	52,705	6.5	3.6%	30%	100.0%	100.0%	96%	100.0%	3,497

	_	-	• •	•
able its				
051 070 667 189 243 938 721 696 319 582 662 881 486 520 616 709 826 464 372 489 721				
696 233 113				
828 292 260				
699 288 260				
820 231				
483 0 663 333 3147 47 11 0 561 68 23 113 26 0 561 68 23 113 26 587 963 592 665 792 467				
15 799				
748 689 802 827 003 996 778 271				
				1

ELECTRONICALLY FILED - 2019 October 2 1:00 PM - SCPSC - Docket # 2019-239-E

Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Program-Measure Inclusion (if Passed Measure Screening)	Total Sub- Sector Units	Measure Units per Sub-Sector Unit	Applicability		Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
78	Occupancy-Based PTAC/PTHP Controls	1.09	1	1	52.705	11400.0	1.5%	26%	100.0%	100.0%	99%	100.0%	1.141.051
79	Occupancy-Based PTAC/PTHP Controls	1.09	1	1	52,705	11400.0	1.5%	26%	100.0%	100.0%	99%	6.7%	76,070
80	Occupancy-Based PTAC/PTHP Controls	1.09	1	1	685	11400.0	1.5%	26%	100.0%	100.0%	99%	100.0%	29,667
81	Packaged Terminal AC; < 0.75 tons, greater than 14.0 EER	3.59	1	1	52,705	57.4	100.0%	10%	33.3%	73.5%	83%	6.7%	4,189
82	Packaged Terminal AC;≥ 0.75 tons & < 1.00 ton, greater than 14.0 EER	3.50	1	1	52,705	57.4	100.0%	10%	33.3%	74.4%	83%	6.7%	4,243
83 84	Packaged Terminal AC;≥ 1.00 ton, greater than 14.0 EER	1.38 1.40	1	1	52,705 52,705	57.4 57.4	100.0% 100.0%	10% 5%	33.3% 33.3%	51.5% 26.5%	83% 83%	6.7% 6.7%	2,938 721
85 85	Packaged Terminal HP; < 0.75 tons, greater than 11.8 EER Packaged Terminal HP;≥ 0.75 tons & < 1.0, greater than 11.0 EER	1.40	1	1	52,705 52,705	57.4 57.4	100.0%	5%	33.3%	25.5%	83%	6.7%	721 696
86	Packaged Terminal HP;≥ 1.0, greater than 10.3 EER	1.34	1	1	52,705	57.4	100.0%	5%	33.3%	48.5%	83%	6.7%	1,319
87	Small Business Duct Efficiency Improvements - AC/Gas	9.39	1	1	33,489		28.8%	12%	100.0%	100.0%	52%	100.0%	582
88	Small Business Duct Efficiency Improvements - AC/ER	6.11	1	1	33,489	1.0	28.8%	13%	100.0%	100.0%	52%	100.0%	662
89	Small Business Duct Efficiency Improvements - HP	10.69	1	1	33,489	1.0	28.8%	38%	100.0%	100.0%	52%	100.0%	1,881
90	Small Business AC Tune-up; < 5.4 tons	1.73	1	1	33,489	45.4	100.0%	51%	31.3%	100.0%	100%	100.0%	243,486
91 92	Small Business AC Tune-up;≥ 5.4 tons & < 11.25 tons Small Business AC Tune-up;≥ 11.25 tons	1.86 2.04	1	1	33,489 33,489	45.4 45.4	100.0% 100.0%	51% 51%	36.6% 30.1%	100.0% 100.0%	100% 100%	100.0% 100.0%	284,520 233.616
92	Small Business HP Tune-up; < 5.4 tons	3.89	1	1	33,489	45.4 45.4	100.0%	38%	31.3%	100.0%	100%	100.0%	178.709
94	Small Business HP Tune-up;≥ 5.4 tons & < 11.25 tons	3.44	1	1	33,489	45.4	100.0%	38%	36.6%	100.0%	100%	100.0%	208,826
95	Small Business HP Tune-up;≥ 11.25 tons	3.69	1	1	33,489	45.4	100.0%	38%	30.1%	100.0%	100%	100.0%	171,464
96	Small Business Smart T-stats , AC & ER Heat	7.64	1	1	33,489	45.4	100.0%	13%	100.0%	100.0%	97%	100.0%	195,372
97	Small Business Smart T-stats, AC & Gas Heat	7.77	1	1	33,489	45.4	100.0%	12%	100.0%	100.0%	97%	100.0%	171,489
98	Small Business Smart T-stats, HP	3.58	1	1	33,489	45.4	100.0%	38%	100.0%	100.0%	97%	100.0%	554,721
99 100	Split System, Tier 1; < 5.4 tons, greater than 14.0 SEER & 12.0 EER Split System, Tier 1; ≥ 5.4 tons & < 20 tons, greater than 11.5 SEER & 11.7 EER	1.15 0.28	1 0	1 0	52,705	57.4	100.0%	49%	25.0%	60.5%	83%	6.7%	12,412
100	Split System, Fier 1;≥ 5.4 tons & < 20 tons, greater than 11.5 SEER & 11.7 EER Split System, Tier 1;≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & 10.3 EEF	0.20	1	1	52 705	57.4	100.0%	49%	25.0%	27.8%	83%	6.7%	5 696
102	Split System, Tier 1;≥ 63.3 tons, greater than 10.2 SEER & 10.3 EER	1.46	1	1	52,705	57.4	100.0%	49%	25.0%	45.0%	83%	6.7%	9,233
103	Split System, Tier 2; < 5.4 tons, greater than 15.0 SEER & 12.5 EER	1.04	1	1	52,705	57.4	100.0%	49%	25.0%	39.5%	83%	6.7%	8,113
104	Split System, Tier 2; ≥ 5.4 tons & < 20 tons, greater than 12.0 SEER & 12.2 EER	0.37	0	0									
105	Split System, Tier 2;≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & 10.6 EEF	2.45	1	1	52,705	57.4	100.0%	49%	25.0%	72.2%	83%	6.7%	14,828
106	Split System, Tier 2;≥ 63.3 tons, greater than 9.7 SEER & 9.8 EER	1.96	1	1	52,705	57.4	100.0%	49%	25.0%	55.0%	83%	6.7%	11,292
107 108	Unitary AC, Tier 1; < 5.4 tons, greater than 14.0 SEER & 11.6 EER Unitary AC, Tier 1; ≥ 5.4 tons & < 20 tons, greater than 11.5 SEER & 11.7 EER	1.15 0.28	1 0	1 0	52,705	57.4	100.0%	6%	25.0%	50.0%	83%	6.7%	1,260
109	Unitary AC, Tier 1,≥ 20 tons & < 63.3 tons, greater than 11.3 SEER & 11.7 EER	1.26	1	1	52 705	57.4	100.0%	6%	25.0%	27.8%	83%	6.7%	699
110	Unitary AC, Tier 1;≥ 63.3 tons, greater than 10.2 SEER & 10.3 EER	1.46	1	1	52,705	57.4	100.0%	6%	25.0%	51.1%	83%	6.7%	1,288
111	Unitary AC, Tier 2; < 5.4 tons, greater than 15.0 SEER & 12.0 EER	1.15	1	1	52,705	57.4	100.0%	6%	25.0%	50.0%	83%	6.7%	1,260
112	Unitary AC, Tier 2;≥ 5.4 tons & < 20 tons, greater than 12.0 SEER & 12.2 EER	0.37	0	0									
113	Unitary AC, Tier 2;≥ 20 tons & < 63.3 tons, greater than 10.3 SEER & 10.6 EER	2.45	1	1	52,705	57.4	100.0%	6%	25.0%	72.2%	83%	6.7%	1,820
114 115	Unitary AC, Tier 2;≥ 63.3 tons, greater than 9.7 SEER & 9.8 EER Ventilation Fan. Retrofit: 36-47"	1.42 0.48	1	1	52,705	57.4	100.0%	6%	25.0%	48.9%	83%	6.7%	1,231
115	Ventilation Fan, Retrofit; 36-47" Ventilation Fan, Retrofit; 48-61"	0.48	0	1	1.138	1.0	42.4%	100%	100.0%	100.0%	100%	100.0%	483
117	VED Fan	2.94	1	1	52 705	2.3	2.1%	0%	100.0%	100.0%	0%	10.0%	1 0
118	VFD Fan	1.34	1	1	52,705	2.3	27.2%	21%	100.0%	100.0%	100%	10.0%	663
119	VFD Fan	2.16	1	1	52,705	2.3	3.1%	91%	100.0%	100.0%	100%	10.0%	333
120	VFD Fan	1.73	1	1	52,705	2.3	5.3%	24%	100.0%	100.0%	96%	10.0%	147
121	VFD Fan	1.30	1	1	52,705	2.3	3.6%	21%	100.0%	100.0%	52%	10.0%	47
122 123	VFD Pump. Chilled Water	1.66 4.82	1	1	52,705 52,705	2.3 2.3	0.8%	21% 50%	100.0%	100.0% 100.0%	52% 0%	10.0%	11
123	VFD Pump, Chilled Water VFD Pump, Chilled Water	4.82 2.21	1	1	52,705 52,705	2.3	2.1%	79%	100.0%	100.0%	100%	10.0%	2,561
125	VFD Pump. Chilled Water	3.55	1	1	52,705	2.3	3.1%	18%	100.0%	100.0%	100%	10.0%	2,301
126	VFD Pump, Chilled Water	2.86	1	1	52,705	2.3	5.3%	4%	100.0%	100.0%	96%	10.0%	23
127	VFD Pump, Chilled Water	2.15	1	1	52,705	2.3	3.6%	51%	100.0%	100.0%	52%	10.0%	113
128	VFD Pump, Chilled Water	2.73	1	1	52,705	2.3	0.8%	51%	100.0%	100.0%	52%	10.0%	26
129	VFD Pump, Hot Water	4.04	1	1	52,705	2.3	2.1%	50%	100.0%	100.0%	0%	10.0%	0
130	VFD Pump, Hot Water VFD Pump, Hot Water	1.35 2.74	1	1	52,705	2.3	27.2% 3.1%	79% 18%	100.0%	100.0% 100.0%	100%	10.0%	2,561
131 132	VFD Pump, Hot Water VFD Pump. Hot Water	2.74	1	1	52,705 52,705	2.3 2.3	3.1% 5.3%	18%	100.0% 100.0%	100.0%	100% 96%	10.0%	68 23
133	VFD Pump, Hot Water	1.30	1	1	52,705	2.3	3.6%	51%	100.0%	100.0%	52%	10.0%	113
134	VFD Pump, Hot Water	1.90	1	1	52,705	2.3	0.8%	51%	100.0%	100.0%	52%	10.0%	26
135	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	3.70	1	1	52,705	21.0	1.2%	82%	100.0%	100.0%	83%	6.7%	587
136	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	3.70	1	1	52,705	39.5	0.9%	90%	100.0%	100.0%	83%	6.7%	963
137	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	2.53	1	1	52,705	38.3	1.5%	82%	100.0%	100.0%	83%	6.7%	1,365
138	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	3.98	1	1	52,705	21.0	3.6%	82%	100.0%	100.0%	83%	6.7%	1,792
139 140	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency	3.75 3.53	1	1	52,705 52,705	11.0 12.3	2.1% 27.2%	100% 93%	100.0% 100.0%	100.0% 100.0%	83% 83%	6.7% 6.7%	665 9,095
140	Variable Refrigerant Flow HVAC; 10% greater than baseline efficiency Variable Refrigerant Flow HVAC: 10% greater than baseline efficiency	3.53	1	1	52,705	12.3 19.1	3.1%	100%	100.0%	100.0%	83%	6.7%	1,724
141	Variable Refrigerant Flow HVAC: 10% greater than baseline efficiency	3.96	1	1	52,705	10.4	5.3%	90%	100.0%	100.0%	83%	6.7%	1,467
143	Water Cooled Centrifugal Chiller, Single Speed; < 300 tons, greater than 0.59 kW		0	0	32,.00	.5.4	2.370	00,3	.55.576		3370	5.770	1,300
144	Water Cooled Centrifugal Chiller, Single Speed≥ 300 & < 600 tons, greater than 0	0.52	0	1	19,216	57.4	100.0%	25%	33.3%	0.4%	83%	5.0%	15
145	Water Cooled Centrifugal Chiller, Single Speed≥ 600 tons, greater than 0.55 kW/l	1.40	1	1	19,216	57.4	100.0%	25%	33.3%	47.3%	83%	5.0%	1,799
146	Water Cooled Chiller, Single Speed; < 150 tons, greater than 0.71 kW/ton & 0.56	0.41	0	0	40.0		400.007	050/	00.55	40.70/	0000		7.0
147 148	Water Cooled Chiller, Single Speed≥ 150 & < 300 tons, greater than 0.58 kW/ton Water Cooled Chiller, Single Speed≥ 300 tons, greater than 0.56 kW/ton & 0.47 I		1	1	19,216 19,216	57.4 57.4	100.0%	25% 25%	33.3% 33.3%	19.7% 44.4%	83% 83%	5.0% 5.0%	748 1,689
148	Water Cooled Chiller, Single Speed2 300 tons, greater than 0.56 kW/ton & 0.47 I Water Cooled Centrifugal Chiller, VFD; < 300 tons, greater than 0.59 kW/ton & 0.	0.79	0	1	19,216	57.4 57.4	100.0%	25%	33.3%	44.4% 100.0%	83%	5.0%	3,802
150	Water Cooled Centrifugal Chiller, VFD≥ 300 & < 600 tons, greater than 0.58 kW/ton & 0		1	1	19,216	57.4	100.0%	25%	33.3%	21.7%	83%	5.0%	827
151	Water Cooled Centrifugal Chiller, VFD≥ 600 tons, greater than 0.57 kW/ton & 0.3	1.23	1	1	19,216	57.4	100.0%	25%	33.3%	52.7%	83%	5.0%	2,003
152	Water Cooled Chiller, VFD; < 150 tons, greater than 0.73 kW/ton & 0.54 IPLV	1.63	1	1	19,216	57.4	100.0%	25%	33.3%	26.2%	83%	5.0%	996
153	Water Cooled Chiller, VFD;≥ 150 & < 300 tons, greater than 0.61 kW/ton & 0.44 I		1	1	19,216	57.4	100.0%	25%	33.3%	20.5%	83%	5.0%	
154	Water Cooled Chiller, VFD;≥ 300 tons, greater than 0.58 kW/ton & 0.44 IPLV	1.46	1	1	19,216	57.4	100.0%	25%	33.3%	33.4%	83%	5.0%	1,271

Commercial Measures

- Page 106 of 133

		1		I									
Measure ID	Measure Name	Measure TRC	Passed Measure Screening? (1=Yes.	Program-Measure Inclusion (if Passed	Total Sub-	Measure Units per Sub-Sector	A !! b !!! to .	Technical	Distribution of Measure Permutation by Measure	Distribution of Measure Permutation by Efficiency	Not Yet	Annual Replacement	Total Applicable
Measure ID	measure name	calculated for 2020	0=No)	Measure Screening)	Sector Units	Der Sub-Sector Unit	Applicability	Feasibility	Size	Level	Adopted Rate	Eligibility	Measure Units
155	LED Tube 4' 2 lamp Egg collection	3.62	1	1	1,138	2.0	32.1%	100%	100.0%	100.0%	100%	100.0%	730
156	LED Tube 8' 2 lamp Egg collection	1.87	1	1	1,138	2.0	32.1%	100%	100.0%	100.0%	100%	100.0%	730
157	LED Tube 8' 2 lamp Egg storage (24hr)	2.79	1	1	1,138	2.0	32.1%	100%	100.0%	100.0%	100%	100.0%	
158	LED Pin-based Replacement Lamps	4.10	1	1	19,216	14.9	2.6%	100%	56.5%	100.0%	57%	100.0%	
159	LED Pin-based Replacement Lamps	5.45	1	1	19,216	14.9	1.2%	100%	56.5%	100.0%	57%	100.0%	1,113
160 161	LED Pin-based Replacement Lamps LED Pin-based Replacement Lamps	4.50 4.62	1	1	19,216 19,216	14.9 14.9	2.9% 3.2%	100% 100%	56.5% 56.5%	100.0% 100.0%	57% 72%	100.0% 100.0%	2,697 3,750
162	LED Pin-based Replacement Lamps	4.78	1	1	19,216	14.9	25.1%	100%	56.5%	100.0%	57%	100.0%	
163	LED Pin-based Replacement Lamps	4.28	1	1	19,216	14.9	45.5%	100%	56.5%	100.0%	50%	100.0%	
164	LED Pin-based Replacement Lamps	5.04	1	1	19,216	14.9	4.0%	100%	56.5%	100.0%	53%	100.0%	
165	LED Pin-based Replacement Lamps	4.69	1	1	19,216	14.9	7.1%	100%	56.5%	100.0%	65%	100.0%	
166	LED Pin-based Replacement Lamps	3.46	1	1	19,216	14.9	6.3%	100%	56.5%	100.0%	57%	100.0%	5,817
167	LED Pin-based Replacement Lamps	4.28	1	1	19,216	14.9	2.1%	100%	56.5%	100.0%	57%	100.0%	1,915
168 169	LED Screw-Base Replacement for HID Lamps	4.10 5.45	1	1	19,216	16.0	2.6%	8% 8%	100.0%	100.0%	57% 57%	100.0%	
170	LED Screw-Base Replacement for HID Lamps LED Screw-Base Replacement for HID Lamps	5.45 4.50	1	1	19,216 19,216	320.8 1067.2	1.2% 2.9%	8%	100.0% 100.0%	100.0% 100.0%	57%	100.0%	
171	LED Screw-Base Replacement for HID Lamps	4.62	1	1	19,216	166.0	3.2%	3%	100.0%	100.0%	72%	100.0%	2,210
172	LED Screw-Base Replacement for HID Lamps	4.78	1	1	19,216	7.0	25.1%	8%	100.0%	100.0%	57%	100.0%	1,523
173	LED Screw-Base Replacement for HID Lamps	4.28	1	1	19,216	30.5	45.5%	2%	100.0%	100.0%	50%	100.0%	
174	LED Screw-Base Replacement for HID Lamps	5.04	1	1	19,216	48.7	4.0%	3%	100.0%	100.0%	53%	100.0%	686
175	LED Screw-Base Replacement for HID Lamps	4.69	1	1	19,216	320.8	7.1%	1%	100.0%	100.0%	65%	100.0%	
176	LED Screw-Base Replacement for HID Lamps	3.46	1	1	19,216	14.0	6.3%	8%	100.0%	100.0%	57%	100.0%	
177	LED Screw-Base Replacement for HID Lamps	4.28	1	1	19,216	4.0	2.1%	8%	100.0%	100.0%	57%	100.0%	72
178 179	Small Business LED Screw-ins Small Business LED Screw-ins	2.25 2.10	1	1	33,489 33,489	21.4 21.4	1.4% 71.1%	100% 100%	100.0% 100.0%	100.0% 100.0%	59% 59%	11.1% 11.1%	664 33,692
180	Small Business LED Screw-ins	2.57	1	1	33,489	21.4	16.7%	100%	100.0%	100.0%	59%	11.1%	
181	Small Business LED Screw-ins	2.13	1	1	33.489	21.4	2.6%	100%	100.0%	100.0%	59%	11.1%	
182	Small Business LED Screw-ins	2.69	1	1	33,489	21.4	4.4%	100%	100.0%	100.0%	59%	11.1%	2,063
183	Small Business LED Screw-ins	2.38	1	1	33,489	21.4	2.0%	100%	100.0%	100.0%	59%	11.1%	943
184	Small Business LED Screw-ins	2.05	1	1	33,489	21.4	0.1%	100%	100.0%	100.0%	59%	11.1%	59
185	T-LED Replacement Lamps/Tubes	2.01	1	1	19,216	32.0	2.6%	90%	100.0%	100.0%	87%	100.0%	
186	T-LED Replacement Lamps/Tubes	2.56	1	1	19,216	467.3	1.2%	90%	100.0%	100.0%	87% 87%	100.0%	
187 188	T-LED Replacement Lamps/Tubes T-LED Replacement Lamps/Tubes	2.17 2.22	1	1	19,216 19,216	216.4 826.0	3.2%	90% 98%	100.0% 100.0%	100.0% 100.0%	95%	100.0% 100.0%	
189	T-LED Replacement Lamps/Tubes	2.28	1	1	19,216	764.0	25.1%	90%	100.0%	100.0%	87%	100.0%	2,908,181
190	T-LED Replacement Lamps/Tubes	2.08	1	1	19,216	366.9	45.5%	88%	100.0%	100.0%	81%	100.0%	2,291,282
191	T-LED Replacement Lamps/Tubes	2.39	1	1	19,216	75.6	4.0%	95%	100.0%	100.0%	86%	100.0%	
192	T-LED Replacement Lamps/Tubes	2.24	1	1	19,216	246.0	7.1%	92%	100.0%	100.0%	80%	100.0%	247,876
193	T-LED Replacement Lamps/Tubes	1.75	1	1	19,216	1969.0	6.3%	90%	100.0%	100.0%	87%	100.0%	
194	T-LED Replacement Lamps/Tubes	2.08	1	1	19,216	447.0	2.1%	90%	100.0%	100.0%	87%	100.0%	
195	LED Exterior Fixtures	1.64 2.11	1	1	19,216	28.0	2.6%	77% 77%	100.0%	100.0%	57%	100.0%	6,239
196 197	LED Exterior Fixtures LED Exterior Fixtures	2.11 1.78	1	1	19,216 19,216	28.0 79.0	1.2% 2.9%	77%	100.0% 100.0%	100.0% 100.0%	57% 57%	100.0% 100.0%	2,866 19,589
197	LED Exterior Fixtures	1.82	1	1	19,216	79.0 21.0	3.2%	53%	100.0%	100.0%	72%	100.0%	
199	LED Exterior Fixtures	1.88	1	1	19,216	8.2	25.1%	77%	100.0%	100.0%	57%	100.0%	
200	LED Exterior Fixtures	1.70	1	1	19,216	8.5	45.5%	68%	100.0%	100.0%	50%	100.0%	
201	LED Exterior Fixtures	1.97	1	1	19,216	7.0	4.0%	68%	100.0%	100.0%	53%	100.0%	1,917
202	LED Exterior Fixtures	1.84	1	1	19,216	22.7	7.1%	63%	100.0%	100.0%	65%	100.0%	12,589
203	LED Exterior Fixtures	1.41	1	1	19,216	8.2	6.3%	77%	100.0%	100.0%	57%	100.0%	
204	LED Exterior Fixtures	1.70	1	1	19,216	4.7	2.1%	77%	100.0%	100.0%	57%	100.0%	
205 206	Small Business LED Exterior Lights Small Business LED Exterior Lights	1.60 1.40	1 1	1	33,489 33,489	5.8 2.5	0.8% 1.4%	69% 69%	100.0% 100.0%	100.0% 100.0%	59% 59%	7.7% 7.7%	47 37
200	Small Business LED Exterior Lights Small Business LED Exterior Lights	1.75	1	1	33,489	2.5 9.4	71.1%	69%	100.0%	100.0%	59%	7.7%	7,063
208	Small Business LED Exterior Lights	1.63	1	1	33,489	2.2	16.7%	69%	100.0%	100.0%	59%	7.7%	395
209	Small Business LED Exterior Lights	1.59	1	1	33,489	4.1	2.6%	69%	100.0%	100.0%	59%	7.7%	
210	Small Business LED Exterior Lights	1.63	1	1	33,489	1.9	4.4%	69%	100.0%	100.0%	59%	7.7%	88
211	Small Business LED Exterior Lights	1.78	1	1	33,489	1.5	2.0%	69%	100.0%	100.0%	59%	7.7%	32
212	Small Business LED Exterior Lights	1.83	1	1	33,489	2.3	0.1%	69%	100.0%	100.0%	59%	7.7%	3
213	LED Downlight or Pendant Fixture	11.50	1	1	19,216	57.0	2.6%	100%	43.5%	100.0%	57%	100.0%	
214 215	LED Downlight or Pendant Fixture	13.76	1	1	19,216	12.0	1.2% 2.9%	100%	43.5% 43.5%	100.0%	57% 57%	100.0%	690
215	LED Downlight or Pendant Fixture LED Downlight or Pendant Fixture	12.16 12.36	1	1	19,216 19,216	172.3 34.0	3.2%	100% 100%	43.5% 43.5%	100.0% 100.0%	72%	100.0% 100.0%	
217	LED Downlight or Pendant Fixture	12.63	1	1	19,216	12.0	25.1%	100%	43.5%	100.0%	57%	100.0%	14,332
218	LED Downlight or Pendant Fixture	11.78	1	1	19,216	12.0	45.5%	100%	43.5%	100.0%	50%	100.0%	22,846
219	LED Downlight or Pendant Fixture	13.06	1	1	19,216	12.0	4.0%	100%	43.5%	100.0%	53%	100.0%	2,104
220	LED Downlight or Pendant Fixture	12.47	1	1	19,216	8.0	7.1%	100%	43.5%	100.0%	65%	100.0%	3,067
221	LED Downlight or Pendant Fixture	10.43	1	1	19,216	57.0	6.3%	100%	43.5%	100.0%	57%	100.0%	
222	LED Downlight or Pendant Fixture	11.79	1	1	19,216	12.0	2.1%	100%	43.5%	100.0%	57%	100.0%	
223 224	LED High-Bay Fixture LED High-Bay Fixture	3.34 4.35	1	1	19,216 19,216	56.0 150.8	2.6% 1.2%	90% 90%	36.1% 36.1%	100.0% 100.0%	87% 87%	100.0% 100.0%	8,055 9,965
224	LED High-Bay Fixture LED High-Bay Fixture	4.35 3.64	1	1	19,216	150.8 28.0	2.9%	90%	36.1% 36.1%	100.0%	87%	100.0%	9,965
225	LED High-Bay Fixture	3.73	1	1	19,216	237.0	3.2%	98%	2.1%	100.0%	95%	100.0%	4,462 2,846
227	LED High-Bay Fixture	3.85	1	1	19,216	28.0	25.1%	90%	36.1%	100.0%	87%	100.0%	
228	LED High-Bay Fixture	3.47	1	1	19,216	14.0	45.5%	88%	12.4%	100.0%	81%	100.0%	10,811
229	LED High-Bay Fixture	4.04	1	1	19,216	28.0	4.0%	95%	7.4%	100.0%	86%	100.0%	1,287
230	LED High-Bay Fixture	3.78	1	1	19,216	26.0	7.1%	92%	9.4%	100.0%	80%	100.0%	2,459

- Page 107 of 133

ELECTRONICALLY FILED - 2019 October 2 1:00 PM - SCPSC - Docket # 2019-239-E

Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Program-Measure Inclusion (if Passed Measure Screening)	Total Sub- Sector Units	Measure Units per Sub-Sector Unit	Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
231	LED High-Bay Fixture	2.86	1	1	19,216	56.0	6.3%	90%	36.1%	100.0%	87%	100.0%	19,331
232	LED High-Bay Fixture	3.47 3.60	1	1	19,216	54.7	2.1%	90% 90%	36.1%	100.0%	87% 87%	100.0%	6,216
233	LED Troffer or Panel Fixture LED Troffer or Panel Fixture	3.60 4.12	1	1	19,216 19,216	120.0 92.4	1.2%	90%	63.9% 63.9%	100.0% 100.0%	87%	100.0% 100.0%	30,596 10,823
235	LED Troffer or Panel Fixture	3.75	1	1	19,216	3.5	2.9%	90%	63.9%	100.0%	87%	100.0%	
236	LED Troffer or Panel Fixture	3.80	1	1	19,216	29.0	3.2%	98%	97.9%	100.0%	95%	100.0%	16,380
237 238	LED Troffer or Panel Fixture LED Troffer or Panel Fixture	3.86 3.67	1	1	19,216 19,216	74.3 27.9	25.1% 45.5%	90% 88%	63.9% 87.6%	100.0% 100.0%	87% 81%	100.0% 100.0%	180,811 152,674
239	LED Troffer or Panel Fixture	3.96	1	1	19,216	31.3	4.0%	95%	92.6%	100.0%	86%	100.0%	18,036
240	LED Troffer or Panel Fixture	3.82	1	1	19,216	150.0	7.1%	92%	90.6%	100.0%	80%	100.0%	136,954
241	LED Troffer or Panel Fixture	3.36	1	1	19,216	29.5	6.3%	90%	63.9%	100.0%	87%	100.0%	18,051
242 243	LED Troffer or Panel Fixture 4,800 Lumens LED Open Type	3.67 2.67	1	1	19,216 54,146	51.5 1.0	2.1% 100.0%	90% 100%	63.9% 2.7%	100.0% 100.0%	87% 100%	100.0% 100.0%	10,375 1,442
244	4,800 Lumens LED Open Type	3.17	1	1	54,146	1.0	100.0%	100%	3.0%	100.0%	100%	100.0%	
245	ATB0 grey 108w	3.74	1	1	54,146	1.0	100.0%	100%	45.1%	100.0%	100%	100.0%	
246 247	ATB0 grey 108w	3.34	1	1	54,146	1.0	100.0% 100.0%	100% 100%	24.1%	100.0%	100% 100%	100.0%	
247	ATB0 grey 72w ATB0 grey 72w	1.99 2.59	1	1	54,146 54,146	1.0 1.0	100.0%	100%	1.0% 0.6%	100.0% 100.0%	100%	100.0% 100.0%	
249	ATB0 grey 72w	2.47	1	1	54,146	1.0	100.0%	100%	5.1%	100.0%	100%	100.0%	
250	ATB2 grey 216w	2.68	1	1	54,146	1.0	100.0%	100%	2.2%	100.0%	100%	100.0%	
251 252	ATB2 grey 216w	2.80 2.99	1	1	54,146 54,146	1.0 1.0	100.0% 100.0%	100% 100%	2.9% 9.3%	100.0% 100.0%	100% 100%	100.0% 100.0%	
252	ATB2 grey 216w ATB2 grey 216w	2.84	1	1	54,146	1.0	100.0%	100%	4.0%	100.0%	100%	100.0%	2,167
254	Daylight Control/Harvesting (On/Off)	1.50	1	1	19,216	154.0	2.6%	100%	100.0%	100.0%	28%	100.0%	21,721
255	Daylight Control/Harvesting (On/Off)	2.31	1	1	19,216	7.5	1.2%	100%	100.0%	100.0%	28%	100.0%	486
256 257	Daylight Control/Harvesting (On/Off) Daylight Control/Harvesting (On/Off)	1.48 1.79	1	1	19,216 19,216	28.5 28.5	2.9% 3.2%	100% 100%	100.0% 100.0%	100.0% 100.0%	28% 35%	100.0% 100.0%	4,474 6,277
	Daylight Control/Harvesting (On/Off)	1.82	1	1	19,216	28.5	25.1%	100%	100.0%	100.0%	28%	100.0%	
259	Daylight Control/Harvesting (On/Off)	1.65	1	1	19,216	17.5	45.5%	100%	100.0%	100.0%	37%	100.0%	
	Daylight Control/Harvesting (On/Off)	1.99 1.97	1	1	19,216	7.5	4.0% 7.1%	100%	100.0% 100.0%	100.0% 100.0%	31% 44%	100.0%	
	Daylight Control/Harvesting (On/Off) Daylight Control/Harvesting (On/Off)	1.00	1	1	19,216 19,216	7.5 154.0	6.3%	100% 100%	100.0%	100.0%	28%	100.0% 100.0%	4,538 52,131
	Daylight Control/Harvesting (On/Off)	1.69	1	1	19,216	28.5	2.1%	100%	100.0%	100.0%	28%	100.0%	
	Daylight Harvesting (Dimming)	0.42	0	0									
265 266	Occupancy Sensor: Ceiling/Wall Mount (Remote) Occupancy Sensor: Ceiling/Wall Mount (Remote)	0.60 0.92	0	0									
267	Occupancy Sensor: Ceiling/Wall Mount (Remote)	0.59	0	0									
268	Occupancy Sensor: Ceiling/Wall Mount (Remote)	0.72	0	0									
269 270	Occupancy Sensor: Ceiling/Wall Mount (Remote) Occupancy Sensor: Ceiling/Wall Mount (Remote)	0.73 0.66	0	0									
271	Occupancy Sensor: Ceiling/Wall Mount (Remote)	0.80	0	0									
272 273	Occupancy Sensor: Ceiling/Wall Mount (Remote)	0.79 0.40	0	0									
	Occupancy Sensor: Ceiling/Wall Mount (Remote) Occupancy Sensor: Ceiling/Wall Mount (Remote)	0.40	0	0									
275	Occupancy Sensor: Fixture Mounted (High Bay)	0.38	0	0									
	Occupancy Sensor: Fixture Mounted (High Bay) Occupancy Sensor: Fixture Mounted (High Bay)	0.58	0	0									
277 278	Occupancy Sensor: Fixture Mounted (High Bay) Occupancy Sensor: Fixture Mounted (High Bay)	0.37 0.45	0	0									
279	Occupancy Sensor: Fixture Mounted (High Bay)	0.46	0	0									
280	Occupancy Sensor: Fixture Mounted (High Bay)	0.41	0	0									
281 282	Occupancy Sensor: Fixture Mounted (High Bay) Occupancy Sensor: Fixture Mounted (High Bay)	0.50 0.49	0	0									
283	Occupancy Sensor: Fixture Mounted (High Bay)	0.25	0	0									
284 285	Occupancy Sensor: Fixture Mounted (High Bay) Occupancy Sensor: Wall Switch Replacement	0.42 0.46	0	0									
285	Occupancy Sensor: Wall Switch Replacement Occupancy Sensor: Wall Switch Replacement	0.46	0	0									
287	Occupancy Sensor: Wall Switch Replacement	0.45	0	0									
288	Occupancy Sensor: Wall Switch Replacement	0.55	0	0									
289 290	Occupancy Sensor: Wall Switch Replacement Occupancy Sensor: Wall Switch Replacement	0.56 0.50	0	0									
291	Occupancy Sensor: Wall Switch Replacement	0.61	0	0									
292	Occupancy Sensor: Wall Switch Replacement	0.60	0	0									
293 294	Occupancy Sensor: Wall Switch Replacement Occupancy Sensor: Wall Switch Replacement	0.31 0.52	0	0									
	Small Business Occupancy Sensor	0.19	0	0									
296	Lighting Density Reduction, Building Method	0.12	0	0									
297 298	Lighting Density Reduction, Building Method Lighting Density Reduction, Building Method	0.24 0.15	0	0									
299	Lighting Density Reduction, Building Method	0.16	0	0									
300	Lighting Density Reduction, Building Method	0.15	0	0									
301 302	Lighting Density Reduction, Building Method	0.17 0.20	0	0									
303	Lighting Density Reduction, Building Method Lighting Density Reduction, Building Method	0.20	0	0									
304	Lighting Density Reduction, Building Method	0.09	0	0									
305 306	Lighting Density Reduction, Building Method	0.08 0.12	0	0									
306	Lighting Density Reduction, Space Method Lighting Density Reduction, Space Method	0.12	0	0									
308	Outdoor Lighting	2.66	1	1	1,138	1.0	42.4%	100%	100.0%	100.0%	100%	100.0%	483

Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Program-Measure Inclusion (if Passed Measure Screening)	Total Sub- Sector Units	Measure Units per Sub-Sector Unit	Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
309	A19 LED Poultry	12.53	1	1	1,138	244.0	32.1%	100%	100.0%	100.0%	100%	100.0%	89,060
310	Small Business Abandoned Fluorescent	4.49	1	1	33,489		1.4%	38%	100.0%	100.0%	100%	18.2%	832
311	Small Business Abandoned Fluorescent	7.86	1	1	33,489		71.1%	38%	100.0%	100.0%	100%	18.2%	42,207
312	Small Business Abandoned Fluorescent	5.15	1	1	33,489	25.8	16.7%	38%	100.0%	100.0%	100%	18.2%	9,911
313	Small Business Abandoned Fluorescent	8.01	1	1	33,489	25.8	4.4%	38%	100.0%	100.0%	100%	18.2%	2,585
314	Small Business Abandoned Fluorescent	4.62	1	1	33,489	25.8	0.1%	38%	100.0%	100.0%	100%	18.2%	74
315	Small Business Abandoned HID	12.16	1	1	33,489		0.1%	3%	100.0%	100.0%	100%	18.2%	1
316	LED Exit Signs	2.36	1	1	19,216	6.7	2.6%	100%	100.0%	100.0%	56%	100.0%	1,906
317	LED Exit Signs	2.51	1	1	19,216	6.7	1.2%	100%	100.0%	100.0%	56%	100.0%	876
318	LED Exit Signs	2.27	1	1	19,216	6.7	2.9%	100%	100.0%	100.0%	56%	100.0%	2,121
319	LED Exit Signs	2.41	1	1	19,216	7.7	3.2%	100%	100.0%	100.0%	42%	100.0%	2,004
320 321	LED Exit Signs	2.39 2.40	1	1	19,216 19,216	6.7	25.1% 45.5%	100% 100%	100.0% 100.0%	100.0% 100.0%	56% 55%	100.0% 100.0%	18,193
321	LED Exit Signs LED Exit Signs	2.40	1	1	19,216	6.3 2.6		100%	100.0%	100.0%	56%	100.0%	30,099 1,118
323	LED Exit Signs	2.43	<u>'</u>	1	19,216	3.4		100%	100.0%	100.0%	69%	100.0%	3,228
323	LED Exit Signs	2.49	1	1	19,216	6.7	6.3%	100%	100.0%	100.0%	56%	100.0%	4,575
324	LED Exit Signs	2.23	<u> </u>	1	19,216	6.7	2.1%	100%	100.0%	100.0%	56%	100.0%	1,506
326	Small Business LED Exit Signs	0.87	Ó	1	33 489	2.5	16.7%	100%	100.0%	100.0%	55%	100.0%	7,686
327	Small Business LED Exit Signs	0.84	0	1	33,489	1.0	2.6%	100%	100.0%	100.0%	56%	100.0%	486
328	Small Business LED Exit Signs	0.88	0	1	33,489	2.4		100%	100.0%	100.0%	69%	100.0%	2,414
329	Small Business LED Exit Signs	0.87	0	1	33,489	3.0	2.0%	100%	100.0%	100.0%	56%	100.0%	1,119
330	Small Business LED Exit Signs	0.83	0	1	33,489	2.2	0.1%	100%	100.0%	100.0%	56%	100.0%	52
331	Solar Light Tubes	0.26	0	0									1
332	Solar Light Tubes	0.35	0	0									1
333	Solar Light Tubes	0.63	0	0									1
334	Solar Light Tubes	0.47	0	0									
335	Solar Light Tubes	0.58	0	0									
336 337	Solar Light Tubes Solar Light Tubes	0.38 0.47	0	0									ı l
338	Solar Light Tubes	0.47	0	0									
339	Solar Light Tubes	0.43	0	0									
340	A19 LED Swine	10.83	1	1	1,138	538.0	1.7%	100%	100.0%	100.0%	100%	100.0%	10,222
341	Power Strip with Occupancy Sensor	0.12	, O	o o	1,100	000.0	1	10070	100.070	100.070	10070	100.070	10,222
342	Computer Power Management - Monitor	2.01	1	1	52 705	17.3	27.2%	93%	80.0%	100.0%	99%	100.0%	182 098
343	Computer Power Management - Desktop	4.27	1	1	52,705	17.3	27.2%	93%	40.0%	100.0%	99%	100.0%	91,049
344	Computer Power Management - Laptop	1.23	1	1	52,705	17.3	27.2%	93%	60.0%	100.0%	99%	100.0%	136,573
345	Compressed Air Controller, Pressure/Flow Controller; >15 HP	0.43	0	0									
346	Compressed Air Controller, Pressure/Flow Controller 15 HP	0.37	0	0									
347	VFD Air Compressors; > 15 HP	0.61	0	0									
348	VFD Air Compressors; ≤ 15 HP	0.45	0	0									
349	Commercial Clothes Dryer Moisture Sensor	4.32	1	1	52,705	4.6	100.0%	21%	100.0%	100.0%	60%	100.0%	30,941
350	Clothes Washers - Electric Water Heater	0.32	0	0									
351	Clothes Washers - Heat Pump Water Heater	0.32	0	0									
352	Clothes Washers - Non-Electric Water Heater	0.32	0	0	0.50		400.00/	4000/	100.00/	400.007	4000/	400.00/	050
353 354	Large Commercial Building 10% better than applicable code	1.76 1.76	1	1	250 435	1.0	100.0% 100.0%	100%	100.0% 100.0%	100.0%	100% 100%	100.0%	250 435
354	Small Commercial Building 10% better than applicable code Large Commercial Building Retro-Commissioning	2.04	1	1	52,705	1.0	100.0%	100%	100.0%	100.0% 50.0%	83%	100.0%	21,873
356	Small Commercial Building Retro-Commissioning Small Commercial Building Retro-Commissioning	1.72	,	1	52,705			100% 100%	100.0%	50.0%	83%	100.0% 100.0%	21,873
357	Energy Management System	1.72	1	1	52,705	1.0	1.5%	2%	100.0%	100.0%	84%	100.0%	21,073
358	Energy Management System Energy Management System	1.39	<u> </u>	1	52,705	1.0	27.2%	2%	100.0%	100.0%	84%	100.0%	241
359	Energy Management System	1.08	1	1	52,705	1.0	5.3%	2%	100.0%	100.0%	84%	100.0%	47
360	EndSuction Pump 0.75 HP	0.75	Ö	1	1.138	1.0	57.6%	100%	100.0%	23.8%	100%	6.7%	10
361	EndSuction Pump 2 HP	1.64	1	1	1,138			100%	100.0%	76.2%	100%	6.7%	33
362	Pump Tune-up 60 HP	0.73	Ö	1	1,138		57.6%	100%	100.0%	100.0%	100%	100.0%	
363	Submersible Boost Pump 1 HP	0.62	0	1	1,138		57.6%	100%	100.0%	17.1%	100%	6.7%	7
364	Submersible Boost Pump 5 HP	1.60	1	1	1,138	1.0	57.6%	100%	100.0%	82.9%	100%	6.7%	36
365	Pump Tune-up < 40 HP	1.10	1	1	52,705	26.7	2.1%	2%	100.0%	100.0%	100%	100.0%	439
366	Pump Tune-up < 40 HP	0.45	0	0									1
367	Pump Tune-up < 40 HP	0.43	0	0									1
368	Low Pressure Irrigation System	4.88	1	1	1,138	1.0	57.6%	100%	100.0%	100.0%	100%	100.0%	655
369	ENERGY STAR Pool Pump	3.83	1	1	52,705	1.0	100.0%	2%	100.0%	100.0%	66%	10.0%	53
370	Door Gaskets for Walk-in and Reach-in Freezers	2.12	1	1	19,216	36.0	65.8%	44%	40.0%	100.0%	67%	100.0%	53,926
371	Door Gaskets for Walk-in and Reach-in Coolers	0.28	0	0									1
372	Anti-Sweat Heater Controls - Cooler Doors	1.12	1	1	19,216	1.8	65.8%	44%	60.0%	35.2%	67%	100.0%	1,426
373	Zero Energy Doors, Cooler	1.96	1	1	19,216	1.8	65.8%	44%	30.0%	64.8%	67%	100.0%	1,309
374	Small Business Cooler Door Heater Controls	2.10	1 1	1	33,489	1.0	0.8%	67%	100.0%	100.0%	82%	100.0%	140
375 376	Small Business Cooler Door Heater Controls	1.04	1	1	33,489 19,216	1.0	2.6%	67%	100.0% 40.0%	100.0%	82%	100.0%	475
	Anti-Sweat Heater Controls - Freezer Doors	1.97	1 1	1	,	1.8	65.8%	44%		40.0%	67%		1,078
377 378	Zero Energy Doors, Freezer	4.32 0.62	1	1	19,216 33,489	1.8	65.8% 0.8%	44% 67%	40.0% 100.0%	60.0% 100.0%	67% 82%	100.0% 100.0%	1,619 140
378 379	Small Business Freezer Door Heater Controls Small Business Freezer Door Heater Controls	0.62	0	0	33,489	1.0	U.076	67%	100.0%	100.0%	62%	100.0%	140
379	Electronically Commutated Motors for All Refrigeration	0.30	0	0									1
381	Small Business Other Controls & EC Motors - Large	0.76	0	0									1
382	Small Business Other Controls & EC Motors - Large Small Business Other Controls & EC Motors - Large	0.27	0	0									1
383	Small Business Other Controls & EC Motors - Medium	0.84	0	1	33,489	3.3	0.8%	15%	50.0%	33.3%	81%	100.0%	17
384	Small Business Other Controls & EC Motors - Medium	1.39	1	1	33,489	3.3	2.6%	15%	50.0%	50.0%	81%	100.0%	87
385	Small Business Other Controls & EC Motors - Small	0.74	0	1	33,489	3.3	0.8%	15%	50.0%	33.3%	81%	100.0%	17
386	Small Business Other Controls & EC Motors - Small	0.69	0	1	33,489	3.3	2.6%	15%	50.0%	50.0%	81%	100.0%	87

Commercial Measures

Measure II	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Program-Measure Inclusion (if Passed Measure Screening)	Total Sub- Sector Units	Measure Units per Sub-Sector Unit	Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
387	Small Business Evaporative/Compressor Controls	0.85	0	1	33,489	3.3	0.8%	15%	50.0%	33.3%	81%	100.0%	17
388	Small Business Evaporative/Compressor Controls	0.47	0	0									
389 390	Batch Ice Machine, Ice Making Head Batch Ice Machine Self-Contained	0.58 0.12	0	0									
390	Batch Ice Machine, Self-Contained Batch Ice Machine, Split System	0.12	0	0									
391	Continuous Ice Machine, Ice Making Head	1.21	1	1	19,216	1.0	65.8%	77%	50.0%	82.1%	67%	8.3%	224
393	Continuous Ice Machine, Self-Contained	0.46	, O	0	10,210	1.0	00.070	1170	30.070	02.170	01 70	0.570	227
394	Continuous Ice Machine, Split System	0.55	0	1	19,216	1.0	65.8%	77%	50.0%	17.9%	67%	8.3%	49
395	LED Refrigeration Case Lighting	0.40	0	0									
396	Small Business LED Case Lights	0.83	0	1	33,489	3.3	0.8%	67%	100.0%	100.0%	59%	100.0%	335
397	Small Business LED Case Lights	0.64	0	1	33,489	3.3	2.6%	67%	100.0%	100.0%	59%	100.0%	1,135
398	LED Refrigeration Case Lighting Controls	8.80 0.91	1	1	19,216	1.8	65.8%	44% 44%	100.0%	100.0%	67% 98%	100.0%	6,741
399 400	Refrigeration Night Covers - Coolers	1.21	1	1	19,216	5.4	65.8% 65.8%	44%	60.0% 40.0%	100.0%	98%	100.0%	17,700
400	Refrigeration Night Covers - Freezers Glass Door Reach-in Freezer: < 15 cubic feet	10.33	1	1	19,216 19,216	5.4 1.0	65.8%	16%	40.0% 8.0%	100.0% 52.7%	55%	100.0% 8.3%	11,800
402	Glass Door Reach-in Freezer;≥ 15 & < 30 cubic feet	12.07	1	1	19,216	1.5	65.8%	16%	8.0%	50.0%	55%	8.3%	-
403	Glass Door Reach-in Freezer;≥ 30 & < 50 cubic feet	14.42	1	1	19,216	2.0	65.8%	16%	16.0%	50.0%	55%	8.3%	15
404	Glass Door Reach-in Freezer;≥ 50 cubic feet	17.78	1	1	19,216	3.0	65.8%	16%	8.0%	50.0%	55%	8.3%	11
405	Reach-in Freezer; < 15 cubic feet	3.12	1	1	19,216	1.0	65.8%	16%	8.0%	47.3%	31%	8.3%	2
406	Reach-in Freezer;≥ 15 & < 30 cubic feet	5.77	1	1	19,216	1.5	65.8%	16%	8.0%	50.0%	31%	8.3%	3
407	Reach-in Freezer;≥ 30 & < 50 cubic feet	7.74	1	1	19,216	2.0	65.8%	16%	16.0%	50.0%	31%	8.3%	8
408	Reach-in Freezer;≥ 50 cubic feet	10.79	1	1	19,216	3.0	65.8%	16%	8.0%	50.0%	31%	8.3%	6
409	Glass Door Reach-in Refrigerator; < 15 cubic feet	4.25	1	1 1	19,216	1.0	65.8%	16%	12.0%	50.0%	55%	8.3%	6
410 411	Glass Door Reach-in Refrigerator ≥ 15 & < 30 cubic feet Glass Door Reach-in Refrigerator ≥ 30 & < 50 cubic feet	3.94 4.30	1	1 1	19,216 19,216	1.5	65.8% 65.8%	16% 16%	12.0% 24.0%	50.0% 50.0%	55% 55%	8.3% 8.3%	8
411 412	Glass Door Reach-in Refrigerator;≥ 30 & < 50 cubic feet Glass Door Reach-in Refrigerator;≥ 50 cubic feet	4.30 4.06	1	1	19,216 19,216	2.0 3.0	65.8%	16% 16%	24.0% 12.0%	50.0% 50.0%	55%	8.3% 8.3%	22 17
412	Reach-in Refrigerator; < 15 cubic feet	7.31	1	1	19,216	1.0	65.8%	16%	12.0%	50.0%	31%	8.3%	17
414	Reach-in Refrigerator;≥ 15 & < 30 cubic feet	6.75	1	1	19,216	1.5	65.8%	16%	12.0%	50.0%	31%	8.3%	5
415	Reach-in Refrigerator;≥ 30 & < 50 cubic feet	6.33	1	1	19,216	2.0	65.8%	16%	24.0%	50.0%	31%	8.3%	13
416	Reach-in Refrigerator;≥ 50 cubic feet	4.79	1	1	19,216	3.0	65.8%	16%	12.0%	50.0%	31%	8.3%	9
417	Automatic Door Closer for Walk-In Coolers	3.45	1	1	19,216	1.0	65.8%	31%	60.0%	100.0%	94%	100.0%	2,209
418	Automatic Door Closer for Walk-In Freezers	3.45	1	1	19,216	1.0	65.8%	31%	40.0%	100.0%	94%	100.0%	1,473
419	High Speed Doors for Cold Storage Facilities	2.77	1	1	19,216	40.0	2.1%	4%	100.0%	100.0%	67%	100.0%	441
420	Zero Energy Doors, Refrigerator	2.07	1	1	19,216	1.8	65.8%	52%	30.0%	100.0%	67%	100.0%	2,390
421	Strip Curtains for Walk-in Coolers	1.65	1	1	19,216	20.0	65.8%	31%	60.0%	100.0%	10%	100.0%	4,499
422	Strip Curtains for Walk-in Freezers	8.81 0.84	1	1	19,216	20.0	65.8% 100.0%	31% 67%	40.0%	100.0%	10% 67%	100.0%	3,000
423 424	Vending Machine Controls - Non-Refrigerated Vending Machine Controls - Refrigerated	1.29	0	1	19,216 19,216	9.1 9.1	100.0%	67% 67%	100.0% 100.0%	100.0% 100.0%	67%	100.0% 100.0%	78,369 78,369
424	Low Flow Faucet Aerators - Electric Water Heater	59.24	1	1	52,705	5.9	100.0%	60%	100.0%	100.0%	46%	100.0%	86,193
426	Low Flow Faucet Aerators - Non-Electric Water Heater	54.64	1	1	52,705	5.9	100.0%	6%	100.0%	0.0%	46%	100.0%	00,133
427	Low Flow Showerheads - Electric Water Heater	41.79	1	1	52,705	0.6	100.0%	60%	100.0%	100.0%	63%	100.0%	11,258
428	Low Flow Showerheads - Non-Electric Water Heater	37.24	1	1	52,705	0.6	100.0%	6%	100.0%	0.0%	63%	100.0%	0
429	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	0.04	0	0									
430	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	0.37	0	0									
431	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	2.34	1	1	33,489	1.0	2.6%	59%	60.0%	100.0%	94%	6.7%	19
432	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	6.95	1	1	19,216	1.0	4.0%	56%	40.0%	100.0%	94%	6.7%	11
433 434	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	0.03	0	0									
435	Electric Storage Water Heater,≥ 20 gal & ≤ 55 gal	0.07	0	0									
436	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	0.08	0	Ö									
437	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	0.24	0	0									
438	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	0.66	0	1	52,705	1.0	2.1%	67%	50.0%	100.0%	94%	6.7%	23
439	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	5.52	1	1	33,489	1.0	0.7%	59%	60.0%	100.0%	94%	6.7%	5
440 441	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal	1.70	1	1	19,216	1.0	2.9%	59%	40.0%	100.0%	94%	6.7%	8
441 442	Electric Storage Water Heater;≥ 20 gal & ≤ 55 gal Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	0.01 0.10	0	0									
442	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	0.10	0	1	19.216	1.0	45.5%	56%	60.0%	100.0%	94%	6.7%	183
444	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	5.47	1	1	33,489	1.0	2.6%	59%	40.0%	100.0%	94%	6.7%	13
445	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	16.26	1	1	19,216	1.0	4.0%	56%	60.0%	100.0%	94%	6.7%	16
446	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	0.06	0	0	.,								
447	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	0.08	0	0									
448	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	0.15	0	0									
449	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	0.18 0.55	0	0			6.00/			405	94%		
450 451	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	0.55 1.55	0	1 1	19,216 52,705	1.0	6.3% 2.1%	56% 67%	60.0% 50.0%	100.0%	94%	6.7% 6.7%	25 23
451 452	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	1.55 12.90	1	1	52,705 33,489	1.0 1.0	2.1% 0.7%	67% 59%	50.0% 40.0%	100.0% 100.0%	94%	6.7%	23
452 453	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	12.90 3.97	1	1	33,489 19,216	1.0	2.9%	59% 59%	40.0% 60.0%	100.0%	94%	6.7%	13
454	Electric Storage Water Heater;≥ 55 gal & ≤ 120 gal	0.03	Ö	0	18,210	1.0	2.070	39%	00.0%	100.076	34 /6	0.7%	13
455	Electric Tankless Water Heater; 10 GPM	1.62	1	1	52,705	1.0	100.0%	59%	35.0%	100.0%	92%	20.0%	1,990
456	Electric Tankless Water Heater; 15 GPM	1.43	1	1	52,705	1.0	100.0%	59%	20.0%	100.0%	92%	20.0%	1,137
457	Electric Tankless Water Heater; 5 GPM	2.08	1	1	52,705	1.0	100.0%	59%	45.0%	100.0%	92%	20.0%	2,559
458	Heat Pump Storage Water Heater	0.93	0	0							1		
459	Custom Lighting	1.97	1	1	19,216	1.0	100.0%	100%	100.0%	100.0%	90%	100.0%	17,294
460	Custom Non-Lighting	1.94	1 1	1 1	19,216	1.0	100.0%	100%	100.0%	100.0%	90%	100.0%	17,294

Commercial Measures

				MEASURE DESCRIPTION					T		MEASURE INCR	REMENTAL SAV	INGS PER UNIT	<u> </u>	
Measure ID	Sector	Sub-Sector	End Use	Measure Name	Measure Unit Name	Retrofit (RET), Replace-on- Burnout (ROB), or New Construction (NEW)	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost (per kWh usage)	Annual kWh Savings (percent of usage)	Annual kW Coincident Peak Savings (percent of usage)	Annual Gas Savings (Therms) (percent of usage)	Annual kWh Increases (percent of usage)	Annual kW Coincident Peak Increases (percent of usage)	Annual Gas Therms Increase (percent of usage)
1	Industrial	Small Industrial	Compressed Air	Compression ratio optimization (gas compressor)	Per kWh	Retrofit	20.0	20.0		0.15	0.0000	0	0	0.0000	0
2	Industrial	Small Industrial	Compressed Air	Eliminate air leaks	Per kWh	Retrofit	3.0	3.0		0.15	0.0000	0	0	0.0000	0
3		Small Industrial		Gas compressor right sizing	Per kWh	Retrofit	10.0	10.0		0.10		0	0	0.0000	0
4		Small Industrial	•	Minimize operating air pressure	Per kWh	Retrofit	1.0	1.0	*	0.20	0.0000	0	0	0.0000	0
5 6		Small Industrial Small Industrial	•	Minimum cylinder clearance Optimized Distribution System	Per kWh Per kWh	Retrofit Retrofit	5.0 10.0	5.0 10.0		0.10 0.10		0	0	0.0000	0
7		Small Industrial	•	Optimized sizes of air receiver tanks	Per kWh	Retrofit	10.0	10.0		0.10		0	0	0.0000	0
8		Small Industrial	1	Optimized sizing of compressor system	Per kWh	Retrofit	20.0	20.0		0.10	0.0000	0	0	0.0000	0
9	Industrial	Small Industrial	•	Premium Efficiency Air Dryer (compressors)	Per kWh	Retrofit	20.0	20.0	\$0.03	0.08	0.0000	0	0	0.0000	0
10		Small Industrial	Compressed Air	Premium efficiency ASD compressor	Per kWh	Retrofit	10.0	10.0		0.13		0	0	0.0000	0
11		Small Industrial		Premium efficiency ASD compressor	Per kWh	Retrofit	10.0	10.0		0.13	0.0000	0	0	0.0000	0
12 13		Small Industrial Small Industrial		Replace compressed air use with mechanical or electrical Retrofit internal parts of existing centrifugal compressors	Per kWh Per kWh	Retrofit Retrofit	20.0	20.0 20.0		0.56 0.05		0	0	0.0000	0
14		Small Industrial		Sequencing Control	Per kWh	Retrofit	5.0	5.0		0.03	0.0000	0	0	0.0000	0
15		Small Industrial		Synchronous Belts for Air Compressors	Per kWh	Retrofit	10.0	10.0		0.02		0	0	0.0000	0
16		Small Industrial	1	Synchronous Belts for Air or Gas Compressors	Per kWh	Retrofit	10.0	10.0		0.02	0.0000	0	0	0.0000	0
17	Industrial	Small Industrial	Compressed Air	Use cooler air from outside for make up air	Per kWh	Retrofit	20.0	20.0		0.04	0.0000	0	0	0.0000	0
18		Small Industrial		Volume pocket adjustments	Per kWh	Retrofit	20.0	20.0		0.10	0.0000	0	0	0.0000	0
19		Small Industrial	Fans	High/Premium Efficiency Motors (Fans)	Per kWh	Retrofit	15.0	15.0		0.02		0	0	0.0000	0
20		Small Industrial	Fans	Impeller Trimming or Inlet Guide Vanes	Per kWh	Retrofit	3.0	3.0		0.15		0	0	0.0000	0
21 22		Small Industrial Small Industrial	Fans Fans	Premium efficiency control, with ASD (Fans) Preventative Fan Maintenance	Per kWh Per kWh	Retrofit Retrofit	10.0 3.0	10.0 3.0		0.10 0.02		0	0	0.0000	0
23		Small Industrial	Fans	Synchronous Belts (Fans)	Per kWh	Retrofit	10.0	10.0		0.02	0.0000	0	0	0.0000	0
24		Small Industrial		Efficient Lighting Design	Per kWh	Retrofit	16.0	16.0		0.15		0	0	0.0000	0
25		Small Industrial	FL	High efficiency ballasts for lighting	Per kWh	Retrofit	11.0	11.0	\$0.01	0.25	0.0000	0	0	0.0000	0
26	Industrial	Small Industrial	FL	High Efficiency Light fixtures	Per kWh	Retrofit	16.0	16.0		0.45	0.0001	0	0	0.0000	0
27		Small Industrial	FL	Lighting controls: occupancy sensors	Per kWh	Retrofit	8.0	8.0		0.15		0	0	0.0000	0
28		Small Industrial	FL	Lighting controls: on/off timer settings	Per kWh	Retrofit	8.0	8.0		0.15		0	0	0.0000	0
29 30		Small Industrial	HVAC HVAC	Ventilation Optimization	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0		0.20 0.03	0.0000 0.0000	0	0	0.0000	0
31		Small Industrial Small Industrial		Air Curtains Air Source Heat Pump for Backup Generators	Per kWh	Retrofit	15.0	15.0		0.03	0.0000	0	0	0.0000	0
32		Small Industrial		Automated Temperature Control	Per kWh	Retrofit	25.0	25.0		0.07	0.0000	0	0	0.0000	0
33		Small Industrial		Demand-Controlled Ventilation	Per kWh	Retrofit	15.0	15.0		0.20	0.0000	0	0	0.0000	0
34	Industrial	Small Industrial	HVAC	Destratification Fans	Per kWh	Retrofit	20.0	20.0		0.08		0	0	0.0000	0
35		Small Industrial	HVAC	Free cooling	Per kWh	Retrofit	15.0	15.0		0.53	0.0001	0	0	0.0000	0
36		Small Industrial		Ground Source Heat Pump	Per kWh	Retrofit	20.0	20.0		0.51	0.0001	0	0	0.0000	0
37 38		Small Industrial Small Industrial	HVAC HVAC	Heat Recovery from Processes to Heat Ventilation Make-up Air High efficiency non-packaged HVAC equipment	Per kWh Per kWh	Retrofit Retrofit	15.0 20.0	15.0 20.0		0.15 0.25		0	0	0.0000	0
39		Small Industrial	HVAC	High-efficiency rooftop AC with an EER of 13.5	Per kWh	Retrofit	15.0	15.0		0.23	0.0000	0	0	0.0000	0
40		Small Industrial		Optimized duct design to improve efficiency	Per kWh	Retrofit	15.0	15.0		0.05		0	0	0.0000	0
41	Industrial	Small Industrial	HVAC	Premium efficiency ventilation control with VSD	Per kWh	Retrofit	10.0	10.0	\$0.04	0.30	0.0000	0	0	0.0000	0
42		Small Industrial	HVAC	Preventative Packaged HVAC Maintenance	Per kWh	Retrofit	3.0	3.0		0.05		0	0	0.0000	0
43		Small Industrial		Radiant Heaters	Per kWh	Retrofit	20.0	20.0		0.10		0	0	0.0000	0
44 45		Small Industrial		Reduced Temperature Settings Seasonal Temperature Settings Adjustments	Per kWh Per kWh	Retrofit	3.0	3.0		0.07		0	0	0.0000	0
46		Small Industrial Small Industrial		Ventilation Heat Recovery	Per kWh	Retrofit Retrofit	20.0	20.0		0.07 0.20		0	0	0.0000	0
47		Small Industrial		Warehouse Loading Dock Seals	Per kWh	Retrofit	10.0	10.0		0.05		0	0	0.0000	0
48		Small Industrial	Machine Drive	Integrated control system	Per kWh	Retrofit	10.0	10.0		0.08		0	0	0.0000	0
49	Industrial	Small Industrial	Machine Drive	Sub-Metering and Interval Metering	Per kWh	Retrofit	15.0	15.0		0.05		0	0	0.0000	0
50		Small Industrial		Correctly sized motors	Per kWh	Retrofit	15.0	15.0		0.02		0	0	0.0000	0
51		Small Industrial	Motor - Other	High/Premium Efficiency Motors	Per kWh	Retrofit	15.0	15.0		0.02		0	0	0.0000	0
52 53		Small Industrial Small Industrial		Optimized motor control Premium Efficiency Control with ASDs (Other motors)	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0		0.05 0.20		0	0	0.0000	0
54		Small Industrial	Motor - Other Motor - Other	Preventative Motor Maintenance	Per kWh	Retrofit	3.0	3.0		0.20		0	0	0.0000	0
55		Small Industrial		Synchronous Belts	Per kWh	Retrofit	10.0	10.0		0.03		0	0	0.0000	0
56		Small Industrial	ONPU	High efficiency battery charger (for forklifts)	Per kWh	Retrofit	20.0	20.0		0.10		0	0	0.0000	0
57	Industrial	Small Industrial		HE Dry-Type Transformers	Per kWh	Retrofit	30.0	30.0	\$0.00	0.01	0.0000	0	0	0.0000	0
		Small Industrial	PCR	Doors, Covers and Curtains	Per kWh	Retrofit	5.0	5.0		0.07		0	0	0.0000	0
59		Small Industrial	PCR	Floating head pressure controls	Per kWh	Retrofit	15.0	15.0		0.07		0	0	0.0000	0
60		Small Industrial	PCR	Free-cooling	Per kWh	Retrofit	12.0 20.0	12.0 20.0		0.21		0	0	0.0000	0
61 62		Small Industrial Small Industrial	PCR PCR	High Efficiency Chiller Improve insulation of refrigeration system	Per kWh Per kWh	Retrofit Retrofit	10.0	10.0		0.19 0.05		0	0	0.0000	<u> </u>
63		Small Industrial		Optimized chilled water temperature and/or optimized condenser temperature	Per kWh	Retrofit	3.0			0.03		0	0	0.0000	0
64		Small Industrial		Optimized condenser pressure	Per kWh	Retrofit	3.0	3.0		0.06		0	0	0.0000	0
65	Industrial	Small Industrial		Optimized Distribution System	Per kWh	Retrofit	25.0	25.0	\$0.02	0.03	0.0000	0	0	0.0000	0

Notice Poor Poor					MEASURE DESCRIPTION					1		MEASURE INCF	REMENTAL SAV	/INGS PER UNI	<u> </u>	
Geo. Security Fig. Personal effects of diseased complete and present a	Measure ID	Sector	Sub-Sector	End Use			Replace-on- Burnout (ROB), or New Construction	Lifetime	Lifetime	Incremental Cost (per kWh	Annual kWh Savings (percent of	Annual kW Coincident Peak Savings (percent of	Annual Gas Savings (Therms) (percent of	Annual kWh Increases (percent of	Annual kW Coincident Peak Increases (percent of	Therms Increase (percent of
Column Province Column	66	Industrial	Small Industrial		Premium efficiency refrigeration control system		Retrofit						0	0	0.0000	0
General Contents Col. Co													0	0		0
No. Sept. Sept.				_									0	0		0
Proceeding Series February Procedure Procedure													0	0		0
79 Foodblack													0	0		0
An	72	Industrial	Small Industrial	PH	Air Curtains (Oven)	Per kWh							0	0		0
Processor Proc													0	0		0
Process Proc					,								0	0		0
Fragment Provide Pro					,								0	0		0
Per No. Per					,								0	0		0
Description Control Contro	78	Industrial	Small Industrial		Preventative Furnace Maintenance	Per kWh							0	0		0
31 Incentate Portal Standard Pt													0	0		0
Part Productive Description Part P													0	0		0
No. Section Section													0	0		0
Both Included South Included South Included South Included South Included Inc							1						0	0		0
86	84				1 0(17		Retrofit	15.0	15.0	\$0.03	0.14	0.0000	0	0	0.0000	0
Production Compressed Arr Compressed Compress Par 8906 Republic 15.0 15.0 5.00 0.00 0.00000 0.00000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.00000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.00000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.00000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.00000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.00000 0.0000 0.000000 0.000000 0.000000 0.000000 0.000000 0.000000 0.000000 0.000000 0.0000000 0.0000	85	Industrial	Small Industrial	Pumps		Per kWh	1						0	0		0
Industrial Extensions Compressed New Propose Compressed Services Per XVP Respuil 15.0 15.0 15.0 0.000 0.00000 0 0.00000 0				-									0	0		0
Industrial Electronics Compressed for Value Compressed for Security Compressed for Compressed fo													0	0		0
Moduration Electromices Compressed Art Electromic and Neintenances Per With Reford 3.0 3.5 5.00 0.000 0 0.0000 0 0.0000 0				<u> </u>									0	0		0
Part Number													0	0		0
Industrial Electronics Fare Operation and Maintenance Per V/N Refusion 1.0 1.0 1.0 0.000 0.0 0.0000 0.	91	Industrial	Electronics	Compressed Air	Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0	\$0.00	0.20	0.0000	0	0	0.0000	0
Michaeline Chetromics Farm Reduce or Counted Fair Speed Per NVN Retroft 15.0 15.0 50.00 0.20 0.0000 0 0.00000 0 0 0.00000 0	92	Industrial	Electronics	Fans	Improve Fan Components	Per kWh							0	0		0
Park No. Park No. Report Park No. Park No. Report Park No. Park N													0	0		0
For Inclustrial Electronics					'								0	0		0
				FI									0	0		- 0
Per Inclustrial Electronics				FL									0	0		0
Industrial Electronics FL	98			FL	, ,		Retrofit	16.0	16.0	\$0.07			0	0	0.0000	0
Industrial Externois Ext	99	Industrial	Electronics		Lighting controls: occupancy sensors	Per kWh							0	0		0
Industrial Electronics				1 -									0	0		0
Industrial Electronics					' '								0	0		0
Industrial Electronics					'								0	0		0
106 Industrial Electronics HVAC High efficiency non-packaged HVAC equipment Per WWh Retrofit 20.0 20.0 \$1.72 0.25 0.0000 0 0.00000 0 0.00000 0													0	0		0
107 Industrial Electronics HVAC High-efficiency rooftop AC with an EER of 13.5 Per kWh Retroft 15.0 15.0 8.0.4 0.17 0.0000 0 0.00000 0 0.00000 0	105	Industrial	Electronics	HVAC	Heat Recovery from Processes to Heat Ventilation Make-up Air	Per kWh	Retrofit	15.0	15.0	\$3.34	0.15	0.0000	0	0	0.0000	0
108 Industrial Electronics				_									0	0		0
109 Industrial Electronics HVAC Preventative Packaged HVAC Maintenance Per kWh Retrofit 3.0 3.0 \$0.00 0.05 0.0000 0 0.0000 0 0.0000 0													0	0		0
110 Industrial Electronics HVAC Radiant Heaters Per kWh Retrofit 20.0 20.0 \$1.72 0.10 0.0000 0 0.0000 0 0.0000 0													0	0		0
Houstrial Electronics HVAC Reduced Temperature Settings Per kWh Retrofit 3.0 3.0 9.0.0 0.07 0.0000 0 0.0000 0 0.0000 0					ŭ								0	0		0
113 Industrial Electronics HVAC Ventilation Heat Recovery Per kWh Retrofit 20.0 20.0 \$0.88 0.20 0.0000 0 0 0.0000 0 0 0.0000 0					*** ** * * **** *			3.0	3.0	\$0.00			0	0		0
114 Industrial Electronics HVAC Warehouse Loading Dock Seals Per kWh Retrofit 10.0 10.0 50.05 0.05 0.000 0 0.0000 0 0.0000 0													0	0		0
115 Industrial Electronics Motor - Other Match Motor Size to Load Per kWh Retrofit 15.0 15.0 5.0.1 0.01 0.000 0 0 0.0000 0 0 0.0000 0				_	·								0	0		0
116 Industrial Electronics Motor - Other Motor Efficiency Upgrade Per kWh Retrofit 15.0 15.0 30.02 0.002 0.0000 0 0 0.0000 0 0 0.0000 0													0	0		0
117 Industrial Electronics Motor - Other Operations and maintenance Per kWh Retrofit 3.0 3.0 \$0.00 0.05 0.0000 0 0 0.0000 0 0 0.0000 0							1						0	0		
118 Industrial Electronics Motor - Other Variable Speed Drives Per kWh Retrofit 15.0 15.0 \$0.00 0.20 0.0000 0 0 0.0000 0 0 0.0000 0					, , ,		1						0	0		0
120 Industrial Electronics PCR Doors, Covers and Curtains Per kWh Retrofit 30.0 30.0 \$0.00 0.01 0.0000 0 0.0000 0 0.0000 0		Industrial	Electronics			Per kWh				\$0.00			0	0		0
121 Industrial Electronics PCR Doors, Covers and Curtains Per kWh Retrofit 5.0 5.0 \$0.00 0.07 0.0000 0 0 0.0000 0 0 0.0000 0													0	0		0
122 Industrial Electronics PCR Floating head pressure controls Per kWh Retrofit 15.0 15.0 \$0.00 0.07 0.000 0 0.0000 0 0.0000 0													0	0		0
123 Industrial Electronics PCR Free-cooling Per kWh Retrofit 12.0 12.0 \$0.02 0.21 0.0000 0 0 0.0000 0 0 0.0000 0					'								0	0		0
124 Industrial Electronics PCR High Efficiency Chiller Per kWh Retrofit 20.0 20.0 \$0.10 0.19 0.0000 0 0.0000 0 0.0000 0							1						0	0		0
126 Industrial Electronics PCR Optimized chilled water temperature and/or optimized condenser temperature Per kWh Retrofit 3.0 3.0 \$0.00 0.02 0.0000 0 0 0.0000 0 0 0.0000 0					ÿ		1						0	0		0
127 Industrial Electronics PCR Optimized condenser pressure Per kWh Retrofit 3.0 3.0 \$0.00 0.06 0.0000 0 0.0000 0 128 Industrial Electronics PCR Premium efficiency refrigeration control system Per kWh Retrofit 15.0 15.0 \$0.13 0.09 0.0000 0 0 0.0000 0 129 Industrial Electronics PCR Preventative refrigeration/cooling system maintenance Per kWh Retrofit 3.0 3.0 \$0.00 0.05 0.0000 0 0 0.0000 0													0	0		0
128 Industrial Electronics PCR Premium efficiency refrigeration control system Per kWh Retrofit 15.0 15.0 \$0.13 0.09 0.0000 0 0 0.0000 0 129 Industrial Electronics PCR Preventative refrigeration/cooling system maintenance Per kWh Retrofit 3.0 3.0 \$0.00 0.05 0.0000 0 0 0.0000 0							1						0	0		0
129 Industrial Electronics PCR Preventative refrigeration/cooling system maintenance Per kWh Retrofit 3.0 3.0 \$0.00 0.05 0.000 0 0 0.0000 0													0	0		0
					, , ,								0	- v		0
													0	0		0

132 Industria 133 Industria 134 Industria 135 Industria 136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Fabricated Metal	PH PUmps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Measure Name Measure Name Advanced water heater controls Air Curtains (Dryer) Air Curtains (Oven) Insulation (Dryer) Insulation (Oven) Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Measure Unit Name Per kWh	Retrofit (RET), Replace-on- Burnout (ROB), or New Construction (NEW) Retrofit	Baseline Unit Lifetime (Years) 20.0 20.0 20.0 15.0 15.0 25.0 3.0 20.0 15.0 15.0	Efficient Unit Lifetime (Years) 20.0 20.0 15.0 15.0 25.0 3.0 20.0 20.0	\$0.00 \$0.02 \$0.00 \$0.01 \$0.01 \$0.00 \$0.00	Annual kWh Savings (percent of usage) 0.03 0.15 0.05 0.05 0.03 0.05	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	Annual Gas Savings (Therms) (percent of usage) 0 0 0 0 0 0 0 0	Annual kWh Increases (percent of usage) 0 0 0 0 0 0 0 0 0 0	Annual kW Coincident Peak Increases (percent of usage) 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	Annual Gas Therms Increase (percent of usage) 0 0 0 0 0 0 0
131 Industria 132 Industria 133 Industria 134 Industria 135 Industria 136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 144 Industria 145 Industria 145 Industria	trial Electronics trial Fabricated Metal	PH P	Advanced water heater controls Air Curtains (Dryer) Air Curtains (Oven) Insulation (Dryer) Insulation (Oven) Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Preventative Oven Maintenance Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh	Burnout (ROB), or New Construction (NEW) Retrofit	Lifetime (Years) 20.0 20.0 20.0 15.0 15.0 25.0 3.0 20.0 15.0	20.0 20.0 20.0 20.0 15.0 15.0 25.0 3.0 20.0	Incremental Cost (per kWh usage) \$0.00 \$0.00 \$0.02 \$0.00 \$0.01 \$0.01 \$0.00	Savings (percent of usage) 0.03 0.15 0.05 0.05 0.05 0.03 0.05	Peak Savings (percent of usage) 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	(Therms) (percent of	Increases (percent of	Peak Increases (percent of usage)	Increase (percent of
131 Industria 132 Industria 133 Industria 134 Industria 135 Industria 136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 144 Industria 145 Industria	trial Electronics trial Fabricated Metal	PH P	Advanced water heater controls Air Curtains (Dryer) Air Curtains (Oven) Insulation (Dryer) Insulation (Oven) Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Preventative Oven Maintenance Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh	(ROB), or New Construction (NEW) Retrofit	(Years) 20.0 20.0 20.0 15.0 15.0 25.0 3.0 20.0 15.0	(Years) 20.0 20.0 20.0 15.0 15.0 25.0 3.0 3.0 20.0	\$0.00 \$0.00 \$0.02 \$0.02 \$0.01 \$0.01 \$0.00 \$0.00	(percent of usage) 0.03 0.15 0.15 0.05 0.05 0.03 0.05	(percent of usage) 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	(percent of	(percent of	Increases (percent of usage) 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	(percent of
132 Industria 133 Industria 134 Industria 135 Industria 136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 144 Industria 145 Industria	trial Electronics trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal	PH PUmps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Air Curtains (Dryer) Air Curtains (Oven) Insulation (Dryer) Insulation (Oven) Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh	Construction (NEW) Retrofit	20.0 20.0 20.0 15.0 15.0 25.0 3.0 20.0	20.0 20.0 20.0 15.0 15.0 25.0 3.0 20.0	\$0.00 \$0.00 \$0.02 \$0.00 \$0.01 \$0.01 \$0.00 \$0.00	0.03 0.15 0.15 0.05 0.05 0.03 0.03	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000		0 0 0 0 0 0 0 0	Usage) 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	••
132 Industria 133 Industria 134 Industria 135 Industria 136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 144 Industria 145 Industria	trial Electronics trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal	PH PUmps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Air Curtains (Dryer) Air Curtains (Oven) Insulation (Dryer) Insulation (Oven) Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh	Retrofit	20.0 20.0 15.0 15.0 25.0 3.0 3.0 20.0	20.0 20.0 15.0 15.0 25.0 3.0 20.0	\$0.00 \$0.02 \$0.00 \$0.01 \$0.01 \$0.00 \$0.00	0.15 0.15 0.05 0.05 0.03 0.03 0.05	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	0 0 0 0 0 0
132 Industria 133 Industria 134 Industria 135 Industria 136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 144 Industria 145 Industria	trial Electronics trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal	PH PUmps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Air Curtains (Dryer) Air Curtains (Oven) Insulation (Dryer) Insulation (Oven) Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh	Retrofit	20.0 20.0 15.0 15.0 25.0 3.0 3.0 20.0	20.0 20.0 15.0 15.0 25.0 3.0 20.0	\$0.00 \$0.02 \$0.00 \$0.01 \$0.01 \$0.00 \$0.00	0.15 0.15 0.05 0.05 0.03 0.03 0.05	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	0 0 0 0 0 0
133 Industria 134 Industria 135 Industria 136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 144 Industria 145 Industria	trial Electronics trial Fabricated Metal	PH PH PH PH PH PH PH PH PH Pumps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Air Curtains (Oven) Insulation (Dryer) Insulation (Oven) Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh	Retrofit	20.0 15.0 15.0 25.0 3.0 3.0 20.0	20.0 15.0 15.0 25.0 3.0 3.0 20.0	\$0.02 \$0.00 \$0.01 \$0.01 \$0.00 \$0.00	0.15 0.05 0.05 0.03 0.03 0.05	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0 0 0 0	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	0 0 0 0
134 Industria 135 Industria 136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal	PH PH PH PH PH PH PH PH Pumps Pumps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Insulation (Dryer) Insulation (Oven) Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh	Retrofit	15.0 15.0 25.0 3.0 3.0 20.0 15.0	15.0 15.0 25.0 3.0 3.0 20.0	\$0.00 \$0.01 \$0.01 \$0.00 \$0.00	0.05 0.05 0.03 0.05 0.05	0.0000 0.0000 0.0000 0.0000 0.0000	0 0 0 0 0 0 0 0	0 0 0 0 0	0.0000 0.0000 0.0000 0.0000 0.0000	0 0 0
136 Industria 137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Fabricated Metal	PH PH PH PH Pumps Pumps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Optimized Distribution System Preventative Dryer Maintenance Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh	Retrofit Retrofit Retrofit Retrofit Retrofit Retrofit Retrofit	25.0 3.0 3.0 20.0 15.0	25.0 3.0 3.0 20.0	\$0.01 \$0.00 \$0.00	0.03 0.05 0.05	0.0000 0.0000 0.0000	0 0 0	0 0 0 0	0.0000 0.0000 0.0000	0 0
137 Industria 138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Fabricated Metal	PH PH PH Pumps Pumps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Preventative Dryer Maintenance Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh Per kWh Per kWh Per kWh Per kWh Per kWh	Retrofit Retrofit Retrofit Retrofit Retrofit Retrofit	3.0 3.0 20.0 15.0	3.0 3.0 20.0	\$0.00 \$0.00	0.05 0.05	0.0000 0.0000	0 0	0 0	0.0000 0.0000	0
138 Industria 139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Fabricated Metal	PH PH Pumps Pumps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh Per kWh Per kWh Per kWh Per kWh	Retrofit Retrofit Retrofit Retrofit	3.0 20.0 15.0	3.0 20.0	\$0.00	0.05	0.0000	0	0	0.0000	0
139 Industria 140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Fabricated Metal	PH Pumps Pumps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Process Heat Recovery to Preheat Makeup Water Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh Per kWh Per kWh Per kWh	Retrofit Retrofit Retrofit	20.0 15.0	20.0	·			0	0		/ 11
140 Industria 141 Industria 142 Industria 143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Electronics trial Electronics trial Electronics trial Electronics trial Electronics trial Fabricated Metal	Pumps Pumps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Improve Pump Components Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh Per kWh Per kWh	Retrofit Retrofit	15.0								0
141 Industria 142 Industria 143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Electronics trial Electronics trial Electronics trial Electronics trial Fabricated Metal	Pumps Pumps Pumps Pumps Pumps Compressed Air Compressed Air	Match Pump Size to Load Operation and Maintenance Reduce or Control Pump Speed Reduce Overall System Requirements	Per kWh Per kWh	Retrofit			·	0.00	1	0	0	0.0000	
143 Industria 144 Industria 145 Industria 146 Industria	trial Electronics trial Electronics trial Fabricated Metal	Pumps Pumps Compressed Air Compressed Air	Reduce or Control Pump Speed Reduce Overall System Requirements	-	Retrofit		15.0		0.20	1	0	0	0.0000	0
144 Industria 145 Industria 146 Industria	trial Electronics trial Fabricated Metal	Pumps Compressed Air Compressed Air	Reduce Overall System Requirements	Per kWh		3.0	3.0	\$0.00	0.02	0.0000	0	0	0.0000	0
145 Industria 146 Industria	trial Fabricated Metal	Compressed Air Compressed Air	, ,		Retrofit	15.0	15.0	·	0.30		0	0	0.0000	0
146 Industria	trial Fabricated Metal trial Fabricated Metal trial Fabricated Metal	Compressed Air		Per kWh	Retrofit	3.0	3.0		0.10		0	0	0.0000	0
	trial Fabricated Metal trial Fabricated Metal	•	Compressor Control	Per kWh	Retrofit	15.0	15.0		0.10		0	0	0.0000	0
147 IIIddatii	trial Fabricated Metal	Compressed Air	Improve Compressor Components Match Compressor Size to Load	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0		0.05 0.03		0	0	0.0000	0
148 Industria		-	Operation and Maintenance	Per kWh	Retrofit	3.0	3.0		0.10		0	0	0.0000	
	trial Fabricated Metal		Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0		0.20		0	0	0.0000	0
150 Industria	trial Fabricated Metal	Fans	Improve Fan Components	Per kWh	Retrofit	15.0	15.0	\$0.03	0.05	0.0000	0	0	0.0000	0
151 Industria			Operation and Maintenance	Per kWh	Retrofit	3.0	3.0	·	0.02		0	0	0.0000	0
	trial Fabricated Metal		Reduce or Control Fan Speed	Per kWh	Retrofit	15.0	15.0	·	0.20	1	0	0	0.0000	0
	trial Fabricated Metal		Reduce Overall System Requirements	Per kWh	Retrofit	15.0 16.0	15.0 16.0	·	0.10		0	0	0.0000	0
154 Industria	trial Fabricated Metal trial Fabricated Metal	· -	Efficient Lighting Design High efficiency ballasts for lighting	Per kWh Per kWh	Retrofit Retrofit	11.0	11.0	·	0.15 0.25		0	0	0.0000	0
	trial Fabricated Metal		High Efficiency Light fixtures	Per kWh	Retrofit	16.0	16.0		0.45		0	0	0.0000	
157 Industria			Lighting controls: occupancy sensors	Per kWh	Retrofit	8.0	8.0		0.15		0	0	0.0000	0
158 Industria	trial Fabricated Metal	FL	Lighting controls: on/off timer settings	Per kWh	Retrofit	8.0	8.0		0.15		0	0	0.0000	0
	trial Fabricated Metal		Air Source Heat Pump for Backup Generators	Per kWh	Retrofit	15.0	15.0		0.68	1	0	0	0.0000	0
160 Industria			Automated Temperature Control	Per kWh	Retrofit	25.0	25.0	·	0.07		0	0	0.0000	0
161 Industria	trial Fabricated Metal trial Fabricated Metal		Destratification Fans Ground Source Heat Pump	Per kWh Per kWh	Retrofit Retrofit	20.0 20.0	20.0 20.0	·	0.08 0.51		0	0	0.0000	0
163 Industria			Heat Recovery from Processes to Heat Ventilation Make-up Air	Per kWh	Retrofit	15.0	15.0		0.31		0	0	0.0000	
164 Industria			High efficiency non-packaged HVAC equipment	Per kWh	Retrofit	20.0	20.0	·	0.25		0	0	0.0000	0
165 Industria	trial Fabricated Metal		High-efficiency rooftop AC with an EER of 13.5	Per kWh	Retrofit	15.0	15.0	\$0.04	0.17	0.0000	0	0	0.0000	0
166 Industria			Optimized duct design to improve efficiency	Per kWh	Retrofit	15.0	15.0		0.05		0	0	0.0000	0
167 Industria			Preventative Packaged HVAC Maintenance	Per kWh	Retrofit	3.0	3.0	*	0.05	1	0	0	0.0000	0
168 Industria	trial Fabricated Metal trial Fabricated Metal		Radiant Heaters	Per kWh	Retrofit Retrofit	20.0	20.0 3.0		0.10 0.07		0	0	0.0000	0
	trial Fabricated Metal		Reduced Temperature Settings Seasonal Temperature Settings Adjustments	Per kWh	Retrofit	3.0			0.07		0	0	0.0000	0
	trial Fabricated Metal		Ventilation Heat Recovery	Per kWh	Retrofit	20.0	20.0	70.00	0.20		0	0	0.0000	
	trial Fabricated Metal		Warehouse Loading Dock Seals	Per kWh	Retrofit	10.0	10.0		0.05		0	0	0.0000	0
173 Industria	trial Fabricated Metal	Motor - Other	Match Motor Size to Load	Per kWh	Retrofit	15.0	15.0	\$0.01	0.01	0.0000	0	0	0.0000	0
174 Industria			Motor Efficiency Upgrade	Per kWh	Retrofit	15.0	15.0		0.02		0	0	0.0000	0
	trial Fabricated Metal		Operations and maintenance		Retrofit	3.0	3.0 15.0		0.05	1	0	0	0.0000	0
	trial Fabricated Metal trial Fabricated Metal		Variable Speed Drives High efficiency battery charger (for forklifts)	Per kWh Per kWh	Retrofit Retrofit	15.0 20.0	15.0 20.0		0.20 0.10	1	0	0	0.0000	0
	trial Fabricated Metal	OPU	HE Dry-Type Transformers	Per kWh	Retrofit	30.0	30.0		0.10	1	0	0	0.0000	0
179 Industria			Doors, Covers and Curtains	Per kWh	Retrofit	5.0	5.0		0.07		0	0	0.0000	0
	trial Fabricated Metal	PCR	Floating head pressure controls	Per kWh	Retrofit	15.0	15.0	\$0.00	0.07		0	0	0.0000	0
	trial Fabricated Metal		Free-cooling	Per kWh	Retrofit	12.0	12.0		0.21		0	0	0.0000	0
	trial Fabricated Metal		High Efficiency Chiller	Per kWh	Retrofit	20.0	20.0		0.19		0	0	0.0000	0
	trial Fabricated Metal	PCR	Improve insulation of refrigeration system	Per kWh	Retrofit	10.0	10.0	·	0.05		0	0	0.0000	0
	trial Fabricated Metal trial Fabricated Metal		Optimized chilled water temperature and/or optimized condenser temperature Optimized condenser pressure	Per kWh Per kWh	Retrofit Retrofit	3.0	3.0		0.02	1	0	0	0.0000	0
	trial Fabricated Metal		Premium efficiency refrigeration control system	Per kWh	Retrofit	15.0	15.0	·	0.06		0	0	0.0000	0
187 Industria			Preventative refrigeration/cooling system maintenance	Per kWh	Retrofit	3.0	3.0	·	0.05		0	0	0.0000	0
188 Industria			Smart Defrost Controls	Per kWh	Retrofit	16.0	16.0		0.10	1	0	0	0.0000	0
189 Industria			Advanced water heater controls	Per kWh	Retrofit	20.0	20.0		0.03		0	0	0.0000	0
	trial Fabricated Metal		Air Curtains (Dryer)	Per kWh	Retrofit	20.0	20.0		0.15		0	0	0.0000	0
	trial Fabricated Metal		Air Curtains (Oven)	Per kWh	Retrofit	20.0	20.0		0.15	1	0	0	0.0000	0
	trial Fabricated Metal trial Fabricated Metal		Insulation (Dryer) Insulation (Oven)	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0		0.05 0.05		0	0	0.0000	0
	trial Fabricated Metal		Optimized Distribution System	Per kWh	Retrofit	25.0	25.0		0.03		0	0	0.0000	0
	trial Fabricated Metal		Preventative Dryer Maintenance	Per kWh	Retrofit	3.0			0.05		0	0	0.0000	0

ELECTRONICALLY

FILED

2019

October

 \sim

1:00

PM

SCPSC

Docket

#

2019-239-E

Page

4

앜

				MEASURE DESCRIPTION							MEASURE INCR	EMENTAL SAV	INGS PER UNIT	<u> </u>	
Measure ID	Sector	Sub-Sector	End Use	Measure Name	Measure Unit Name	Retrofit (RET), Replace-on- Burnout (ROB), or New Construction (NEW)	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost (per kWh usage)	Annual kWh Savings (percent of usage)	Annual kW Coincident Peak Savings (percent of usage)	Annual Gas Savings (Therms) (percent of usage)	Annual kWh Increases (percent of usage)	Annual kW Coincident Peak Increases (percent of usage)	Annual Gas Therms Increase (percent of usage)
261			Compressed Air	Compressor Control	Per kWh	Retrofit	15.0	15.0		0.10	0.0000	0	0	0.0000	0
262	Industrial	ŭ		Improve Compressor Components	Per kWh	Retrofit	15.0	15.0		0.05		0	0	0.0000	0
263		· ·		Match Compressor Size to Load	Per kWh	Retrofit	15.0	15.0		0.03	0.0000	0	0	0.0000	0
264 265		Industrial Organic Chemicals Industrial Organic Chemicals		Operation and Maintenance Reduce Overall System Requirements	Per kWh Per kWh	Retrofit Retrofit	3.0 15.0	3.0 15.0		0.10 0.20	0.0000 0.0000	0	0	0.0000	0
266		Industrial Organic Chemicals		Improve Fan Components	Per kWh	Retrofit	15.0	15.0		0.20		0	0	0.0000	
267	Industrial			Operation and Maintenance	Per kWh	Retrofit	3.0	3.0		0.02		0	0	0.0000	0
268	Industrial			Reduce or Control Fan Speed	Per kWh	Retrofit	15.0	15.0	\$0.00	0.20	0.0000	0	0	0.0000	0
269	Industrial	Industrial Organic Chemicals	Fans	Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0		0.10	0.0000	0	0	0.0000	0
270	Industrial	Industrial Organic Chemicals		Efficient Lighting Design	Per kWh	Retrofit	16.0	16.0		0.15		0	0	0.0000	0
271		Industrial Organic Chemicals		High efficiency ballasts for lighting	Per kWh	Retrofit	11.0	11.0		0.25		0	0	0.0000	0
272 273		Industrial Organic Chemicals Industrial Organic Chemicals		High Efficiency Light fixtures Lighting controls: occupancy sensors	Per kWh Per kWh	Retrofit Retrofit	16.0 8.0	16.0 8.0		0.45 0.15		0	0	0.0000 0.0000	0
274	Industrial	Industrial Organic Chemicals		Lighting controls: occupancy sensors Lighting controls: on/off timer settings	Per kWh	Retrofit	8.0	8.0		0.15		0	0	0.0000	0
275		· ·		Air Curtains	Per kWh	Retrofit	15.0	15.0		0.03	0.0000	0	0	0.0000	0
276	Industrial		HVAC	Air Source Heat Pump for Backup Generators	Per kWh	Retrofit	15.0	15.0		0.68	0.0001	0	0	0.0000	0
277		Ü		Automated Temperature Control	Per kWh	Retrofit	25.0	25.0		0.07	0.0000	0	0	0.0000	0
278		Ŭ		Destratification Fans	Per kWh	Retrofit	20.0	20.0	<u> </u>	0.08		0	0	0.0000	0
279	Industrial	Ü		Free cooling	Per kWh	Retrofit	15.0 20.0	15.0	·	0.53		0	0	0.0000	0
280 281	Industrial Industrial	Industrial Organic Chemicals Industrial Organic Chemicals	_	Ground Source Heat Pump Heat Recovery from Processes to Heat Ventilation Make-up Air	Per kWh Per kWh	Retrofit Retrofit	15.0	20.0 15.0		0.51 0.15		0	0	0.0000 0.0000	- 0
282		Industrial Organic Chemicals		High efficiency non-packaged HVAC equipment	Per kWh	Retrofit	20.0	20.0		0.13		0	0	0.0000	
283	Industrial	Industrial Organic Chemicals		High-efficiency rooftop AC with an EER of 13.5	Per kWh	Retrofit	15.0	15.0		0.17	0.0000	0	0	0.0000	0
284	Industrial	•		Optimized duct design to improve efficiency	Per kWh	Retrofit	15.0	15.0	\$0.09	0.05	0.0000	0	0	0.0000	0
285	Industrial		HVAC	Preventative Packaged HVAC Maintenance	Per kWh	Retrofit	3.0	3.0	·	0.05		0	0	0.0000	0
286	Industrial			Radiant Heaters	Per kWh	Retrofit	20.0	20.0	<u> </u>	0.10	0.0000	0	0	0.0000	0
287		Industrial Organic Chemicals		Reduced Temperature Settings	Per kWh	Retrofit	3.0	3.0		0.07	0.0000	0	0	0.0000	0
288 289		Industrial Organic Chemicals Industrial Organic Chemicals		Seasonal Temperature Settings Adjustments Ventilation Heat Recovery	Per kWh Per kWh	Retrofit Retrofit	3.0 20.0	3.0 20.0		0.07 0.20	0.0000 0.0000	0	0	0.0000 0.0000	0
290		ŭ		Warehouse Loading Dock Seals	Per kWh	Retrofit	10.0	10.0	·	0.20		0	0	0.0000	
291	Industrial	ŭ		Match Motor Size to Load	Per kWh	Retrofit	15.0	15.0		0.01		0	0	0.0000	0
292	Industrial			Motor Efficiency Upgrade	Per kWh	Retrofit	15.0	15.0		0.02		0	0	0.0000	0
293	Industrial			Operations and maintenance	Per kWh	Retrofit	3.0	3.0		0.05		0	0	0.0000	0
294	Industrial	ŭ		Variable Speed Drives	Per kWh	Retrofit	15.0	15.0		0.20	0.0000	0	0	0.0000	0
295	Industrial	· ·	Pumps	Improve Pump Components	Per kWh	Retrofit	15.0	15.0 15.0		0.05 0.20	0.0000 0.0000	0	0	0.0000 0.0000	0
296 297		•		Match Pump Size to Load Operation and Maintenance	Per kWh Per kWh	Retrofit Retrofit	15.0 3.0	3.0		0.20		0	0	0.0000	
298	Industrial			Reduce or Control Pump Speed	Per kWh	Retrofit	15.0	15.0		0.30	0.0000	0	0	0.0000	
299	Industrial	Industrial Organic Chemicals		Reduce Overall System Requirements	Per kWh	Retrofit	3.0	3.0		0.10	0.0000	0	0	0.0000	0
300	Industrial	Machinery		Compressor Control	Per kWh	Retrofit	15.0	15.0	\$0.01	0.10	0.0000	0	0	0.0000	0
301				Improve Compressor Components	Per kWh	Retrofit	15.0	15.0		0.05		0	0	0.0000	0
302		Machinery		Match Compressor Size to Load	Per kWh	Retrofit	15.0	15.0		0.03		0	0	0.0000	0
303 304		Machinery Machinery		Operation and Maintenance Reduce Overall System Requirements	Per kWh Per kWh	Retrofit Retrofit	3.0 15.0	3.0 15.0		0.10 0.20		0	0	0.0000	0
305	Industrial	Machinery	Fans	Improve Fan Components	Per kWh	Retrofit	15.0	15.0		0.20		0	0	0.0000	0
306		Machinery		Operation and Maintenance	Per kWh	Retrofit	3.0	3.0		0.02		0	0	0.0000	0
307		Machinery		Reduce or Control Fan Speed	Per kWh	Retrofit	15.0	15.0		0.20		0	0	0.0000	0
308		Machinery	Fans	Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0		0.10		0	0	0.0000	0
309		Machinery		Efficient Lighting Design	Per kWh	Retrofit	16.0	16.0		0.15		0	0	0.0000	0
310		macrimory		High efficiency ballasts for lighting	Per kWh	Retrofit	11.0	11.0		0.25		0	0	0.0000	0
311 312		Machinery Machinery		High Efficiency Light fixtures Lighting controls: occupancy sensors	Per kWh Per kWh	Retrofit Retrofit	16.0 8.0	16.0 8.0		0.45 0.15		0	0	0.0000 0.0000	0
313		,		Lighting controls: occupancy sensors Lighting controls: on/off timer settings	Per kWh	Retrofit	8.0	8.0		0.15		0	0	0.0000	0
314		Machinery		Air Source Heat Pump for Backup Generators		Retrofit	15.0	15.0		0.68		0	0	0.0000	0
315				Automated Temperature Control		Retrofit	25.0	25.0		0.07		0	0	0.0000	0
316	Industrial	Machinery	HVAC	Destratification Fans	Per kWh	Retrofit	20.0	20.0	\$0.02	0.08	0.0000	0	0	0.0000	0
317		,		Ground Source Heat Pump		Retrofit	20.0	20.0		0.51		0	0	0.0000	0
318				Heat Recovery from Processes to Heat Ventilation Make-up Air	Per kWh	Retrofit	15.0	15.0		0.15		0	0	0.0000	0
319				High efficiency non-packaged HVAC equipment	Per kWh	Retrofit	20.0	20.0		0.25		0	0	0.0000	0
320 321		Machinery Machinery		High-efficiency rooftop AC with an EER of 13.5 Optimized duct design to improve efficiency	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0		0.17 0.05		0	0	0.0000 0.0000	0
321		Machinery		Preventative Packaged HVAC Maintenance	Per kWh	Retrofit	3.0			0.05		<u> </u>	0	0.0000	
323		Machinery		Radiant Heaters	Per kWh	Retrofit	20.0	20.0		0.10		0	0	0.0000	0
324		Machinery		Reduced Temperature Settings	Per kWh	Retrofit	3.0	3.0		0.07		0	0	0.0000	0
325	Industrial	Machinery	HVAC	Seasonal Temperature Settings Adjustments	Per kWh	Retrofit	3.0	3.0	\$0.00	0.07	0.0000	0	0	0.0000	0

				MEASURE DESCRIPTION							MEASURE INCF	REMENTAL SAV	INGS PER UNIT		
Measure ID		Sub-Sector	End Use	Measure Name	Measure Unit Name	(ROB), or New Construction (NEW)	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost (per kWh usage)	usage)	Annual kW Coincident Peak Savings (percent of usage)	Annual Gas Savings (Therms) (percent of usage)	Annual kWh Increases (percent of usage)	Annual kW Coincident Peak Increases (percent of usage)	Annual Gas Therms Increase (percent of usage)
326	Industrial Machiner	<u>, </u>	HVAC	Ventilation Heat Recovery	Per kWh	Retrofit	20.0 10.0	20.0 10.0			1	0	0	0.0000	0
327 328	Industrial Machiner Industrial Machiner	,	HVAC Motor - Other	Warehouse Loading Dock Seals Match Motor Size to Load	Per kWh	Retrofit Retrofit	15.0	15.0	· · · · · · · · · · · · · · · · · · ·	0.03		0	0	0.0000	0
329	Industrial Machiner	,	Motor - Other	Motor Efficiency Upgrade	Per kWh	Retrofit	15.0	15.0	· · · · · · · · · · · · · · · · · · ·			0	0	0.0000	0
330	Industrial Machiner	ery	Motor - Other	Operations and maintenance	Per kWh	Retrofit	3.0	3.0			1	0	0	0.0000	0
331	Industrial Machiner	<u>, </u>	Motor - Other	Variable Speed Drives	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
332 333	Industrial Machiner Industrial Machiner	,	ONPU OPU	High efficiency battery charger (for forklifts) HE Dry-Type Transformers	Per kWh Per kWh	Retrofit Retrofit	20.0 30.0	20.0 30.0		0.10	0.0000	0	0	0.0000	0
334	Industrial Machiner	<u>, </u>	PCR	Doors, Covers and Curtains	Per kWh	Retrofit	5.0	5.0				0	0	0.0000	0
335	Industrial Machiner	ery	PCR	Floating head pressure controls	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
336	Industrial Machiner	<u>, </u>	PCR	Free-cooling	Per kWh	Retrofit	12.0	12.0	·			0	0	0.0000	0
337 338	Industrial Machiner Industrial Machiner	,	PCR PCR	High Efficiency Chiller Improve insulation of refrigeration system	Per kWh Per kWh	Retrofit Retrofit	20.0 10.0	20.0 10.0				0	0	0.0000	0
339	Industrial Machiner	•	PCR	Optimized chilled water temperature and/or optimized condenser temperature	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
340	Industrial Machiner	ery	PCR	Optimized condenser pressure	Per kWh	Retrofit	3.0	3.0	\$0.00	0.06	0.0000	0	0	0.0000	0
341	Industrial Machiner	,	PCR	Premium efficiency refrigeration control system	Per kWh	Retrofit	15.0	15.0			1	0	0	0.0000	0
342 343	Industrial Machiner Industrial Machiner	,	PCR PCR	Preventative refrigeration/cooling system maintenance Smart Defrost Controls	Per kWh Per kWh	Retrofit Retrofit	3.0 16.0	3.0 16.0	· · · · · · · · · · · · · · · · · · ·			0	0	0.0000	0
344	Industrial Machiner	,	PH	Advanced water heater controls	Per kWh	Retrofit	20.0	20.0		0.03		0	0	0.0000	0
345	Industrial Machiner	•	PH	Air Curtains (Dryer)	Per kWh	Retrofit	20.0	20.0			1	0	0	0.0000	0
346	Industrial Machiner	,	PH	Air Curtains (Oven)	Per kWh	Retrofit	20.0	20.0	· · · · · · · · · · · · · · · · · · ·			0	0	0.0000	0
347	Industrial Machiner	<u>, </u>	PH	Insulation (Dryer)	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
348 349	Industrial Machiner Industrial Machiner	,	PH PH	Insulation (Oven) Optimized Distribution System	Per kWh Per kWh	Retrofit Retrofit	15.0 25.0	15.0 25.0		0.05	1	0	0	0.0000	0
350	Industrial Machiner	,	PH	Preventative Dryer Maintenance	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
351	Industrial Machiner	ery	PH	Preventative Oven Maintenance	Per kWh	Retrofit	3.0	3.0			1	0	0	0.0000	0
352	Industrial Machiner	,	PH	Process Heat Recovery to Preheat Makeup Water	Per kWh	Retrofit	20.0	20.0	· · · · · · · · · · · · · · · · · · ·			0	0	0.0000	0
353 354	Industrial Machiner Industrial Machiner	,	Pumps Pumps	Improve Pump Components Match Pump Size to Load	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0	· · · · · · · · · · · · · · · · · · ·		1	0	0	0.0000	0
355	Industrial Machiner	,	Pumps	Operation and Maintenance	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
356	Industrial Machiner	<u>, </u>	Pumps	Reduce or Control Pump Speed	Per kWh	Retrofit	15.0	15.0		0.30	1	0	0	0.0000	0
357	Industrial Machiner	<u>, </u>	Pumps	Reduce Overall System Requirements	Per kWh	Retrofit	3.0	3.0			0.0000	0	0	0.0000	0
358	Industrial Petroleur		Compressed Air Compressed Air	Compressor Compressor Compressor	Per kWh	Retrofit	15.0	15.0		0.10	0.0000	0	0	0.0000	0
359 360		m Refining m Refining	Compressed Air	Improve Compressor Components Match Compressor Size to Load	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0				0	0	0.0000	0
361		m Refining		Operation and Maintenance	Per kWh	Retrofit	3.0	3.0			1	0	0	0.0000	0
362		m Refining	Compressed Air	Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
363		m Refining	Fans	Improve Fan Components	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
364 365	Industrial Petroleur		Fans Fans	Operation and Maintenance Reduce or Control Fan Speed	Per kWh Per kWh	Retrofit Retrofit	3.0 15.0	3.0 15.0			1	0	0	0.0000	0
366	Industrial Petroleur		Fans	Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0	*			0	0	0.0000	0
367	Industrial Petroleur		FL	Efficient Lighting Design	Per kWh	Retrofit	16.0	16.0				0	0	0.0000	0
	Industrial Petroleur	•	FL	High efficiency ballasts for lighting	Per kWh	Retrofit	11.0	11.0				0	0	0.0000	0
369 370	Industrial Petroleur Industrial Petroleur		FL FL	High Efficiency Light fixtures Lighting controls: occupancy sensors	Per kWh Per kWh	Retrofit Retrofit	16.0 8.0	16.0 8.0		0.45 0.15		0	0	0.0000	0
371	Industrial Petroleur		FL	Lighting controls: or/off timer settings	Per kWh	Retrofit	8.0	8.0				0	0	0.0000	0
372	Industrial Petroleur	m Refining	HVAC	Air Curtains	Per kWh	Retrofit	15.0	15.0		0.03	0.0000	0	0	0.0000	0
	Industrial Petroleur		HVAC	Air Source Heat Pump for Backup Generators	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
374 375	Industrial Petroleur Industrial Petroleur	- 3	HVAC HVAC	Automated Temperature Control Destratification Fans	Per kWh Per kWh	Retrofit Retrofit	25.0 20.0	25.0 20.0				0	0	0.0000 0.0000	0
376	Industrial Petroleur		HVAC	Free cooling	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
	Industrial Petroleur		HVAC	Ground Source Heat Pump	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
378	Industrial Petroleur		HVAC	Heat Recovery from Processes to Heat Ventilation Make-up Air	Per kWh	Retrofit	15.0	15.0	\$3.34	0.15		0	0	0.0000	0
	Industrial Petroleur		HVAC	High efficiency non-packaged HVAC equipment	Per kWh	Retrofit	20.0	20.0 15.0				0	0	0.0000	0
380 381	Industrial Petroleur Industrial Petroleur		HVAC HVAC	High-efficiency rooftop AC with an EER of 13.5 Optimized duct design to improve efficiency	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0				0	0	0.0000	0
382	Industrial Petroleur		HVAC	Preventative Packaged HVAC Maintenance	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
	Industrial Petroleur		HVAC	Radiant Heaters	Per kWh	Retrofit	20.0	20.0	\$1.72	0.10	0.0000	0	0	0.0000	0
383	industrial i etroleur		110/40	Reduced Temperature Settings	Per kWh	Retrofit	3.0	3.0		0.07	0.0000	0	0	0.0000	0
384	Industrial Petroleur	•	HVAC	·		D - 1 "						-	-	2	
384 385	Industrial Petroleur Industrial Petroleur	m Refining	HVAC	Seasonal Temperature Settings Adjustments	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
384 385 386	Industrial Petroleur Industrial Petroleur Industrial Petroleur	m Refining m Refining		Seasonal Temperature Settings Adjustments Ventilation Heat Recovery		Retrofit Retrofit Retrofit	20.0	3.0 20.0 10.0	\$0.88	0.20	0.0000	0 0 0	0	0.0000 0.0000 0.0000	0
384 385	Industrial Petroleur Industrial Petroleur	m Refining m Refining m Refining	HVAC HVAC HVAC	Seasonal Temperature Settings Adjustments	Per kWh Per kWh	Retrofit		20.0	\$0.88 \$0.05	0.20 0.05	0.0000 0.0000	0 0 0	0 0 0	0.0000	0 0
384 385 386 387 388 389	Industrial Petroleur Industrial Petroleur Industrial Petroleur Industrial Petroleur	m Refining Im Refining Im Refining Im Refining Im Refining Im Refining	HVAC HVAC HVAC Motor - Other	Seasonal Temperature Settings Adjustments Ventilation Heat Recovery Warehouse Loading Dock Seals	Per kWh Per kWh Per kWh	Retrofit Retrofit	20.0 10.0	20.0 10.0	\$0.88 \$0.05 \$0.01 \$0.02	0.20 0.05 0.01 0.02	0.0000 0.0000 0.0000	0 0 0 0	0 0 0 0	0.0000 0.0000	0 0 0 0

				MEASURE DESCRIPTION							MEASURE INC	REMENTAL SAV	INGS PER UNIT	•	
Measure ID	Sector	Sub-Sector	End Use	Measure Name	Measure Unit Name	(ROB), or New Construction (NEW)	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost (per kWh usage)	usage)	Annual kW Coincident Peak Savings (percent of usage)	Annual Gas Savings (Therms) (percent of usage)	Annual kWh Increases (percent of usage)	Annual kW Coincident Peak Increases (percent of usage)	Annual Gas Therms Increase (percent of usage)
391		Petroleum Refining	Motor - Other	Variable Speed Drives	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
392 393		Petroleum Refining Petroleum Refining	Pumps Pumps	Improve Pump Components Match Pump Size to Load	Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0				0	0	0.0000	0
394		Petroleum Refining	Pumps	Operation and Maintenance	Per kWh	Retrofit	3.0	3.0	+			0	0	0.0000	0
395	Industrial	Petroleum Refining	Pumps	Reduce or Control Pump Speed	Per kWh	Retrofit	15.0	15.0		0.30		0	0	0.0000	0
396		Petroleum Refining	Pumps	Reduce Overall System Requirements	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
397 398		Plastics & Polymers Plastics & Polymers	Compressed Air Compressed Air	Minimize operating air pressure Optimized Distribution System	Per kWh Per kWh	Retrofit Retrofit	1.0 10.0	1.0 10.0		0.20	0.0000	0	0	0.0000 0.0000	<u> </u>
399		Plastics & Polymers	Compressed Air	Optimized bistribution dystern Optimized sizing of compressor system	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
400		Plastics & Polymers	Compressed Air	Premium efficiency ASD compressor	Per kWh	Retrofit	10.0	10.0				0	0	0.0000	0
401		Plastics & Polymers	Fans	Impeller Trimming or Inlet Guide Vanes	Per kWh	Retrofit	3.0	3.0		0.15		0	0	0.0000	0
402 403		Plastics & Polymers Plastics & Polymers	Fans Fans	Premium efficiency control, with ASD (Fans) Preventative Fan Maintenance	Per kWh Per kWh	Retrofit Retrofit	10.0 3.0	10.0 3.0	+			0	0	0.0000 0.0000	0
404		Plastics & Polymers	Fans	Synchronous Belts (Fans)	Per kWh	Retrofit	10.0	10.0		0.02		0	0	0.0000	0
405		Plastics & Polymers	FL	Efficient Lighting Design	Per kWh	Retrofit	16.0	16.0				0	0	0.0000	0
406		Plastics & Polymers	FL	High efficiency ballasts for lighting	Per kWh	Retrofit	11.0	11.0		0.25		0	0	0.0000	0
407		Plastics & Polymers	FL	High Efficiency Light fixtures	Per kWh	Retrofit	16.0	16.0		0.45		0	0	0.0000	0
408 409		Plastics & Polymers Plastics & Polymers	FL FL	Lighting controls: occupancy sensors Lighting controls: on/off timer settings	Per kWh Per kWh	Retrofit Retrofit	8.0 8.0	8.0 8.0		0.15 0.15		0	0	0.0000 0.0000	0
410		Plastics & Polymers	HVAC	Air Curtains	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
411		Plastics & Polymers	HVAC	Air Source Heat Pump for Backup Generators	Per kWh	Retrofit	15.0	15.0			0.0001	0	0	0.0000	0
412		Plastics & Polymers	HVAC	Automated Temperature Control	Per kWh	Retrofit	25.0	25.0				0	0	0.0000	0
413		Plastics & Polymers	HVAC	Destratification Fans	Per kWh	Retrofit	20.0 15.0	20.0				0	0	0.0000	0
414 415		Plastics & Polymers Plastics & Polymers	HVAC HVAC	Free cooling Ground Source Heat Pump	Per kWh	Retrofit Retrofit	20.0	15.0 20.0		0.53 0.51		0	0	0.0000	0
416		Plastics & Polymers	HVAC	Heat Recovery from Processes to Heat Ventilation Make-up Air	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
417	Industrial	Plastics & Polymers	HVAC	High efficiency non-packaged HVAC equipment	Per kWh	Retrofit	20.0	20.0	\$1.72	0.25	0.0000	0	0	0.0000	0
418		Plastics & Polymers	HVAC	High-efficiency rooftop AC with an EER of 13.5	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
419 420		Plastics & Polymers Plastics & Polymers	HVAC HVAC	Optimized duct design to improve efficiency Preventative Packaged HVAC Maintenance	Per kWh	Retrofit Retrofit	15.0 3.0	15.0 3.0				0	0	0.0000	0
420		Plastics & Polymers	HVAC	Radiant Heaters	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
422		Plastics & Polymers	HVAC	Reduced Temperature Settings	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
423		Plastics & Polymers	HVAC	Seasonal Temperature Settings Adjustments	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
424		Plastics & Polymers	HVAC	Ventilation Heat Recovery	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
425 426		Plastics & Polymers Plastics & Polymers	HVAC Machine Drive	Warehouse Loading Dock Seals Sub-Metering and Interval Metering	Per kWh	Retrofit Retrofit	10.0 15.0	10.0 15.0				0	0	0.0000	0
427		Plastics & Polymers	Motor - Other	Correctly sized motors	Per kWh	Retrofit	15.0	15.0		0.02		0	0	0.0000	0
428		Plastics & Polymers	Motor - Other	High/Premium Efficiency Motors	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
429		Plastics & Polymers	Motor - Other	Premium Efficiency Control with ASDs (Other motors)	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
430		Plastics & Polymers	Motor - Other	Preventative Motor Maintenance	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
431		Plastics & Polymers Plastics & Polymers	ONPU PCR	High efficiency battery charger (for forklifts) Doors, Covers and Curtains	Per kWh Per kWh	Retrofit Retrofit	20.0 5.0	20.0 5.0				0	0	0.0000	0
433		Plastics & Polymers	PCR	Floating head pressure controls	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
434		Plastics & Polymers	PCR	Free-cooling	Per kWh	Retrofit	12.0	12.0				0	0	0.0000	0
435		Plastics & Polymers	PCR	High Efficiency Chiller	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
436 437		Plastics & Polymers Plastics & Polymers	PCR PCR	Improve insulation of refrigeration system Optimized chilled water temperature and/or optimized condenser temperature	Per kWh Per kWh	Retrofit Retrofit	10.0 3.0	10.0 3.0				0	0	0.0000 0.0000	0
438		Plastics & Polymers	PCR	Optimized condenser pressure	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	. 0
439	Industrial	Plastics & Polymers	PCR	Premium efficiency refrigeration control system	Per kWh	Retrofit	15.0	15.0	\$0.13	0.09	0.0000	0	0	0.0000	0
440		Plastics & Polymers	PCR	Preventative refrigeration/cooling system maintenance	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
441		Plastics & Polymers	PCR	Smart Defrost Controls	Per kWh	Retrofit	16.0	16.0				0	0	0.0000	0
442 443		Plastics & Polymers Plastics & Polymers	PCR PH	VSD on chiller compressor Advanced water heater controls	Per kWh Per kWh	Retrofit Retrofit	15.0 20.0	15.0 20.0				0	0	0.0000 0.0000	0
444		Plastics & Polymers	PH	Air Curtains (Dryer)	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
445	Industrial	Plastics & Polymers	PH	Air Curtains (Oven)	Per kWh	Retrofit	20.0	20.0	\$0.02	0.15	0.0000	0	0	0.0000	0
446		Plastics & Polymers	PH	Insulation (Dryer)	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
447		Plastics & Polymers	PH	Insulation (Oven)	Per kWh	Retrofit Retrofit	15.0 25.0	15.0 25.0				0	0	0.0000 0.0000	0
448 449		Plastics & Polymers Plastics & Polymers	PH PH	Optimized Distribution System Preventative Dryer Maintenance	Per kWh Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
450		Plastics & Polymers	PH	Preventative Oven Maintenance	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
451	Industrial	Plastics & Polymers	PH	Process Heat Recovery to Preheat Makeup Water	Per kWh	Retrofit	20.0	20.0	\$0.02	0.06	0.0000	0	0	0.0000	0
452		Plastics & Polymers	Pumps	Impeller Trimming (Pump)	Per kWh	Retrofit	20.0	20.0		0.15		0	0	0.0000	0
453 454		Plastics & Polymers Plastics & Polymers	Pumps	Optimization of pumping system Premium Efficiency Control with ASDs (Pumps)	Per kWh Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0				0	0	0.0000 0.0000	0
454		Plastics & Polymers Plastics & Polymers	Pumps Pumps	Preventative Pump Maintenance	Per kWh	Retrofit	3.0	3.0					0	0.0000	0
100	aastiidi	astros a r styrriors	i unipo	1. 1010a.ro i dirip maintonano	. 01 107711		5.0	5.0	Ψ0.00	5.00	0.0000	ı	ı	0.0000	

				MEASURE DESCRIPTION							MEASURE INC	REMENTAL SAV	INGS PER UNIT	ſ	
Measure ID	Sector	Sub-Sector	End Use	Measure Name	Measure Unit Name	Retrofit (RET), Replace-on- Burnout (ROB), or New Construction (NEW)	Baseline Unit Lifetime (Years)	Efficient Unit Lifetime (Years)	Total Incremental Cost (per kWh usage)	Annual kWh Savings (percent of usage)	Annual kW Coincident Peak Savings (percent of usage)	Annual Gas Savings (Therms) (percent of usage)	Annual kWh Increases (percent of usage)	Annual kW Coincident Peak Increases (percent of usage)	Annual Gas Therms Increase (percent of usage)
			Compressed Air	Eliminate air leaks	Per kWh	Retrofit	3.0	3.0		0.15	0.0000	0	0	0.0000	0
		• • •		Minimize operating air pressure	Per kWh	Retrofit	1.0	1.0		0.20	0.0000	0	0	0.0000	0
458				Optimized Distribution System	Per kWh	Retrofit	10.0	10.0		0.10	0.0000	0	0	0.0000	0
459 460			_	Optimized sizes of air receiver tanks Optimized sizing of compressor system	Per kWh Per kWh	Retrofit Retrofit	10.0 20.0	10.0 20.0		0.12 0.10	0.0000	0	0	0.0000	0
461			•	Premium Efficiency Air Dryer (compressors)	Per kWh	Retrofit	20.0	20.0		0.10	0.0000	0	0	0.0000	0
462				Premium efficiency ASD compressor	Per kWh	Retrofit	10.0	10.0		0.13	0.0000	0	0	0.0000	0
463		Pulp & paper		Premium efficiency ASD compressor	Per kWh	Retrofit	10.0	10.0	\$0.05	0.13	0.0000	0	0	0.0000	0
			_	Replace compressed air use with mechanical or electrical	Per kWh	Retrofit	20.0	20.0		0.56	0.0001	0	0	0.0000	0
465				Sequencing Control	Per kWh	Retrofit Retrofit	5.0 10.0	5.0 10.0		0.10	0.0000	0	0	0.0000	0
466 467				Synchronous Belts for Air Compressors Use cooler air from outside for make up air	Per kWh Per kWh	Retrofit	20.0	20.0		0.02 0.04	0.0000	0	0	0.0000	0
468		• • •	Fans	High/Premium Efficiency Motors (Fans)	Per kWh	Retrofit	15.0	15.0		0.04	0.0000	0	0	0.0000	0
469			Fans	Impeller Trimming or Inlet Guide Vanes	Per kWh	Retrofit	3.0	3.0		0.15	0.0000	0	0	0.0000	0
470			Fans	Premium efficiency control, with ASD (Fans)	Per kWh	Retrofit	10.0	10.0		0.10	0.0000	0	0	0.0000	0
471			Fans	Preventative Fan Maintenance	Per kWh	Retrofit	3.0	3.0		0.02	0.0000	0	0	0.0000	0
472			Fans	Synchronous Belts (Fans)	Per kWh	Retrofit	10.0	10.0		0.20	0.0000	0	0	0.0000	0
473 474			FL FL	Efficient Lighting Design High efficiency ballasts for lighting	Per kWh Per kWh	Retrofit Retrofit	16.0 11.0	16.0 11.0		0.15 0.25	0.0000	0	0	0.0000	0
475		. a., p	FL	High Efficiency Light fixtures	Per kWh	Retrofit	16.0	16.0		0.25	0.0001	0	0	0.0000	0
			FL	Lighting controls: occupancy sensors	Per kWh	Retrofit	8.0	8.0		0.15	0.0000	0	0	0.0000	0
477	Industrial	Pulp & paper	FL	Lighting controls: on/off timer settings	Per kWh	Retrofit	8.0	8.0		0.15	0.0000	0	0	0.0000	0
478			HVAC	Air Curtains	Per kWh	Retrofit	15.0	15.0		0.03	0.0000	0	0	0.0000	0
479			HVAC	Air Source Heat Pump for Backup Generators	Per kWh	Retrofit	15.0	15.0		0.68	0.0001	0	0	0.0000	0
480 481			HVAC HVAC	Automated Temperature Control Destratification Fans	Per kWh Per kWh	Retrofit Retrofit	25.0 20.0	25.0 20.0		0.07 0.08	0.0000	0	0	0.0000	0
482			HVAC	Free cooling	Per kWh	Retrofit	15.0	15.0		0.53	0.0001	0	0	0.0000	0
483		• • •	HVAC	Ground Source Heat Pump	Per kWh	Retrofit	20.0	20.0		0.51	0.0001	0	0	0.0000	0
484	Industrial	Pulp & paper	HVAC	Heat Recovery from Processes to Heat Ventilation Make-up Air	Per kWh	Retrofit	15.0	15.0		0.15	0.0000	0	0	0.0000	0
485			HVAC	High efficiency non-packaged HVAC equipment	Per kWh	Retrofit	20.0	20.0		0.25	0.0000	0	0	0.0000	0
486			HVAC	High-efficiency rooftop AC with an EER of 13.5	Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0		0.17	0.0000	0	0	0.0000	0
487 488			HVAC HVAC	Optimized duct design to improve efficiency Preventative Packaged HVAC Maintenance	Per kWh Per kWh	Retrofit	3.0	3.0		0.05 0.05	0.0000	0	0	0.0000	0
489			HVAC	Radiant Heaters	Per kWh	Retrofit	20.0	20.0		0.10	0.0000	0	0	0.0000	0
490			HVAC	Reduced Temperature Settings	Per kWh	Retrofit	3.0	3.0		0.07	0.0000	0	0	0.0000	0
			HVAC	Seasonal Temperature Settings Adjustments	Per kWh	Retrofit	3.0	3.0		0.07	0.0000	0	0	0.0000	0
492			HVAC	Ventilation Heat Recovery	Per kWh	Retrofit	20.0	20.0		0.20	0.0000	0	0	0.0000	0
493 494			HVAC	Warehouse Loading Dock Seals	Per kWh	Retrofit Retrofit	10.0 10.0	10.0 10.0		0.05 0.08	0.0000	0	0	0.0000	0
			Machine Drive Machine Drive	Integrated control system Sub-Metering and Interval Metering	Per kWh Per kWh	Retrofit	15.0	15.0		0.06	0.0000	0	0	0.0000	0
496		- : - : :	Motor - Other	Correctly sized motors		Retrofit	15.0	15.0		0.02		0	0	0.0000	0
497		• • •	Motor - Other	High/Premium Efficiency Motors	Per kWh	Retrofit	15.0	15.0		0.02	0.0000		0	0.0000	
			Motor - Other	Optimized motor control	Per kWh	Retrofit	15.0	15.0		0.05	0.0000	0	0	0.0000	
				Premium Efficiency Control with ASDs (Other motors)	Per kWh	Retrofit	15.0	15.0		0.20	0.0000	0	0	0.0000	0
500 501			Motor - Other Motor - Other	Preventative Motor Maintenance Synchronous Belts	Per kWh Per kWh	Retrofit Retrofit	3.0 10.0	3.0 10.0		0.05 0.02	0.0000	0	0	0.0000	0
				High efficiency battery charger (for forklifts)	Per kWh	Retrofit	20.0	20.0		0.10	0.0000	0	0	0.0000	
			OPU	HE Dry-Type Transformers	Per kWh	Retrofit	30.0	30.0		0.01	0.0000	0	0	0.0000	
		Pulp & paper	PCR	Doors, Covers and Curtains	Per kWh	Retrofit	5.0	5.0		0.07	0.0000	0	0	0.0000	
			PCR	Floating head pressure controls	Per kWh	Retrofit	15.0	15.0		0.07	0.0000	0	0	0.0000	0
506			PCR	Free-cooling	Per kWh	Retrofit	12.0	12.0		0.21	0.0000	0	0	0.0000	0
			PCR PCR	High Efficiency Chiller Improve insulation of refrigeration system	Per kWh Per kWh	Retrofit Retrofit	20.0 10.0	20.0 10.0		0.19 0.05	0.0000	0	0	0.0000	
				<u> </u>	Per kWh	Retrofit	3.0	3.0		0.03	0.0000	0	0	0.0000	
			PCR	Optimized condenser pressure	Per kWh	Retrofit	3.0	3.0		0.06	0.0000	0	0	0.0000	
511	Industrial	Pulp & paper	PCR	Optimized Distribution System	Per kWh	Retrofit	25.0	25.0	\$0.01	0.03	0.0000	0	0	0.0000	
				Premium efficiency refrigeration control system	Per kWh	Retrofit	15.0	15.0		0.09	0.0000	0	0	0.0000	
			PCR	Preventative refrigeration/cooling system maintenance	Per kWh	Retrofit	3.0	3.0		0.05	0.0000	0	0	0.0000	
			PCR PCR	Smart Defrost Controls VSD on chiller compressor	Per kWh Per kWh	Retrofit Retrofit	16.0 15.0	16.0 15.0		0.10 0.30	0.0000	0	0	0.0000	
			PH		Per kWh	Retrofit	20.0	20.0		0.03	0.0000	0	0	0.0000	
			PH	Air Curtains (Dryer)	Per kWh	Retrofit	20.0	20.0		0.15	0.0000	0	0	0.0000	
				Air Curtains (Oven)	Per kWh	Retrofit	20.0	20.0	\$0.02	0.15	0.0000	0	0	0.0000	0
519			PH	Insulation (Dryer)	Per kWh	Retrofit	15.0	15.0		0.05	0.0000	0	0	0.0000	0
520	Industrial	Pulp & paper	PH	Insulation (Oven)	Per kWh	Retrofit	15.0	15.0	\$0.01	0.05	0.0000	0	0	0.0000	. 0

				MEASURE DESCRIPTION					1		MEASURE INCR	DEMENTAL SAV	/INGS DED LINIT	T	
				MILAGONE DEGONIF HOW		Retrofit (RET),					Annual kW	Annual Gas		Annual kW	Annual Gas
					Manager 11 11	Replace-on-	Baseline Unit	Efficient Unit	Total	Annual kWh	Coincident	Savings	Annual kWh	Coincident	Therms
Measure ID	Sector	Sub-Sector	End Use	Measure Name	Measure Unit Name	Burnout (ROB), or New	Lifetime	Lifetime	Incremental Cost (per kWh	Savings (percent of	Peak Savings	(Therms)	Increases (percent of	Peak Increases	Increase
					Name	Construction	(Years)	(Years)	usage)	usage)	(percent of	(percent of	usage)	(percent of	(percent of
						(NEW)					usage)	usage)	,	" usage)	usage)
521 522		Pulp & paper Pulp & paper		Preventative Dryer Maintenance Preventative Oven Maintenance	Per kWh Per kWh	Retrofit Retrofit	3.0	3.0		0.05 0.05		0	0	0.0000	0
523		Pulp & paper		Process Heat Recovery to Preheat Makeup Water	Per kWh	Retrofit	20.0	20.0		0.05	0.0000	0	0	0.0000	0
524				High/Premium Efficiency Motors (Pumps)	Per kWh	Retrofit	15.0	15.0		0.04	0.0000	0	0	0.0000	0
525		Pulp & paper		Impeller Trimming (Pump)	Per kWh	Retrofit	20.0	20.0		0.15	0.0000	0	0	0.0000	0
526		Pulp & paper		Optimization of pumping system	Per kWh	Retrofit	15.0	15.0		0.14		0	0	0.0000	0
527 528		Pulp & paper		Premium Efficiency Control with ASDs (Pumps) Preventative Pump Maintenance	Per kWh Per kWh	Retrofit Retrofit	15.0 3.0	15.0 3.0		0.20 0.05	0.0000	0	0	0.0000	0
529		Pulp & paper Transportation Equipment	-	Compressor Control	Per kWh	Retrofit	15.0	15.0		0.03	0.0000	0	0	0.0000	0
530	Industrial	Transportation Equipment	Compressed Air	Improve Compressor Components	Per kWh	Retrofit	15.0	15.0		0.05		0	0	0.0000	0
531	Industrial	Transportation Equipment	Compressed Air	Match Compressor Size to Load	Per kWh	Retrofit	15.0	15.0	\$0.02	0.03	0.0000	0	0	0.0000	0
532	Industrial	Transportation Equipment		Operation and Maintenance	Per kWh	Retrofit	3.0	3.0	*	0.10	0.0000	0	0	0.0000	0
533 534	Industrial	Transportation Equipment		Reduce Overall System Requirements	Per kWh	Retrofit Retrofit	15.0 15.0	15.0 15.0		0.20 0.05	0.0000	0	0	0.0000	0
535	Industrial Industrial	Transportation Equipment Transportation Equipment		Improve Fan Components Operation and Maintenance	Per kWh Per kWh	Retrofit	3.0	3.0		0.05		0	0	0.0000	0
536	Industrial	Transportation Equipment		Reduce or Control Fan Speed	Per kWh	Retrofit	15.0	15.0	·	0.20	0.0000	0	0	0.0000	0
537		Transportation Equipment		Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0		0.10		0	0	0.0000	0
538		Transportation Equipment		Efficient Lighting Design	Per kWh	Retrofit	16.0	16.0		0.15		0	0	0.0000	0
539	Industrial	Transportation Equipment		High efficiency ballasts for lighting	Per kWh	Retrofit	11.0	11.0		0.25		0	0	0.0000	0
540 541	Industrial Industrial	Transportation Equipment Transportation Equipment		High Efficiency Light fixtures Lighting controls: occupancy sensors	Per kWh Per kWh	Retrofit Retrofit	16.0 8.0	16.0 8.0		0.45 0.15		0	0	0.0000	0
542		Transportation Equipment		Lighting controls: on/off timer settings	Per kWh	Retrofit	8.0	8.0		0.15		0	0	0.0000	0
543		Transportation Equipment		Air Source Heat Pump for Backup Generators	Per kWh	Retrofit	15.0	15.0		0.68	0.0001	0	0	0.0000	0
544	Industrial	Transportation Equipment	HVAC	Automated Temperature Control	Per kWh	Retrofit	25.0	25.0		0.07	0.0000	0	0	0.0000	0
545	Industrial	Transportation Equipment		Destratification Fans	Per kWh	Retrofit	20.0	20.0		0.08		0	0	0.0000	0
546 547	Industrial	Transportation Equipment		Ground Source Heat Pump	Per kWh	Retrofit	20.0 15.0	20.0 15.0		0.51		0	0	0.0000	0
548	Industrial Industrial	Transportation Equipment Transportation Equipment		Heat Recovery from Processes to Heat Ventilation Make-up Air High efficiency non-packaged HVAC equipment	Per kWh Per kWh	Retrofit Retrofit	20.0	20.0		0.15 0.25		0	0	0.0000	0
549	Industrial	Transportation Equipment		High-efficiency rooftop AC with an EER of 13.5	Per kWh	Retrofit	15.0	15.0		0.17		0	0	0.0000	0
550	Industrial	Transportation Equipment	HVAC	Optimized duct design to improve efficiency	Per kWh	Retrofit	15.0	15.0	\$0.09	0.05	0.0000	0	0	0.0000	0
551		Transportation Equipment		Preventative Packaged HVAC Maintenance	Per kWh	Retrofit	3.0	3.0		0.05		0	0	0.0000	0
552 553	Industrial Industrial	Transportation Equipment Transportation Equipment		Radiant Heaters Reduced Temperature Settings	Per kWh Per kWh	Retrofit Retrofit	20.0 3.0	20.0 3.0	·	0.10 0.07	0.0000	0	0	0.0000	0
554	Industrial	Transportation Equipment		Seasonal Temperature Settings Adjustments	Per kWh	Retrofit	3.0	3.0		0.07	0.0000	0	0	0.0000	0
555	Industrial	Transportation Equipment		Ventilation Heat Recovery	Per kWh	Retrofit	20.0	20.0		0.20	0.0000	0	0	0.0000	0
556	Industrial	Transportation Equipment		Warehouse Loading Dock Seals	Per kWh	Retrofit	10.0	10.0		0.05	0.0000	0	0	0.0000	0
557	Industrial	Transportation Equipment		Match Motor Size to Load	Per kWh	Retrofit	15.0	15.0		0.01		0	0	0.0000	0
558 559	Industrial	Transportation Equipment Transportation Equipment		Motor Efficiency Upgrade Operations and maintenance	Per kWh	Retrofit Retrofit	15.0 3.0	15.0 3.0		0.02 0.05		0	0	0.0000	0
560		Transportation Equipment		Variable Speed Drives	Per kWh	Retrofit	15.0			0.20		0	0		0
561		Transportation Equipment		High efficiency battery charger (for forklifts)	Per kWh	Retrofit	20.0	20.0	\$0.01	0.10	0.0000	0	0	0.0000	0
562		Transportation Equipment		HE Dry-Type Transformers	Per kWh	Retrofit	30.0	30.0		0.01		0	0	0.0000	0
563				Doors, Covers and Curtains	Per kWh	Retrofit	5.0			0.07		0	0	0.0000	0
564 565	Industrial Industrial	Transportation Equipment Transportation Equipment		Floating head pressure controls Free-cooling	Per kWh Per kWh	Retrofit Retrofit	15.0 12.0	15.0 12.0		0.07 0.21		0	0	0.0000	0
566		Transportation Equipment		High Efficiency Chiller	Per kWh	Retrofit	20.0	20.0		0.19		0	0	0.0000	0
567		Transportation Equipment	PCR	Improve insulation of refrigeration system	Per kWh	Retrofit	10.0	10.0		0.05	0.0000	0	0	0.0000	0
568				Optimized chilled water temperature and/or optimized condenser temperature	Per kWh	Retrofit	3.0	3.0		0.02		0	0	0.0000	0
569	Industrial			Optimized condenser pressure	Per kWh	Retrofit	3.0	3.0 15.0		0.06 0.09		0	0	0.0000	0
570 571				Premium efficiency refrigeration control system Preventative refrigeration/cooling system maintenance	Per kWh Per kWh	Retrofit Retrofit	15.0 3.0	3.0		0.09		0	0	0.0000	0
572	Industrial	Transportation Equipment		Smart Defrost Controls	Per kWh	Retrofit	16.0	16.0		0.10		0	0		0
573		Transportation Equipment	PH	Advanced water heater controls	Per kWh	Retrofit	20.0	20.0	\$0.00	0.03	0.0000	0	0	0.0000	0
574		Transportation Equipment		Air Curtains (Dryer)	Per kWh	Retrofit	20.0	20.0		0.15		0	0	0.0000	0
575 576				Air Curtains (Oven) Insulation (Dryer)	Per kWh Per kWh	Retrofit Retrofit	20.0 15.0	20.0 15.0		0.15 0.05		0	0	0.0000	0
577	Industrial			Insulation (Oven)	Per kWh	Retrofit	15.0	15.0		0.05		0	0	0.0000	0
578	Industrial	Transportation Equipment		Optimized Distribution System	Per kWh	Retrofit	25.0	25.0		0.03		0	0	0.0000	0
579	Industrial	Transportation Equipment	PH	Preventative Dryer Maintenance	Per kWh	Retrofit	3.0	3.0	\$0.00	0.05	0.0000	0	0	0.0000	0
580		Transportation Equipment		Preventative Oven Maintenance	Per kWh	Retrofit	3.0	3.0		0.05		0	0	0.0000	0
581 582		Transportation Equipment Transportation Equipment		Process Heat Recovery to Preheat Makeup Water	Per kWh Per kWh	Retrofit Retrofit	20.0 15.0	20.0 15.0		0.06 0.05		0	0	0.0000	0
582	Industrial	Transportation Equipment Transportation Equipment		Improve Pump Components Match Pump Size to Load	Per kWh	Retrofit	15.0	15.0		0.05	0.0000	0	0	0.0000	0
584		Transportation Equipment		Operation and Maintenance	Per kWh	Retrofit	3.0	3.0		0.02		0	0		0
585		Transportation Equipment	Pumps	Reduce or Control Pump Speed	Per kWh	Retrofit	15.0	15.0	\$0.01	0.30	0.0000	0	0	0.0000	0

				MEASURE DESCRIPTION							MEASURE INCR	FMFNTAL SAV	/INGS PER LINIT	•	
				MERIORIE PESONII IION		Retrofit (RET),					Annual kW	Annual Gas		Annual kW	Annual Gas
					Measure Unit	Replace-on-	Baseline Unit	Efficient Unit	Total	Annual kWh Savings	Coincident	Savings	Annual kWh	Coincident	Therms
Measure ID	Sector	Sub-Sector	End Use	Measure Name	Name	Burnout (ROB), or New	Lifetime	Lifetime	Incremental Cost (per kWh	(percent of	Peak Savings	(Therms)	Increases (percent of	Peak Increases	Increase
					, manie	Construction	(Years)	(Years)	usage)	usage)	(percent of	(percent of	usage)	(percent of	(percent of
						(NEW)					usage)	usage)		usage)	usage)
		Transportation Equipment		Reduce Overall System Requirements	Per kWh	Retrofit	3.0 15.0	3.0 15.0		0.10		0	0	0.0000	0
	Industrial Industrial		-	Compressor Control Improve Compressor Components	Per kWh	Retrofit Retrofit	15.0	15.0		0.10 0.05		0	0	0.0000	0
	Industrial			Match Compressor Size to Load	Per kWh	Retrofit	15.0	15.0		0.03	0.0000	0	0	0.0000	0
	Industrial			Operation and Maintenance	Per kWh	Retrofit	3.0	3.0		0.10		0	0	0.0000	0
591	Industrial	Other	Compressed Air	Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0	\$0.00	0.20	0.0000	0	0	0.0000	0
592	Industrial	Other	Fans	Improve Fan Components	Per kWh	Retrofit	15.0	15.0	\$0.03	0.05	0.0000	0	0	0.0000	0
	Industrial			Operation and Maintenance	Per kWh	Retrofit	3.0	3.0		0.02		0	0	0.0000	0
	Industrial			Reduce or Control Fan Speed	Per kWh	Retrofit	15.0	15.0		0.20	0.0000	0	0	0.0000	0
595	Industrial			Reduce Overall System Requirements	Per kWh	Retrofit	15.0	15.0		0.10	0.0000	0	0	0.0000	0
	Industrial Industrial			Efficient Lighting Design	Per kWh	Retrofit Retrofit	16.0 11.0	16.0 11.0		0.15 0.25		0	0	0.0000	0
	Industrial Industrial			High efficiency ballasts for lighting High Efficiency Light fixtures	Per kWh Per kWh	Retrofit	16.0	16.0		0.25		0	0	0.0000	0
	Industrial		. –	Lighting controls: occupancy sensors	Per kWh	Retrofit	8.0	8.0		0.45		0	0	0.0000	- 0
	Industrial			Lighting controls: on/off timer settings	Per kWh	Retrofit	8.0	8.0		0.15		0	0	0.0000	0
	Industrial			Air Source Heat Pump for Backup Generators	Per kWh	Retrofit	15.0	15.0		0.68	0.0001	0	0	0.0000	0
	Industrial			Automated Temperature Control	Per kWh	Retrofit	25.0	25.0		0.07	0.0000	0	0	0.0000	0
	Industrial			Destratification Fans	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
604	Industrial	Other	HVAC	Ground Source Heat Pump	Per kWh	Retrofit	20.0	20.0	\$0.52	0.51	0.0001	0	0	0.0000	0
	Industrial			Heat Recovery from Processes to Heat Ventilation Make-up Air	Per kWh	Retrofit	15.0	15.0		0.15		0	0	0.0000	0
	Industrial			High efficiency non-packaged HVAC equipment	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
	Industrial			High-efficiency rooftop AC with an EER of 13.5	Per kWh	Retrofit	15.0	15.0		0.17	0.0000	0	0	0.0000	0
	Industrial			Optimized duct design to improve efficiency	Per kWh	Retrofit	15.0	15.0		0.05		0	0	0.0000	0
	Industrial			Preventative Packaged HVAC Maintenance	Per kWh	Retrofit	3.0	3.0		0.05		0	0	0.0000	0
	Industrial Industrial			Radiant Heaters	Per kWh	Retrofit Retrofit	20.0 3.0	20.0 3.0		0.10 0.07		0	0	0.0000	0
	Industrial			Reduced Temperature Settings Seasonal Temperature Settings Adjustments	Per kWh Per kWh	Retrofit	3.0	3.0		0.07	0.0000	0	0	0.0000	0
	Industrial		HVAC	Ventilation Heat Recovery	Per kWh	Retrofit	20.0	20.0		0.07	0.0000	0	0	0.0000	- 0
	Industrial			Warehouse Loading Dock Seals	Per kWh	Retrofit	10.0	10.0	*	0.05		0	0	0.0000	
	Industrial			Match Motor Size to Load	Per kWh	Retrofit	15.0	15.0		0.01	0.0000	0	0	0.0000	0
	Industrial			Motor Efficiency Upgrade	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
617	Industrial	Other	Motor - Other	Operations and maintenance	Per kWh	Retrofit	3.0	3.0	\$0.00	0.05	0.0000	0	0	0.0000	0
618	Industrial	Other	Motor - Other	Variable Speed Drives	Per kWh	Retrofit	15.0	15.0	\$0.00	0.20	0.0000	0	0	0.0000	0
619	Industrial	Other		High efficiency battery charger (for forklifts)	Per kWh	Retrofit	20.0	20.0	*	0.10	0.0000	0	0	0.0000	0
620	Industrial			HE Dry-Type Transformers	Per kWh	Retrofit	30.0	30.0		0.01	0.0000	0	0	0.0000	0
	Industrial			Doors, Covers and Curtains	Per kWh	Retrofit	5.0	5.0		0.07		0	0	0.0000	0
	Industrial			Floating head pressure controls	Per kWh	Retrofit	15.0	15.0		0.07		0	0	0.0000	0
	Industrial			Free-cooling	Per kWh	Retrofit	12.0	12.0		0.21	0.0000	0	0	0.0000	0
	Industrial Industrial			High Efficiency Chiller	Per kWh Per kWh	Retrofit Retrofit	20.0 10.0	20.0		0.19 0.05		0	0	0.0000	<u> </u>
	Industrial			Improve insulation of refrigeration system Optimized chilled water temperature and/or optimized condenser temperature	Per kWh	Retrofit	3.0	3.0	¥ 0.00			0	0	0.0000	0
	Industrial			Optimized condenser pressure	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
	Industrial			Premium efficiency refrigeration control system	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
	Industrial			Preventative refrigeration/cooling system maintenance	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
	Industrial			Smart Defrost Controls	Per kWh	Retrofit	16.0	16.0				0	0	0.0000	0
631	Industrial	Other		Advanced water heater controls	Per kWh	Retrofit	20.0	20.0	\$0.00	0.03	0.0000	0	0	0.0000	0
	Industrial			Air Curtains (Dryer)	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
	Industrial			Air Curtains (Oven)	Per kWh	Retrofit	20.0	20.0				0	0	0.0000	0
	Industrial			Insulation (Dryer)	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
	Industrial			Insulation (Oven)	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
	Industrial			Optimized Distribution System	Per kWh	Retrofit	25.0	25.0		0.03		0	0	0.0000	0
	Industrial			Preventative Dryer Maintenance	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0
	Industrial Industrial			Preventative Oven Maintenance	Per kWh	Retrofit Retrofit	3.0 20.0	3.0 20.0		0.05 0.06		0	0	0.0000	<u> </u>
	Industrial			Process Heat Recovery to Preheat Makeup Water Improve Pump Components	Per kWh Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
	Industrial			Match Pump Size to Load	Per kWh	Retrofit	15.0	15.0				0	0	0.0000	0
	Industrial		-	Operation and Maintenance	Per kWh	Retrofit	3.0	3.0					0	0.0000	
	Industrial			Reduce or Control Pump Speed	Per kWh	Retrofit	15.0	15.0		0.30		0	0	0.0000	0
	Industrial			Reduce Overall System Requirements	Per kWh	Retrofit	3.0	3.0				0	0	0.0000	0

	MEASURE DESCRIPTION	MEA	SURE SELECT	ION					APPLICABILIT	Y			
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Measure Inclusion (if Passed Measure	Total Sub- Sector Units	Measure Units per Sub- Sector Unit		Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
1	Compression ratio optimization (gas compressor)	62.60	1	1	151,036,384	1	8.7%	80%	100.0%	100.0%	34%	100.0%	3,576,891
2	Eliminate air leaks	2.88	1	1	151,036,384	1	8.7%	100%	100.0%	100.0%	61%	100.0%	8,021,704
3	Gas compressor right sizing	0.65	0	0									
<u>4</u> 5	Minimize operating air pressure Minimum cylinder clearance	94,310.10 8.27	1	1	151,036,384 151,036,384	1	8.7% 8.7%	80% 60%	100.0%	100.0% 100.0%	61% 44%	100.0%	6,417,363 3,451,963
6	Optimized Distribution System	4.39	1	1	151,036,384	1	8.7%	80%	100.0%	100.0%	81%	100.0%	8,468,815
7	Optimized sizes of air receiver tanks	1.46	1	1	151,036,384	1	8.7%	80%	100.0%	100.0%	45%	100.0%	4,681,519
8	Optimized sizing of compressor system	0.98	0	0									
9	Premium Efficiency Air Dryer (compressors)	1.56	1	1	151,036,384	1	8.7%	80%	100.0%	100.0%	89%	100.0%	9,336,737
10	Premium efficiency ASD compressor	0.38	0	0									
11 12	Premium efficiency ASD compressor	0.63 9.59	0	0	151,036,384	4	8.7%	10%	100.0%	100.0%	98%	100.0%	1,285,445
13	Replace compressed air use with mechanical or electrical Retrofit internal parts of existing centrifugal compressors	1.88	1	1	151,036,384	1	8.7%	10% 50%	100.0%	100.0%	70%	100.0%	4,602,617
14	Sequencing Control	1.68	1	1	151,036,384	1	8.7%	60%	100.0%	100.0%	69%	100.0%	5,404,787
15	Synchronous Belts for Air Compressors	3.58	1	1	151,036,384	1	8.7%	40%	100.0%	100.0%	94%	100.0%	4,944,526
16	Synchronous Belts for Air or Gas Compressors	5.90	1	1	151,036,384	1	8.7%	40%	100.0%	100.0%	94%	100.0%	4,944,526
17	Use cooler air from outside for make up air	32.81	1	1	151,036,384	1	8.7%	60%	100.0%	100.0%	56%	100.0%	4,398,787
18	Volume pocket adjustments	573,728.24	1	1	151,036,384	1	8.7%	30%	100.0%	100.0%	53%	100.0%	2,081,040
19 20	High/Premium Efficiency Motors (Fans) Impeller Trimming or Inlet Guide Vanes	0.35 2.39	0	0 1	151,036,384		7.5%	70%	100.0%	100.0%	99%	100.0%	7,903,746
21	Premium efficiency control, with ASD (Fans)	0.29	0	0	151,036,384	'	7.5%	70%	100.0%	100.0%	99%	100.0%	7,903,740
22	Preventative Fan Maintenance	0.64	0	0									
23	Synchronous Belts (Fans)	1.65	1	1	151,036,384	1	7.5%	40%	100.0%	100.0%	100%	100.0%	4,550,556
24	Efficient Lighting Design	2.35	1	1	151,036,384	1	6.3%	100%	100.0%	100.0%	96%	100.0%	9,149,874
25	High efficiency ballasts for lighting	8.77	1	1	151,036,384	1	6.3%	100%	100.0%	100.0%	86%	100.0%	8,151,706
26	High Efficiency Light fixtures	2.05	1	1	151,036,384	1	6.3%	100%	100.0%	100.0%	74%	100.0%	7,034,709
27	Lighting controls: occupancy sensors Lighting controls: on/off timer settings	0.16 2.00	0	0	151,036,384	1	6.3%	80%	100.0%	100.0%	100%	100.0%	7,605,090
28 29	Ventilation Optimization	0.75	0	0	151,036,384	'	0.3%	80%	100.0%	100.0%	100%	100.0%	7,605,090
30	Air Curtains	0.09	0	0									
31	Air Source Heat Pump for Backup Generators	0.85	0	0									
32	Automated Temperature Control	1.73	1	1	151,036,384	1	9.6%	80%	100.0%	100.0%	46%	100.0%	5,328,969
33	Demand-Controlled Ventilation	0.38	0	0									
34	Destratification Fans	1.29 15.79	1	1	151,036,384	1	9.6% 9.6%	40%	100.0%	100.0%	94%	100.0%	5,444,816
35	Free cooling Ground Source Heat Pump		0	0	151,036,384	1	9.6%	10%	100.0%	100.0%	80%	100.0%	1,154,851
36 37	Heat Recovery from Processes to Heat Ventilation Make-up Air	0.38 0.01	0	0									
38	High efficiency non-packaged HVAC equipment	0.06	0	0									
39	High-efficiency rooftop AC with an EER of 13.5	1.35	1	1	151,036,384	1	9.6%	80%	100.0%	100.0%	70%	100.0%	8,109,301
40	Optimized duct design to improve efficiency	242,866.16	1	1	151,036,384	1	9.6%	80%	100.0%	100.0%	100%	100.0%	11,584,716
41	Premium efficiency ventilation control with VSD	2.47	1	1	151,036,384	1	9.6%	80%	100.0%	100.0%	89%	100.0%	10,281,435
42 43	Preventative Packaged HVAC Maintenance	66,810.49	0	0	151,036,384	1	9.6%	100%	100.0%	100.0%	36%	100.0%	5,249,324
43	Radiant Heaters Reduced Temperature Settings	93,534.67	1	1	151,036,384	1	9.6%	80%	100.0%	100.0%	42%	100.0%	4,894,542
45	Seasonal Temperature Settings Adjustments	93,534.67	1	1	151,036,384	1	9.6%	100%	100.0%	100.0%	42%	100.0%	6,118,178
46	Ventilation Heat Recovery	0.09	0	0									
47	Warehouse Loading Dock Seals	0.24	0	0									
48	Integrated control system	294,423.20	1	1	151,036,384	1	51.6%	83%	100.0%	100.0%	96%	100.0%	61,822,097
49 50	Sub-Metering and Interval Metering Correctly sized motors	242,866.20 0.61	0	0	151,036,384	1	51.6%	100%	100.0%	100.0%	87%	100.0%	67,464,977
50	Correctly sized motors High/Premium Efficiency Motors	0.61	0	0		1						1	
52	Optimized motor control	24.16	1	1	151,036,384	1	21.7%	70%	100.0%	100.0%	96%	100.0%	22,117,117
53	Premium Efficiency Control with ASDs (Other motors)	3.09	1	1	151,036,384	1	21.7%	70%	100.0%	100.0%	90%	100.0%	20,652,217
54	Preventative Motor Maintenance	66,810.50	1	1	151,036,384	1	21.7%	100%	100.0%	100.0%	46%	100.0%	15,100,369
55	Synchronous Belts	3.58	1	1	151,036,384	1	21.7%	40%	100.0%	100.0%	99%	100.0%	13,032,275
56	High efficiency battery charger (for forklifts)	2.65	1	1	151,036,384	1	2.3%	100%	100.0%	100.0%	89%	100.0%	3,123,050
57 58	HE Dry-Type Transformers Doors, Covers and Curtains	68,870.14 2.34	1	1	151,036,384 151,036,384	1	2.1% 7.4%	100% 40%	100.0% 100.0%	100.0% 100.0%	100% 61%	100.0%	3,203,802 2,716,824
59	Floating head pressure controls	13.46	1	1	151,036,384	1	7.4%	10%	100.0%	100.0%	75%	100.0%	837.873
60	Free-cooling	3.89	1	1	151,036,384	1	7.4%	35%	100.0%	100.0%	80%	100.0%	3,107,924
61	High Efficiency Chiller	0.76	0	0	,,,,,,								., . ,
62	Improve insulation of refrigeration system	0.50	0	0									
63	Optimized chilled water temperature and/or optimized condenser temperature	27,392.35	1	1	151,036,384	1	7.4%	60%	100.0%	100.0%	84%	100.0%	5,578,397
64	Optimized condenser pressure	80,172.60	1	1	151,036,384	1	7.4%	60%	100.0%	100.0%	84%	100.0%	5,578,397
65	Optimized Distribution System	1.15	1	1	151,036,384	1 1	7.4%	90%	100.0%	100.0%	94%	100.0%	9,419,808

	MEASURE DESCRIPTION	MEA	ASURE SELECT	TON					APPLICABILITY	Y			
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Measure Inclusion (if Passed Measure	Total Sub- Sector Units	Measure Units per Sub- Sector Unit	- Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
66	Premium efficiency refrigeration control system	0.22	0	0									
67 68	Preventative refrigeration/cooling system maintenance Smart Defrost Controls	66,810.52 37.72	1	1	151,036,384 151,036,384	1	7.4% 7.4%	100% 15%	100.0% 100.0%	100.0% 100.0%	42% 87%	100.0% 100.0%	4,620,828 1,457,231
69	VSD on chiller compressor	2.90	1	1	151,036,384	1	7.4%	80%	100.0%	100.0%	84%	100.0%	7,437,862
70	Advanced water heater controls	5.96	1	1	151,036,384	1	11.3%	90%	100.0%	100.0%	77%	100.0%	11,790,713
71	Air Curtains (Dryer)	27.54	1	1	151,036,384	1	11.3%	9%	100.0%	100.0%	79%	100.0%	1,213,637
72	Air Curtains (Oven)	2.75	1	1	151,036,384	1	11.3%	9%	100.0%	100.0%	79%	100.0%	1,213,637
73 74	Insulation (Dryer) Insulation (Furnace)	14.59 14.59	1	1	151,036,384 151,036,384	1	11.3% 11.3%	90% 90%	100.0% 100.0%	100.0% 100.0%	42% 42%	100.0% 100.0%	6,490,653 6,490,653
75	Insulation (Kiln)	72.95	1	1	151,036,384	1	11.3%	90%	100.0%	100.0%	42%	100.0%	6,490,653
76	Insulation (Oven)	1.46	1	1	151,036,384	1	11.3%	90%	100.0%	100.0%	42%	100.0%	6,490,653
77	Preventative Dryer Maintenance	66,810.53	1	1	151,036,384	1	11.3%	100%	100.0%	100.0%	36%	100.0%	6,187,671
78	Preventative Furnace Maintenance	66,810.53	1	1	151,036,384	1	11.3%	100%	100.0%	100.0%	36%	100.0%	6,187,671
79 80	Preventative Kiln Maintenance Preventative Oven Maintenance	66,810.53 66.810.53	1	1	151,036,384 151,036,384	1	11.3% 11.3%	100% 100%	100.0% 100.0%	100.0% 100.0%	36% 36%	100.0% 100.0%	6,187,671 6,187,671
81	Process Heat Recovery to Preheat Makeup Water	1.42	1	1	151,036,384	1	11.3%	70%	100.0%	100.0%	69%	100.0%	8,274,409
82	High/Premium Efficiency Motors (Pumps)	0.85	0	0	, 000, 004	'		7 0 70	100.076	. 55.070	0370	100.078	5,217,403
83	Impeller Trimming (Pump)	5.87	1	1	151,036,384	1	13.7%	15%	100.0%	100.0%	99%	100.0%	3,048,342
84	Optimization of pumping system	2.24	1	1	151,036,384	1	13.7%	80%	100.0%	100.0%	99%	100.0%	16,381,614
85	Premium Efficiency Control with ASDs (Pumps)	3.09	1	1	151,036,384	1	13.7%	70%	100.0%	100.0%	86%	100.0%	12,384,212
86 87	Preventative Pump Maintenance Compressor Control	66,810.54 8.37	1	1	151,036,384 47,651,097	1	13.7% 4.3%	100% 25%	100.0% 100.0%	100.0% 100.0%	46% 72%	100.0% 100.0%	9,490,608 366,543
88	Improve Compressor Components	1.01	1	1	47,651,097	1	4.3%	15%	100.0%	100.0%	92%	100.0%	281,017
89	Match Compressor Size to Load	0.78	0	0	,								
90	Operation and Maintenance	19.93	1	1	47,651,097	1	4.3%	75%	100.0%	100.0%	37%	100.0%	565,088
91	Reduce Overall System Requirements	34.42	1	1	47,651,097	1	4.3%	30%	100.0%	100.0%	85%	100.0%	519,270
92 93	Improve Fan Components Operation and Maintenance	0.81 26,724.28	0	0 1	47,651,097	1	4.3%	50%	100.0%	100.0%	37%	100.0%	376,725
93	Reduce or Control Fan Speed	48.27	1	1	47,651,097	1	4.3%	10%	100.0%	100.0%	90%	100.0%	183,272
95	Reduce Overall System Requirements	4.39	1	1	47,651,097	1	4.3%	15%	100.0%	100.0%	75%	100.0%	229,090
96	Efficient Lighting Design	3.53	1	1	47,651,097	1	9.7%	100%	100.0%	100.0%	93%	100.0%	4,283,471
97	High efficiency ballasts for lighting	13.15	1	1	47,651,097	1	9.7%	100%	100.0%	100.0%	85%	100.0%	3,915,000
98	High Efficiency Light fixtures	3.07	1	1	47,651,097	1	9.7%	100%	100.0%	100.0%	85%	100.0%	3,915,000
99 100	Lighting controls: occupancy sensors Lighting controls: on/off timer settings	0.25 3.00	0	1	47.651.097	1	9.7%	80%	100.0%	100.0%	100%	100.0%	3.684.706
101	Air Source Heat Pump for Backup Generators	1.27	1	1	47,651,097	1	26.5%	80%	100.0%	100.0%	95%	100.0%	9,611,257
102	Automated Temperature Control	2.60	1	1	47,651,097	1	26.5%	80%	100.0%	100.0%	80%	100.0%	8,093,690
103	Destratification Fans	1.94	1	1	47,651,097	1	26.5%	20%	100.0%	100.0%	95%	100.0%	2,402,814
104	Ground Source Heat Pump	0.57	0	0									
105 106	Heat Recovery from Processes to Heat Ventilation Make-up Air High efficiency non-packaged HVAC equipment	0.02	0	0									
107	High-efficiency rooftop AC with an EER of 13.5	2.02	1	1	47.651.097	1	26.5%	80%	100.0%	100.0%	60%	100.0%	6.070.268
108	Optimized duct design to improve efficiency	0.28	0	0	,	-		5575					5,010,000
109	Preventative Packaged HVAC Maintenance	66,810.56	1	1	47,651,097	1	26.5%	100%	100.0%	100.0%	15%	100.0%	1,896,959
110	Radiant Heaters	0.03	0	0									
111 112	Reduced Temperature Settings Seasonal Temperature Settings Adjustments	93,534.74 93,534.74	1	1	47,651,097 47,651,097	1	26.5% 26.5%	80% 100%	100.0% 100.0%	100.0% 100.0%	80% 80%	100.0% 100.0%	8,093,690 10,117,113
113	Ventilation Heat Recovery	0.13	0	0	47,001,097	<u> </u>	20.0%	100%	100.0%	100.076	00%	100.0%	10,117,113
114	Warehouse Loading Dock Seals	0.36	0	0									
115	Match Motor Size to Load	0.55	0	0									
116	Motor Efficiency Upgrade	0.58	0	0									
117 118	Operations and maintenance Variable Speed Drives	6.07 23.18	1	1	47,651,097 47,651,097	1	13.5% 13.5%	5% 35%	100.0% 100.0%	100.0% 100.0%	37% 9%	100.0% 100.0%	119,292 203,119
119	High efficiency battery charger (for forklifts)	3.98	1	1	47,651,097	1		100%	100.0%	100.0%	85%	100.0%	391,500
120	HE Dry-Type Transformers	68,870.50	1	1	47,651,097	1	5.8%	100%	100.0%	100.0%	100%	100.0%	2,763,529
121	Doors, Covers and Curtains	3.51	1	1	47,651,097	1	10.6%	10%	100.0%	100.0%	79%	100.0%	400,251
122	Floating head pressure controls	20.18	1	1	47,651,097	1	10.6%	10%	100.0%	100.0%	97%	100.0%	491,448
123	Free-cooling	5.84	1	1	47,651,097	1	10.6% 10.6%	35%	100.0%	100.0%	100% 96%	100.0%	1,773,265
124 125	High Efficiency Chiller Improve insulation of refrigeration system	1.15 0.75	0	0	47,651,097	1	10.6%	10%	100.0%	100.0%	96%	100.0%	486,381
126	Optimized chilled water temperature and/or optimized condenser temperature	27,392.42	1	1	47,651,097	1	10.6%	35%	100.0%	100.0%	87%	100.0%	1,542,740
127	Optimized condenser pressure	80,172.67	1	1	47,651,097	1	10.6%	35%	100.0%	100.0%	87%	100.0%	1,542,740
128	Premium efficiency refrigeration control system	0.33	0	0									
129	Preventative refrigeration/cooling system maintenance	66,810.59	1	1	47,651,097	1	10.6%	100%	100.0%	100.0%	15%	100.0%	759,971
130	Smart Defrost Controls	56.54	1	1	47,651,097	1	10.6%	10%	100.0%	100.0%	90%	100.0%	455,982

	MEASURE DESCRIPTION	MEA	ASURE SELECT	ΓΙΟΝ					APPLICABILIT	Y			-
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Measure Inclusion (if Passed Measure	Total Sub- Sector Units	Measure Units per Sub Sector Unit	- Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
	Advanced water heater controls	8.93	1	1	47,651,097	1	15.5%	90%	100.0%	100.0%	60%	100.0%	3,979,482
	Air Curtains (Dryer)	41.28 4.12	1	1	47,651,097 47,651,097	1	15.5% 15.5%	9% 9%	100.0% 100.0%	100.0% 100.0%	80% 80%	100.0% 100.0%	530,598 530,598
133	Air Curtains (Oven) Insulation (Dryer)	21.87	1	1	47,651,097	1	15.5%	95%	100.0%	100.0%	40%	100.0%	2,800,376
	Insulation (Oven)	2.18	1	1	47,651,097	1	15.5%	90%	100.0%	100.0%	40%	100.0%	2,652,98
	Optimized Distribution System	1.72	1	1	47,651,097	1	15.5%	93%	100.0%	100.0%	76%	100.0%	5,208,70
137	Preventative Dryer Maintenance	66,810.60	1	1	47,651,097	1	15.5%	100%	100.0%	100.0%	15%	100.0%	1,105,412
	Preventative Oven Maintenance	66,810.60	1	1	47,651,097	1	15.5%	100%	100.0%	100.0%	15%	100.0%	1,105,412
	Process Heat Recovery to Preheat Makeup Water	2.13	1	1	47,651,097	1	15.5%	90%	100.0%	100.0%	75%	100.0%	4,974,35
	Improve Pump Components	1.24	1	1	47,651,097	1	5.7% 5.7%	10%	100.0%	100.0%	4% 20%	100.0%	10,859
	Match Pump Size to Load Operation and Maintenance	4.64 26,724.34	1	1	47,651,097 47,651,097	1	5.7%	20% 5%	100.0% 100.0%	100.0% 100.0%	37%	100.0% 100.0%	108,588 50,222
	Reduce or Control Pump Speed	10.43	1	1	47,651,097	1	5.7%	35%	100.0%	100.0%	94%	100.0%	893,139
	Reduce Overall System Requirements	4.78	1	1	47,651,097	1	5.7%	50%	100.0%	100.0%	82%	100.0%	1,113,03
145	Compressor Control	8.37	1	1	37,946,740	1	5.0%	25%	100.0%	100.0%	72%	100.0%	341,682
	Improve Compressor Components	1.01	1	1	37,946,740	1	5.0%	15%	100.0%	100.0%	92%	100.0%	261,956
	Match Compressor Size to Load	0.78	0	0									
	Operation and Maintenance	19.93	1	1	37,946,740	1	5.0%	75%	100.0%	100.0%	37%	100.0%	526,760
	Reduce Overall System Requirements Improve Fan Components	34.42 0.81	0	0	37,946,740	1	5.0%	30%	100.0%	100.0%	85%	100.0%	484,049
	Operation and Maintenance	26,724.35	1	1	37,946,740	1	4.4%	50%	100.0%	100.0%	37%	100.0%	312,253
	Reduce or Control Fan Speed	48.27	1	1	37,946,740	1	4.4%	10%	100.0%	100.0%	90%	100.0%	151,90
	Reduce Overall System Requirements	4.39	1	1	37,946,740	1	4.4%	15%	100.0%	100.0%	75%	100.0%	189,883
	Efficient Lighting Design	3.53	1	1	37,946,740	1	5.0%	100%	100.0%	100.0%	93%	100.0%	1,746,909
	High efficiency ballasts for lighting	13.15	1	1	37,946,740	1	5.0%	100%	100.0%	100.0%	85%	100.0%	1,596,637
	High Efficiency Light fixtures	3.07	1	1	37,946,740	1	5.0%	100%	100.0%	100.0%	85%	100.0%	1,596,637
157	Lighting controls: occupancy sensors	0.25	0	0	27.040.740		F 00/	000/	400.00/	100.00/	4000/	400.00/	4 500 74
158 159	Lighting controls: on/off timer settings Air Source Heat Pump for Backup Generators	3.00 1.27	1	1	37,946,740 37,946,740	1	5.0% 7.9%	80% 80%	100.0% 100.0%	100.0% 100.0%	100% 95%	100.0% 100.0%	1,502,718 2,286,502
	Automated Temperature Control	2.60	1	1	37,946,740	1	7.9%	80%	100.0%	100.0%	80%	100.0%	1,925,475
	Destratification Fans	1.94	1	1	37,946,740	1	7.9%	20%	100.0%	100.0%	95%	100.0%	571,625
	Ground Source Heat Pump	0.57	0	0	,,,,,,								
	Heat Recovery from Processes to Heat Ventilation Make-up Air	0.02	0	0									
	High efficiency non-packaged HVAC equipment	0.08	0	0									L
165	High-efficiency rooftop AC with an EER of 13.5	2.02	1	1	37,946,740	1	7.9%	80%	100.0%	100.0%	60%	100.0%	1,444,100
	Optimized duct design to improve efficiency Preventative Packaged HVAC Maintenance	0.28 66,810.63	0	0	37,946,740	1	7.9%	100%	100.0%	100.0%	15%	100.0%	451,283
168	Radiant Heaters	0.03	0	0	37,940,740	'	7.9%	100%	100.0%	100.0%	1376	100.0%	451,26
	Reduced Temperature Settings	93,534.81	1	1	37,946,740	1	7.9%	80%	100.0%	100.0%	80%	100.0%	1,925,475
	Seasonal Temperature Settings Adjustments	93,534.81	1	1	37,946,740	1	7.9%	100%	100.0%	100.0%	80%	100.0%	2,406,84
171	Ventilation Heat Recovery	0.13	0	0									
	Warehouse Loading Dock Seals	0.36	0	0									
	Match Motor Size to Load	0.55	0	0									
	Motor Efficiency Upgrade	0.58 6.07	0	0	37,946,740		15.6%	5%	100.0%	100.0%	37%	100.0%	109,24
	Operations and maintenance Variable Speed Drives	23.18	1	1	37,946,740	1	15.6%	35%	100.0%	100.0%	9%	100.0%	186,01
	High efficiency battery charger (for forklifts)	3.98	1	1	37,946,740	1	0.0%	100%	100.0%	100.0%	85%	100.0%	100,01
	HE Dry-Type Transformers	68,870.82	1	1	37,946,740	1	2.0%	100%	100.0%	100.0%	100%	100.0%	751,35
179	Doors, Covers and Curtains	3.51	1	1	37,946,740	1	2.0%	10%	100.0%	100.0%	79%	100.0%	59,35
	Floating head pressure controls	20.18	1	1	37,946,740	1	2.0%	10%	100.0%	100.0%	97%	100.0%	72,88
	Free-cooling	5.84	1	1	37,946,740	1	2.0%	35%	100.0%	100.0%	100%	100.0%	262,97
	High Efficiency Chiller	1.15 0.75	1	1	37,946,740	1	2.0%	10%	100.0%	100.0%	96%	100.0%	72,13
	Improve insulation of refrigeration system Optimized chilled water temperature and/or optimized condenser temperature	27,392.49	0	0	37,946,740	- 4	2.0%	35%	100.0%	100.0%	87%	100.0%	228,78
	Optimized condenser pressure	80,172.74	1	1	37,946,740	1	2.0%	35%	100.0%	100.0%	87%	100.0%	228,78
	Premium efficiency refrigeration control system	0.33	0	0	57,540,740	<u> </u>	2.570	3376	100.070	. 55.070	37 /6	100.076	220,70
	Preventative refrigeration/cooling system maintenance	66,810.65	1	1	37,946,740	1	2.0%	100%	100.0%	100.0%	15%	100.0%	112,70
	Smart Defrost Controls	56.54	1	1	37,946,740	1	2.0%	10%	100.0%	100.0%	90%	100.0%	67,62
	Advanced water heater controls	8.93	1	1	37,946,740	1	32.7%	90%	100.0%	100.0%	60%	100.0%	6,694,60
	Air Curtains (Dryer)	41.28	1	1	37,946,740	1	32.7%	9%	100.0%	100.0%	80%	100.0%	892,61
	Air Curtains (Oven)	4.12 21.87	1 1	1	37,946,740	1	32.7% 32.7%	9% 95%	100.0%	100.0% 100.0%	80% 40%	100.0% 100.0%	892,61 4,711,02
192 193	Insulation (Dryer) Insulation (Oven)	21.87	1	1	37,946,740 37,946,740	1	32.7%	95%	100.0% 100.0%	100.0%	40%	100.0%	4,711,02
	Optimized Distribution System	1.72	1	1	37,946,740	1	32.7%	93%	100.0%	100.0%	76%	100.0%	8,762,49
	Preventative Dryer Maintenance	66,810.66	1	1	37,946,740	1	32.7%	100%	100.0%	100.0%	15%	100.0%	1,859,61

- Page 123 of 133

	MEASURE DESCRIPTION	MEA	ASURE SELECT	ION					APPLICABILITY	1			
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Measure Inclusion (if Passed Measure	Total Sub- Sector Units	Measure Units per Sub- Sector Unit	Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
196	Preventative Oven Maintenance	66,810.66	1	1	37,946,740	1	32.7%	100%	100.0%	100.0%	15%	100.0%	1,859,613
197	Process Heat Recovery to Preheat Makeup Water	2.13	1	1	37,946,740	1	32.7%	90%	100.0%	100.0%	75%	100.0%	8,368,259
	Improve Pump Components	1.24	1	1	37,946,740	1	6.7%	10%	100.0%	100.0%	4%	100.0%	10,122
199 200	Match Pump Size to Load Operation and Maintenance	4.64 26.724.40	1	1	37,946,740 37,946,740	1	6.7% 6.7%	20% 5%	100.0% 100.0%	100.0%	20% 37%	100.0%	101,223 46.816
200	Reduce or Control Pump Speed	10.43	1	1	37,946,740	1	6.7%	35%	100.0%	100.0%	94%	100.0%	832,560
202	Reduce Overall System Requirements	4.78	1	1	37,946,740	1	6.7%	50%	100.0%	100.0%	82%	100.0%	1,037,536
203	Compressor Control	8.37	1	1	178,853,482	1	4.9%	25%	100.0%	100.0%	72%	100.0%	1,583,296
204	Improve Compressor Components	1.01	1	1	178,853,482	1	4.9%	15%	100.0%	100.0%	92%	100.0%	1,213,861
205	Match Compressor Size to Load	0.78	0	0									
206	Operation and Maintenance	19.93 34.42	1	1	178,853,482 178,853,482	1	4.9%	75% 30%	100.0% 100.0%	100.0% 100.0%	37% 85%	100.0%	2,440,915 2,243,003
207 208	Reduce Overall System Requirements Improve Fan Components	0.81	0	0	178,853,482	1	4.9%	30%	100.0%	100.0%	85%	100.0%	2,243,003
209	Operation and Maintenance	26,724.41	1	1	178,853,482	1	4.9%	50%	100.0%	100.0%	37%	100.0%	1,627,277
210	Reduce or Control Fan Speed	48.27	1	1	178,853,482	1	4.9%	10%	100.0%	100.0%	90%	100.0%	791,648
211	Reduce Overall System Requirements	4.39	1	1	178,853,482	1	4.9%	15%	100.0%	100.0%	75%	100.0%	989,560
212	Efficient Lighting Design	3.53	1	1	178,853,482	1	7.9%	100%	100.0%	100.0%	93%	100.0%	13,136,400
213	High efficiency ballasts for lighting	13.15	1	1	178,853,482	1	7.9%	100%	100.0%	100.0%	85%	100.0%	12,006,387
214 215	High Efficiency Light fixtures Lighting controls: occupancy sensors	3.07 0.25	1 0	0	178,853,482	1	7.9%	100%	100.0%	100.0%	85%	100.0%	12,006,387
216	Lighting controls: occupancy sensors Lighting controls: on/off timer settings	3.00	1	1	178,853,482	1	7.9%	80%	100.0%	100.0%	100%	100.0%	11,300,129
217	Air Source Heat Pump for Backup Generators	1.27	1	1	178,853,482	1	10.2%	80%	100.0%	100.0%	95%	100.0%	13,816,628
218	Automated Temperature Control	2.60	1	1	178,853,482	1	10.2%	80%	100.0%	100.0%	80%	100.0%	11,635,055
219	Destratification Fans	1.94	1	1	178,853,482	1	10.2%	20%	100.0%	100.0%	95%	100.0%	3,454,157
220	Ground Source Heat Pump	0.57	0	0									
221	Heat Recovery from Processes to Heat Ventilation Make-up Air	0.02	0	0									
222	High efficiency non-packaged HVAC equipment	0.08	0	0 1	470.050.400	1	10.2%	80%	100.0%	100.0%	C00/	100.0%	0.700.004
223 224	High-efficiency rooftop AC with an EER of 13.5 Optimized duct design to improve efficiency	2.02	0	0	178,853,482	1	10.2%	80%	100.0%	100.0%	60%	100.0%	8,726,291
225	Preventative Packaged HVAC Maintenance	66,810.69	1	1	178,853,482	1	10.2%	100%	100.0%	100.0%	15%	100.0%	2,726,966
226	Radiant Heaters	0.03	0	0	,,								
227	Reduced Temperature Settings	93,534.87	1	1	178,853,482	1	10.2%	80%	100.0%	100.0%	80%	100.0%	11,635,055
228	Seasonal Temperature Settings Adjustments	93,534.87	1	1	178,853,482	1	10.2%	100%	100.0%	100.0%	80%	100.0%	14,543,819
229	Ventilation Heat Recovery	0.13	0	0									
230	Warehouse Loading Dock Seals	0.36	0	0									
231 232	Match Motor Size to Load Motor Efficiency Upgrade	0.55 0.58	0	0									
233	Operations and maintenance	6.07	1	1	178,853,482	1	25.2%	5%	100.0%	100.0%	37%	100.0%	832,571
234	Variable Speed Drives	23.18	1	1	178,853,482	1	25.2%	35%	100.0%	100.0%	9%	100.0%	1,417,620
235	High efficiency battery charger (for forklifts)	3.98	1	1	178,853,482	1	1.0%	100%	100.0%	100.0%	85%	100.0%	1,500,798
236	HE Dry-Type Transformers	68,871.15	1	1	178,853,482	1	2.0%	100%	100.0%	100.0%	100%	100.0%	3,531,290
237	Doors, Covers and Curtains	3.51	1	1	178,853,482	1	28.6%	10%	100.0%	100.0%	79% 97%	100.0%	4,045,093
238 239	Floating head pressure controls Free-cooling	20.18 5.84	1	1	178,853,482 178,853,482	1	28.6% 28.6%	10% 35%	100.0% 100.0%	100.0% 100.0%	100%	100.0%	4,966,760 17,921,298
239	High Efficiency Chiller	1.15	1	1	178,853,482	1	28.6%	10%	100.0%	100.0%	96%	100.0%	4,915,556
241	Improve insulation of refrigeration system	0.75	0	0	,, 102	·		.070			3070		.,5.5,000
242	Optimized chilled water temperature and/or optimized condenser temperature	27,392.55	1	1	178,853,482	1	28.6%	35%	100.0%	100.0%	87%	100.0%	15,591,529
243	Optimized condenser pressure	80,172.80	1	1	178,853,482	1	28.6%	35%	100.0%	100.0%	87%	100.0%	15,591,529
244	Premium efficiency refrigeration control system	0.33	0	0	470.000		00.551			400 001			
245 246	Preventative refrigeration/cooling system maintenance Smart Defrost Controls	66,810.71 56.54	1	1	178,853,482 178,853,482	1	28.6% 28.6%	100% 10%	100.0% 100.0%	100.0%	15% 90%	100.0%	7,680,556 4,608,334
246	Advanced water heater controls	8.93	1	1	178,853,482	1	4.9%	90%	100.0%	100.0%	60%	100.0%	4,608,334
248	Advanced water neater controls Air Curtains (Dryer)	41.28	1	1	178,853,482	1	4.9%	90%	100.0%	100.0%	80%	100.0%	635,632
249	Air Curtains (Oven)	4.12	1	1	178,853,482	1	4.9%	9%	100.0%	100.0%	80%	100.0%	635,632
250	Insulation (Dryer)	21.87	1	1	178,853,482	1	4.9%	95%	100.0%	100.0%	40%	100.0%	3,354,726
251	Insulation (Oven)	2.18	1	1	178,853,482	1	4.9%	90%	100.0%	100.0%	40%	100.0%	3,178,161
252	Optimized Distribution System	1.72	11	1	178,853,482	1	4.9%	93%	100.0%	100.0%	76%	100.0%	6,239,790
253 254	Preventative Dryer Maintenance Preventative Oven Maintenance	66,810.72 66,810.72	1	1	178,853,482 178,853,482	1	4.9% 4.9%	100% 100%	100.0% 100.0%	100.0%	15% 15%	100.0%	1,324,234 1,324,234
254	Preventative Oven Maintenance Process Heat Recovery to Preheat Makeup Water	2.13	1	1	178,853,482	1	4.9%	90%	100.0%	100.0%	75%	100.0%	1,324,234 5,959,052
256	Improve Pump Components	1.24	1	1	178,853,482	1	10.7%	10%	100.0%	100.0%	4%	100.0%	76,574
257	Match Pump Size to Load	4.64	1	1	178,853,482	1	10.7%	20%	100.0%	100.0%	20%	100.0%	765,739
258	Operation and Maintenance	26,724.46	1	1	178,853,482	1	10.7%	5%	100.0%	100.0%	37%	100.0%	354,154
259	Reduce or Control Pump Speed	10.43	1	1	178,853,482	1	10.7%	35%	100.0%	100.0%	94%	100.0%	6,298,204
260	Reduce Overall System Requirements	4.78	1	1	178,853,482	1	10.7%	50%	100.0%	100.0%	82%	100.0%	7,848,826

Name		MEASURE DESCRIPTION	MEA	ASURE SELECT	TION					APPLICABILITY	<i>,</i>			1
			Measure TRC calculated for	Passed Measure Screening?	Measure Inclusion (if Passed	Sector Units	Units per Sub-		Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Adopted Rate	Replacement Eligibility	Total Applicable Measure Units
April Compressed Sept Load				1	1		1							39,740
246 December of March Regulations March 1 1 1 1.4000X 1 1196, 1297, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101076, 101077						1,849,000	1	11.9%	15%	100.0%	100.0%	92%	100.0%	30,468
						4 0 4 0 0 0 0		44.00/	750/	100.00/	100.00/	070/	100.00/	04.000
Property of Company of Authority of Company of Authority of Authorit							1							61,266 56,299
227 Company and Montenesces						1,043,000		11.570	3070	100.070	100.070	0070	100.070	30,233
Reduce Overall System Regressments			26,724.47			1,849,000	1	7.0%	50%	100.0%	100.0%	37%	100.0%	23,826
Property Property	268	Reduce or Control Fan Speed	48.27	1	1	1,849,000	1	7.0%	10%	100.0%	100.0%		100.0%	11,591
Page differency behalved for lighting 1.1 1.546,000 1.2,4% 100% 100,0%				1			1							14,489
Page Registration Lange Lange				1			1							40,546
273 Lighting commiss accompance seasons							1							37,058 37,058
274 Agring occords cord lines enterling 3.000 1 1 1.048.000 1 2.45, 895 100.05, 100.05, 100.05 3.277 2.47						1,043,000		2.470	10078	100.078	100.078	0378	100.078	37,030
270 An Source Heat Pump for Backup Generators 137 1 1 1 1 1 1 1 1 1						1,849,000	1	2.4%	80%	100.0%	100.0%	100%	100.0%	34,878
277 Automated Temperatures Control 268 1 1 1.846,000 1.34% 20% 100.0% 100.0% 99% 100.0%	275	Air Curtains	0.14	0	0									
278 Destinations Page 1944 1							1							53,070
279 Free cooling						, ,	1							44,691
280 Ground Source Head Pump					· ·		1							13,268 6,983
281 Heaf Recovery from Processes to Heaf Vertillation Make-up Air					 	1,849,000	1	3.8%	10%	100.0%	100.0%	100%	100.0%	6,983
282 Ngs efficiency morpolacy Affect Engineers 0.06 0 0 1 1,846,000 1 3.9% 80% 100.0% 100.0% 60% 100.0% 3.2% 238 Ngs efficiency morpolacy of the Section of Section 10.0% 10.0% 100.														
200 Poly-efficiency proteins of with an EER of 13.5 200 1 1 1,840,000 1 3,9% 80% 10,00% 60% 10,00% 3 286				0	0									
286 Recentaive Petaloged HVAC Materianace 86.816.76 1 1 1,848.000 1 3.8% 100% 100.0% 100.0% 100.0% 100.0% 128 100.0%	283		2.02	1	1	1,849,000	1	3.8%	80%	100.0%	100.0%	60%	100.0%	33,518
286 Radam Heuters														
287 Reduced Temperature Settings 93,544.04 1 1,849.000 1,38% 60% 100.0% 60% 600.0% 628						1,849,000	1	3.8%	100%	100.0%	100.0%	15%	100.0%	10,474
288 Seasonal Temperature Settings Allystaments						4 040 000	1	2 00/	000/	400.00/	400.00/	900/	400.00/	44.691
289 Verifation Hair Recovery							1							55.863
291 March Moire Size to Load						1,010,000		0.070	10070	100.070	100.070	0070	100.070	00,000
292 Motor Efficiency Ugrande			0.36											
293 Operations and maintenance 6,07		Match Motor Size to Load												
234 Variable Speed Drives 23.18 1				0	0									
295 Inprove Pump Components				1	1		1							4,357
286 Match Pump Size to Load							1							7,418 3,532
287 Operation and Maintenance 28,724.51 1 1,849,000 1 47.8% 55% 100.0% 100.0% 37% 100.0% 298 298 Reduce or Control Pump Speed 104.33 1 1 1,849,000 1 47.8% 55% 100.0% 100.0% 298 299 Reduce Overall System Requirements 4.78 1 1 1,849,000 1 47.8% 55% 100.0% 100.0% 82% 100.0% 38 390 200						7	1							35,325
299 Reduce Overall System Requirements				1	1		1	47.8%				37%		16,338
300 Compressor Control 8.37				1	1		1							290,546
301 Improve Compressor Compnents 1.01							1							362,079
Match Compressor Size to Load							1							1,117,628
303 Operation and Maintenance 19.93 1 1 102.517.578 1 6.1% 75% 100.0% 37% 100.0% 37% 100.0% 1.72						102,517,578	1	6.1%	15%	100.0%	100.0%	92%	100.0%	856,848
Reduce Overall System Requirements					-	102 517 578	1	6.1%	75%	100.0%	100.0%	37%	100.0%	1,723,010
305 Improve Fan Components 0.81 0 0 0				1			1							1,583,306
307 Reduce or Control Fan Speed 48.27 1 1 102,517,578 1 6.1% 100,0% 100.0% 90% 100.0% 55			0.81	0	0									
Reduce Overall System Requirements				1			1							1,148,673
3.99 Efficient Lighting Design 3.53 1 1 102,517,578 1 14.3% 100% 100.0% 100.0% 93% 100.0% 13,15 310 High efficiency ballasts for lighting 13.15 1 1 102,517,578 1 14.3% 100% 100.0% 100.0% 85% 100.0% 12,44 1311 High Efficiency Light fixtures 3.07 1 1 102,517,578 1 14.3% 100% 100.0% 100.0% 85% 100.0% 12,44 1312 Lighting controls: occupancy sensors 0.25 0 0 0 0 0 0 0 0 0							1							558,814
310 High efficiency ballasts for lighting 13.15 1 1 102,517,578 1 14.3% 100% 100.0% 100.0% 85% 100.0% 12,44							1							698,517 13,611,111
311 High Efficiency Light fixtures 3.07 1 1 102,517,578 1 14.3% 100% 100.0% 100.0% 85% 100.0% 12,44 312 Lighting controls: cocupancy sensors 0.25 0 0 0 0 313 Lighting controls: cocupancy sensors 0.25 0 0 0 314 Air Source Heat Pump for Backup Generators 1.27 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 95% 100.0% 17,81 315 Automated Temperature Control 2.60 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 80% 100.0% 15,00 316 Destratification Fans 1 1 1 1 1 1 1 1 1							1							13,611,111
312 Lighting controls: occupancy sensors 0.25 0 0 11,758 1 14.3% 80% 100.0% 100.0% 100.0% 100.0% 100.0% 11,758 1 14.3% 80% 100.0% 100.0% 100.0% 100.0% 100.0% 11,758 1 10.2517,578 1 10.2517							1							12,440,262
314 Air Source Heat Pump for Backup Generators 1.27 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 95% 100.0% 17,81 315 Automated Temperature Control 2.60 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 80% 100.0% 15,00 15,00 316 Destratification Fans 1.94 1 1 1 102,517,578 1 22.9% 20% 100.0% 100.0% 80% 100.0% 4,45 317 Ground Source Heat Pump 0.57 0 0 318 Heat Recovery from Processes to Heat Ventilation Make-up Air 0.02 0 0 319 High efficiency non-packaged HVAC equipment 0.08 0 0 320 High-efficiency rooftop AC with an EER of 13.5 2.02 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 60% 100.0% 11,25 321 Optimized duct design to improve efficiency 0.28 0 0 320 Preventative Packaged HVAC Maintenance 66,810.80 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 15% 100.0% 3,51 323 Radiant Heaters 0.03 0 0 3,51 324 Reduced Temperature Settings 93,534.98 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 80% 100.0% 15,00 15,00 15,00 100.0% 15,00 100.0% 100.			0.25	0	0									
315 Automated Temperature Control 2.60 1 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 80% 100.0% 15,00 316 Destratification Fans 1.94 1 1 102,517,578 1 22.9% 20% 100.0% 100.0% 95% 100.0% 4,45 317 Ground Source Heat Pump 0.57 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0							1							11,708,482
316 Destratification Fans 1.94 1 1 102,517,578 1 22.9% 20% 100.0% 100.0% 95% 100.0% 4,45 317 Ground Source Heat Pump 0.57 0 0 0 0 318 Heat Recovery from Processes to Heat Ventilation Make-up Air 0.02 0 0 0 0 319 High efficiency non-packaged HVAC equipment 0.08 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0					· ·		1							17,815,367
317 Ground Source Heat Pump 0.57 0 0 0				1	· ·		1							15,002,414 4,453,842
318 Heat Recovery from Processes to Heat Ventilation Make-up Air 0.02 0 0 0 319 High efficiency non-packaged HVAC equipment 0.08 0 0 0 10.0% 100.0% 100.0% 100.0% 100.0% 100.0% 100.0% 11.25 10.0% 100				0	· ·	102,517,578	1	22.9%	20%	100.0%	100.0%	95%	100.0%	4,403,642
319 High efficiency non-packaged HVAC equipment 0.08 0 0 0						1	1							
320 High-efficiency rooftop AC with an EER of 13.5 2.02 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 60% 100.0% 11,25		High efficiency non-packaged HVAC equipment				İ								
322 Preventative Packaged HVAC Maintenance 66,810.80 1 1 102,517,578 1 22.9% 100% 100.0% 100.0% 15% 100.0% 3,51 323 Radiant Heaters 0.03 0		High-efficiency rooftop AC with an EER of 13.5	2.02	1	1	102,517,578	1	22.9%	80%	100.0%	100.0%	60%	100.0%	11,251,811
323 Radiant Heaters 0.03 0 0 324 Reduced Temperature Settings 93,534.98 1 1 102,517,578 1 22.9% 80% 100.0% 100.0% 80% 100.0% 15,00	321	Optimized duct design to improve efficiency												
324 Reduced Temperature Settings 93,534.98 1 1 102,517,578 122.9% 80% 100.0% 100.0% 80% 100.0% 15,00						102,517,578	1	22.9%	100%	100.0%	100.0%	15%	100.0%	3,516,191
						102 517 579	1	22 9%	g00/-	100.0%	100.0%	800/	100.0%	15,002,414
325 Seasonal Temperature Settings Adjustments 93,534,98 1 1 102,517,578 1 22,9% 100% 100.0%		Seasonal Temperature Settings Adjustments	93,534.98	1	1	102,517,578	1	22.9%	100%	100.0%	100.0%	80%	100.0%	18,753,018

Measure Name		MEASURE DESCRIPTION	MEA	ASURE SELECT	TION					APPLICABILITY	1			
327	Measure ID		Measure TRC calculated for	Passed Measure Screening?	Measure Inclusion (if Passed		Units per Sub-	Applicability	Technical	Distribution of Measure Permutation by Measure	Distribution of Measure Permutation by Efficiency		Replacement	Total Applicable Measure Units
Mater Mater Steps Clad				0	-									
Section Sect														
30 Sections and mentatements 400 1 1 100515701 1045 10075 10076 375 10076 375 10076 375 10076 375 10076 375 10076 375 10076 375 10076 375 10076 375 10076 375 10076 375 10076 375 10076 375 375 10076 375														
331						400 547 570	1	40.40/	F0/	400.00/	400.00/	270/	400.00/	367.575
328 Telephone							1							625,872
133 200 Concess and Custors 1.5 1 1.02571779 1.29% 1978 1900,				1			1							3,732,079
Figure 1 Feature 1 Feature 1 Feature 1 1 1 1 1 1 1 1 1 1	333		68,871.70	1	1		1			100.0%	100.0%	100%	100.0%	2,927,121
Pre-coording				1			1							231,243
Section Sect				1			1							283,931
Section Proceedings of particles of part				1			1							1,024,492 281,004
390 Openmode offende what temperature and/or opinized concloses presents \$0.0725 1 1 105251778 1 29% 35% 1000% 1007% 67% 1000% 341 1000% 341 1000% 341						102,317,376		2.9%	10%	100.0%	100.0%	90%	100.0%	201,004
360 Cylemical condusted condusted resiscant militarian relistancy origination cortical system 0.31						102.517.578	1	2.9%	35%	100.0%	100.0%	87%	100.0%	891,308
342 Project Securities 1.00 1				1			1							891,308
Sent Debet Common		, , ,												
Advanced water fester controls 833 1 1 1025/17/87 1 11.4% 99% 100.0% 100.0% 607% 100.0				1			1							439,068
346 Ar Currains (Open)				1			1							263,441 6,322,580
340 Ar Curtans (Over)							1							6,322,580 843,011
342 Insulation (Open)							1							843,011
1.72 1 1 10.517.576 1 11.4% 63% 100.7% 100.7% 75% 100.0% 15% 15% 100.0% 15% 15% 100.0% 15%				1			1							4,449,223
Section Preventative Deep Maintenance 66,816,83 1 1 102,617,676 11 1.4% 100% 100,076 100,076 151% 100,076 131 132 132 132 133 1 102,617,676 11 1.4% 100% 100,076 100,076 151% 100,076 132 133 133 102,617,676 13,776 13,				1	1		1			100.0%				4,215,054
351 Preventative Commitmensee				1	1		1							8,275,555
1.552 Process Heaf Recovery to Perheat Makeu Water							1							1,756,272
124							1							1,756,272 7,903,225
354 Match Pump Size to Load 84.4 1 102,517,578 1 8.5% 20% 100,0% 200, % 200, % 100,0% 20% 100,0% 356 356 Reduce or Cortrol Pump Speed 10.43 1 1 102,517,578 1 8.5% 35% 100,0% 100,0% 37% 100,0							1							7,903,225
355 Operation and Maintenance 387,457 1 1 10,217,578 1 8.5% 5% 100,0% 300,0% 37% 100,0% 37% 356 Reduce Overall System Requirements 4.78 1 1 10,217,578 1 8.5% 50% 100,0% 100,0% 82% 100,0% 358 Compressor Control 8.37 1 1 18,524,974 1 11.9% 25% 100,0% 100,0% 92% 100,0% 35% 100,0% 32							1							347,706
S57 Reduce Overall System Requirements				1	1		1							160,814
358 Compressor Cortrol 8.37		Reduce or Control Pump Speed					1							2,859,885
359 Improve Compenents							1							3,563,991
380 Match Compressor Size to Load					· ·		1							398,156
361 Operation and Maintenance						18,524,974	1	11.9%	15%	100.0%	100.0%	92%	100.0%	305,253
322 Reduce Overall System Requirements				-	-	18.524.974	1	11.9%	75%	100.0%	100.0%	37%	100.0%	613,823
364 Operation and Maintenance 28,724.58 1 1 15,24.974 1 7.0% 50% 100.0% 37% 100.0% 37% 100.0% 38% 100.0% 386 Reduce or Control Fan Speed 48.27 1 1 18,524.974 1 7.0% 10% 100.0% 100.0% 95% 100.0% 386 Reduce Overall System Requirements 4.39 1 1 18,524.974 1 7.0% 15% 100.0% 100.0% 95% 100.0% 386 Reduce Overall System Requirements 4.39 1 1 18,524.974 1 7.0% 15% 100.0% 100.0% 95% 100.0% 386 High efficiency ballasts for lighting 31.315 1 18,524.974 1 2.4% 100% 100.0% 95% 100.0% 389 High efficiency ballasts for lighting 31.315 1 18,524.974 1 2.4% 100% 100.0% 95% 100.0% 399 High Efficiency Light fixtures 3.07 1 1 18,524.974 1 2.4% 100% 100.0% 85% 100.0% 370 Lighting controls: occupancy sensors 0.25 0 1 12,524.974 1 2.4% 100% 100.0% 100.0% 85% 100.0% 371 Lighting controls: occupancy sensors 0.14 0 0 1 18,524.974 1 2.4% 80% 100.0				1			1							564,054
365 Reduce Or Control Fan Speed 48.27 1 1 18.524.974 1 7.0% 100.0% 100.0% 90% 100.0% 368 Reduce Overall System Requirements 4.39 1 1 18.524.974 1 7.0% 15% 100.0% 100.0% 75% 100.0% 367 100.0% 368 Reduce Overall System Requirements 4.39 1 1 18.524.974 1 7.0% 15% 100.0% 100.0% 75% 100.0% 369 369 3				0	0									
366 Reduce Overall System Requirements							1							238,709
367 Efficient Lighting Design 3.53 1 1 18,524,974 1 2.4% 100% 100.0% 93% 100.0% 388 High efficiency ballasts for lighting 31.15 1 1 18,524,974 1 2.4% 100% 100.0% 100.0% 85% 100.0% 369 High Efficiency Light fixtures 3.07 1 1 18,524,974 1 2.4% 100% 100.0% 100.0% 85% 100.0% 370 Lighting controls: occupancy sensors 0.25 0 0 0 0 0 0 0 0 0				1			1							116,129 145,161
368 High efficiency ballasts for lighting 13.15 1 1 18,524,974 1 2.4% 100% 100.0% 100.0% 85% 100.0% 399 High efficiency Light fixtures 3.07 1 1 18,524,974 1 2.4% 100% 100.0% 100.0% 85% 100.0% 370 Lighting controls: occupancy sensors 0.25 0 0 0 0 0 0 0 0 0				1			1							406,228
369 High Efficiency Light fixtures 3.07 1 1 18,524,974 1 2.4% 100% 100.0% 100.0% 85% 100.0% 370 Lighting controls: occupancy sensors 0.25 0 0							1							371,284
371 Lighting controls: on/off timer settings 3.00 1 1 18,524,974 1 2.4% 80% 100.0% 100.0% 100.0% 100.0% 372 Air Curtains 0.14 0 0				1	1		1	2.4%						371,284
372 Air Curtains				0										
373 Air Source Heat Pump for Backup Generators 1.27 1 1 18,524,974 1 3.8% 80% 100.0% 100.0% 95% 100.0% 374 Automated Temperature Control 2.60 1 1 18,524,974 1 3.8% 80% 100.0% 100.0% 80% 100.0% 80% 100.0% 375 100.0% 375 100.0% 376 Free cooling 23.66 1 1 18,524,974 1 3.8% 20% 100.0% 100.0% 100.0% 376 Free cooling 23.66 1 1 18,524,974 1 3.8% 10% 100.0% 100.0% 100.0% 100.0% 377 Ground Source Heat Pump 0.57 0 0 0 0 0 0 0 0 0				1		18,524,974	1	2.4%	80%	100.0%	100.0%	100%	100.0%	349,443
374 Automated Temperature Control 2.60 1 1 18,524,974 1 3.8% 80% 100.0% 100.0% 80% 100.0% 375 Destratification Fans 1.94 1 1 18,524,974 1 3.8% 20% 100.0% 100.0% 95% 100.0% 376 Free cooling 23.66 1 1 18,524,974 1 3.8% 20% 100.0% 100.0% 95% 100.0% 376 Free cooling 23.66 1 1 18,524,974 1 3.8% 10% 100.0%			0.11			10 504 074	4	2 99/	900/	100.00/	100.09/	050/	100.00/	531,705
375 Destratification Fans 1.94 1 1 18,524,974 1 3.8% 20% 100.0% 100.0% 95% 100.0% 376 Free cooling 23,666 1 1 18,524,974 1 3.8% 10% 100.0					· ·		1							447,752
376 Free cooling 23.66 1							1							132,926
378 Heat Recovery from Processes to Heat Ventilation Make-up Air 0.02 0 0 0 0 0 0 0 0 0	376						1							69,961
379 High efficiency non-packaged HVAC equipment 0.08 0 0				_										
380 High-efficiency rooftop AC with an EER of 13.5 2.02 1 1 18,524,974 1 3.8% 80% 100.0% 100.0% 60% 100.0% 381 Optimized duct design to improve efficiency 0.28 0 0				_										
381 Optimized duct design to improve efficiency 0.28 0 0						10 504 074	4	2 99/	900/	100.00/	100.09/	C00/	100.00/	335.814
382 Preventative Packaged HVAC Maintenance 66,810.86 1 1 18,524,974 1 3.8% 100% 100.0% 100.0% 15% 100.0% 383						18,524,974	1	3.6%	80%	100.0%	100.0%	00%	100.0%	335,814
383 Radiant Heaters 0.03 0						18,524.974	1	3.8%	100%	100.0%	100.0%	15%	100.0%	104,942
385 Seasonal Temperature Settings Adjustments 93,535.04 1 1 18,524,974 1 3.8% 100% 100.0% 80% 100.0% 386 Ventilation Heat Recovery 0.13 0 <t< td=""><td></td><td></td><td></td><td></td><td></td><td>.,,</td><td>·</td><td></td><td>. 2370</td><td></td><td></td><td>. 570</td><td></td><td> ,</td></t<>						.,,	·		. 2370			. 570		,
386 Ventilation Heat Recovery 0.13 0 0 387 Warehouse Loading Dock Seals 0.36 0 0 388 Match Motor Size to Load 0.55 0 0	384	Reduced Temperature Settings	93,535.04				1							447,752
387 Warehouse Loading Dock Seals 0.36 0 0 388 Match Motor Size to Load 0.55 0 0						18,524,974	1	3.8%	100%	100.0%	100.0%	80%	100.0%	559,690
388 Match Motor Size to Load 0.55 0 0 0						1	 						1	
													 	
1 000 protot Emotor by opprado						1	 						1	
390 Operations and maintenance 6.07 1 1 18.524,974 1 12.7% 5% 100.0% 100.0% 37% 100.0%				1	1	18,524.974	1	12.7%	5%	100.0%	100.0%	37%	100.0%	43,650

	MEASURE DESCRIPTION	MEA	ASURE SELECT	ION					APPLICABILIT	Y			
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Measure Inclusion (if Passed Measure	Total Sub- Sector Units	Measure Units per Sub- Sector Unit	- Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
391	Variable Speed Drives	23.18	1	1	18,524,974	1	12.7%	35%	100.0%	100.0%	9%	100.0%	74,322
	Improve Pump Components	1.24	1	1	18,524,974	1	47.8%	10%	100.0%	100.0%	4%	100.0%	35,392
393 394	Match Pump Size to Load Operation and Maintenance	4.64 26,724.61	1	1	18,524,974 18,524,974	1	47.8% 47.8%	20% 5%	100.0% 100.0%	100.0% 100.0%	20% 37%	100.0% 100.0%	353,916 163,686
394	Reduce or Control Pump Speed	10.43	1	1	18,524,974	1	47.8%	35%	100.0%	100.0%	94%	100.0%	2,910,961
396	Reduce Overall System Requirements	4.78	1	1	18,524,974	1	47.8%	50%	100.0%	100.0%	82%	100.0%	3,627,641
397	Minimize operating air pressure	94,310.25	1	1	105,282,493	1	6.8%	80%	100.0%	100.0%	45%	100.0%	2,595,780
398	Optimized Distribution System	6.59	1	1	105,282,493	1	6.8%	90%	100.0%	100.0%	83%	100.0%	5,386,243
399	Optimized sizing of compressor system	1.48	1	1	105,282,493	1	6.8%	70%	100.0%	100.0%	93%	100.0%	4,694,035
400 401	Premium efficiency ASD compressor	0.57 3.59	1	1	105,282,493		6.2%	70%	100.0%	100.0%	98%	100.0%	4,496,729
401	Impeller Trimming or Inlet Guide Vanes Premium efficiency control, with ASD (Fans)	13.17	1	1	105,282,493	1	6.2%	70%	100.0%	100.0%	89%	100.0%	4,496,729
	Preventative Fan Maintenance	0.12	0	0	100,202, 100		0.270	, 0,0	100.070	100.070	0070	100.070	1,000,101
404	Synchronous Belts (Fans)	13.17	1	1	105,282,493	1	6.2%	40%	100.0%	100.0%	100%	100.0%	2,622,000
405	Efficient Lighting Design	3.53	1	1	105,282,493	1	8.2%	100%	100.0%	100.0%	93%	100.0%	8,039,849
406	High efficiency ballasts for lighting	13.15	1	1	105,282,493	1	8.2%	100%	100.0%	100.0%	85%	100.0%	7,348,249
407	High Efficiency Light fixtures	3.07 0.25	0	0	105,282,493	1	8.2%	100%	100.0%	100.0%	85%	100.0%	7,348,249
408 409	Lighting controls: occupancy sensors Lighting controls: on/off timer settings	3.00	0	1	105,282,493	1	8.2%	80%	100.0%	100.0%	100%	100.0%	6,915,999
	Air Curtains	0.14	0	0	105,282,493	1	0.276	80%	100.0%	100.0%	100%	100.0%	6,915,998
411	Air Source Heat Pump for Backup Generators	1.27	1	1	105,282,493	1	11.6%	80%	100.0%	100.0%	95%	100.0%	9,251,192
412	Automated Temperature Control	2.60	1	1	105,282,493	1	11.6%	80%	100.0%	100.0%	80%	100.0%	7,790,477
413	Destratification Fans	1.94	1	1	105,282,493	1	11.6%	20%	100.0%	100.0%	95%	100.0%	2,312,798
414	Free cooling	23.66	1	1	105,282,493	1	11.6%	10%	100.0%	100.0%	100%	100.0%	1,217,262
415	Ground Source Heat Pump	0.57	0	0									
416 417	Heat Recovery from Processes to Heat Ventilation Make-up Air High efficiency non-packaged HVAC equipment	0.02	0	0									
	High-efficiency rooftop AC with an EER of 13.5	2.02	1	1	105,282,493	1	11.6%	80%	100.0%	100.0%	60%	100.0%	5,842,858
419	Optimized duct design to improve efficiency	0.28	0	0	100,202,100		11.070	0070	100.070	100.070	0070	100.070	0,012,000
	Preventative Packaged HVAC Maintenance	66,810.91	1	1	105,282,493	1	11.6%	100%	100.0%	100.0%	15%	100.0%	1,825,893
421	Radiant Heaters	0.03	0	0									
422	Reduced Temperature Settings	93,535.09	1	1	105,282,493	1	11.6%	80%	100.0%	100.0%	80%	100.0%	7,790,477
423	Seasonal Temperature Settings Adjustments	93,535.09	1	1	105,282,493	1	11.6%	100%	100.0%	100.0%	80%	100.0%	9,738,096
424 425	Ventilation Heat Recovery Warehouse Loading Dock Seals	0.13	0	0		1							
426	Sub-Metering and Interval Metering	242,867.71	1	1	105,282,493	1	43.6%	100%	100.0%	100.0%	75%	100.0%	34,413,744
427	Correctly sized motors	0.92	0	0	,								-,,,
428	High/Premium Efficiency Motors	0.58	0	0									
429	Premium Efficiency Control with ASDs (Other motors)	4.64	1	1	105,282,493	1	21.8%	70%	100.0%	100.0%	72%	100.0%	11,482,719
	Preventative Motor Maintenance	66,810.92	1	1	105,282,493	1	21.8%	100%	100.0%	100.0%	31%	100.0%	7,112,174
431 432	High efficiency battery charger (for forklifts) Doors, Covers and Curtains	3.98 3.51	1	1	105,282,493 105,282,493	1	1.9%	100% 10%	100.0% 100.0%	100.0% 100.0%	85% 79%	100.0%	1,695,750 945,630
433	Floating head pressure controls	20.18	1	1	105,282,493	1	11.4%	10%	100.0%	100.0%	97%	100.0%	1,161,090
434	Free-cooling	5.84	1	1	105,282,493	1	11.4%	35%	100.0%	100.0%	100%	100.0%	4,189,499
435	High Efficiency Chiller	1.15	1	1	105,282,493	1	11.4%	10%	100.0%	100.0%	96%	100.0%	1,149,120
436	Improve insulation of refrigeration system	0.75	0	0									
437 438	Optimized chilled water temperature and/or optimized condenser temperature Optimized condenser pressure	27,392.76 80,173.01	1	1	105,282,493 105,282,493	1	11.4% 11.4%	35% 35%	100.0% 100.0%	100.0% 100.0%	87% 87%	100.0% 100.0%	3,644,864 3,644,864
438	Optimized condenser pressure Premium efficiency refrigeration control system	0.33	0	0	105,282,493	1	11.4%	35%	100.0%	100.0%	87%	100.0%	3,644,864
440	Preventative refrigeration/cooling system maintenance	66,810.93	1	1	105,282,493	1	11.4%	100%	100.0%	100.0%	15%	100.0%	1,795,500
441	Smart Defrost Controls	56.54	1	1	105,282,493	1	11.4%	10%	100.0%	100.0%	90%	100.0%	1,077,300
442	VSD on chiller compressor	4.35	1	1	105,282,493	1	11.4%	80%	100.0%	100.0%	87%	100.0%	8,331,119
443	Advanced water heater controls	8.93	1	1	105,282,493		18.9%	90%	100.0%	100.0%	60%	100.0%	10,772,998
444	Air Curtains (Dryer)	41.28	1	1	105,282,493	1		9%	100.0%	100.0%	80%	100.0%	1,436,400
445 446	Air Curtains (Oven) Insulation (Dryer)	4.12 21.87	1	1	105,282,493 105,282,493	1 1	18.9% 18.9%	9% 95%	100.0% 100.0%	100.0% 100.0%	80% 40%	100.0% 100.0%	1,436,400 7,580,999
	Insulation (Dryer) Insulation (Oven)	21.87	1	1	105,282,493	1 1	18.9%	95%	100.0%	100.0%	40%	100.0%	7,580,999
448	Optimized Distribution System	1.72	1	1	105,282,493	1	18.9%	93%	100.0%	100.0%	76%	100.0%	14,100,658
449	Preventative Dryer Maintenance	66,810.94	1	1	105,282,493	1	18.9%	100%	100.0%	100.0%	15%	100.0%	2,992,500
450	Preventative Oven Maintenance	66,810.94	1	1	105,282,493	1	18.9%	100%	100.0%	100.0%	15%	100.0%	2,992,500
451	Process Heat Recovery to Preheat Makeup Water	2.13	1	1	105,282,493	1	18.9%	90%	100.0%	100.0%	75%	100.0%	13,466,248
452	Impeller Trimming (Pump)	8.80	1	1	105,282,493	1	8.7%	15%	100.0%	100.0%	95%	100.0%	1,307,722
453 454	Optimization of pumping system Premium Efficiency Control with ASDs (Pumps)	3.62 6.69	1	1	105,282,493 105,282,493	1 1	8.7% 8.7%	80% 70%	100.0%	100.0% 100.0%	92% 54%	100.0% 100.0%	6,754,271 3,468,905
	Preventative Pump Maintenance	5.20	1	1	105,282,493	1	8.7%	100%	100.0%	100.0%	31%	100.0%	2,844,870

Manufacture		MEASURE DESCRIPTION	MEA	ASURE SELECT	ION					APPLICABILITY	Y			
Manuscription at presents Manuscription 1	Measure ID		calculated for	Measure Screening?	Inclusion (if Passed		Units per Sub-	Applicability		of Measure Permutation by Measure	of Measure Permutation by Efficiency		Replacement	Total Applicable Measure Units
Applied Deliberion System 200 1 1 11/72/200 1 4/06 509 500.79 500.				1	1		1							209,245
														167,396
Marchest accept of compressed partners of the compression 1.88							1							347,347
462 Personal Riferancy And Proper properties 1,000 1,0							1							148,796 302,708
April							1							353,392
463 Person commended or use with metal-invarior selections 4,58 1 1 11,725,00 14,75 100,00 10						11,720,200		4.076	8078	100.078	100.078	9370	100.076	333,392
466														
469	464		14.38	1	1	11,728,208	1	4.0%	10%	100.0%	100.0%	99%	100.0%	46,034
April Decoder and from counting for make up at April 1 1 1 1 1 1 1 1 1				1			1							296,430
Add				1			1							180,416
Add Impeller Timming or bid Guids Vales 3.89 1 1 11,728,000 1 6.9% 70% 100,7% 10						11,728,208	1	4.0%	60%	100.0%	100.0%	35%	100.0%	97,648
Processor efficiency context with ASD (Fines) 13.17						11 729 209	1	16 0%	70%	100.0%	100.0%	08%	100.0%	1,362,925
472 September Park Barmannes 0.12 0 0 1 1.1728.200 1 1.09 1.00 1							1							1,237,758
172 Synchronical Better (Freign) 15.77 1 1 11.728.200 1 16.9% 400.0% 100.						, , 20,200	i '	. 5.070	. 570	.00.070		5570	.00.070	.,20,,,00
14 High efficiency Delta Busines for Spring 13:35 1 1 11:728,208 1 46% 100% 100.0%	472			1	1		1						100.0%	794,708
476 High Efficiency Light Sources 307 1 1 11,728,208 1 46% 100% 100.0% 100.0% 65% 100.0% 477 1477		Efficient Lighting Design					1							497,551
477 Lything controls conjugancy sensors 0.25							1							454,751
477 Ar Cutation Art Ar						11,728,208	1	4.6%	100%	100.0%	100.0%	85%	100.0%	454,751
479 AF Curtames				0		44 700 000	4	4.00/	000/	400.00/	400.00/	1000/	400.00/	428,001
APS Descriptions 1,000 1				0		11,728,208	1	4.5%	80%	100.0%	100.0%	100%	100.0%	428,001
Automated Temperature Control 2.60 1 1 11/728.208 1 5.2% 80% 100.0% 80% 100.0% 80% 100.0% 33				-		11 728 208	1	5.2%	80%	100.0%	100.0%	95%	100.0%	465,169
481 Destartification First 1946 1 1 17,728,208 1 5,2% 20% 100,0%							1							391,722
483 Ground Source Heat Pump				1	1		1							116,292
A84 Hear Recovery from Processes to Hear Ventilation Make-up Air			23.66	1	1	11,728,208	1	5.2%	10%	100.0%	100.0%	100%	100.0%	61,207
## High efficancy non-packaged HTM2 caugement				_										
488 High-efficiency mortop AC with an EER of 13.5 2.02 1			0.02											
488 Preventative Packaged PHACE Maintenance 68,810.88 1 1 11,728.208 1 5.2% 100% 100.0% 15% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 19% 100.0% 1						11 720 200	1	E 20/	909/	100.09/	100.09/	609/	100.09/	293,791
Add Provinciative Packaged PMAC Maintenance 66,810.98 1 1 11,728.208 1 5.2% 100% 100.0% 15% 100.0% 9 100.0%						11,728,208	<u> </u>	5.2%	80%	100.0%	100.0%	60%	100.0%	293,791
490 Radiant Heaters						11.728.208	1	5.2%	100%	100.0%	100.0%	15%	100.0%	91,810
491 Seasonal Temperature Settings Adjustments 93,535,16 1 1 11,728,208 1 5.2% 100% 100.0% 100.0% 80% 100.0% 42 424 425 40.0% 40.0% 40.0% 40.0% 40.0% 40.0% 40.0% 40.0% 40.0% 40.0% 40.0% 42.0%				0	0	,,	-	0.2,0						
492 Verillation Heat Recovery 0.13 0 0	490	Reduced Temperature Settings	93,535.16	1	1	11,728,208	1	5.2%	80%	100.0%	100.0%	80%	100.0%	391,722
494 Marehouse Leading Dock Seals 0.36 0 1 17,28,208 1 81.1% 92% 100.0% 100.0% 50% 100.0% 4.37 495 Sub-Matering and Interval Metering 242,867,398 1 1 11,728,208 1 81.1% 100% 100.0% 100.0% 75% 100.0% 7.13 496 Correctly sized motors 0.92 0 0 0 497 High-Premium Efficiency Motors 0.56 0 0 1 17,28,208 1 33.5% 70% 100.0% 72% 100.0% 2.47 498 Optimized motor control 36.22 1 1 11,728,208 1 33.5% 70% 100.0% 72% 100.0% 72% 100.0% 100.0% 72% 100.0% 72% 100.0% 100.0% 72% 100.0% 100.0% 72% 100.0% 100.0% 72% 100.0% 10						11,728,208	1	5.2%	100%	100.0%	100.0%	80%	100.0%	489,652
494 Integrated control system														
495 Sub-Metering and Interval Metering 242,887,98 1 1 11,728,208 1 81.1% 100% 100.0% 175% 100.0% 7.13						44 700 000	4	04.40/	020/	400.00/	400.00/	500/	400.00/	4,375,124
498 Correctly sized motors							1							7,133,354
497 High/Premium Efficiency Motors 0.58 0 0 1 1 1,728,208 1 33.5% 70% 100.0% 100.0% 90% 100.0% 2,74 499 20 20 20 20 20 20 20						11,720,200		01.176	10078	100.078	100.078	7370	100.076	7,133,334
499 Premium Efficiency Control with ASDs (Other motors) 4,64			0.58	0										
Free-rooling Free	498	Optimized motor control	36.22	1	1	11,728,208	1	33.5%	70%	100.0%	100.0%		100.0%	2,476,700
Synchronous Belts							1							1,967,601
Signature Figure				1			1							1,218,694
503 HE Dry-Type Transformers 68,872.66 1 1 11,728,208 1 2.8% 100% 100.0% 100.0% 100.0% 100.0% 100.0% 504 Doors, Covers and Curtains 3.51 1 1 11,728,208 1 1.5% 10% 100.0% 100.0% 79% 100.0% 150.0% 100.0% 100.0% 79% 100.0				1			1							1,572,508 101,056
504 Doors, Covers and Curtains 3.51 1 1 11,728,208 1 1.5% 10% 100.0% 100.0% 79% 100.0% 1 1 1 1 1 1 1 1 1							1 1							326,945
505 Floating head pressure controls 20.18 1 1 11,728,208 1 1.5% 10% 100.0% 100.0% 97% 100.0%							1							14,088
506 Free-cooling 5.84 1							1							17,298
508 Improve insulation of refrigeration system 0.75 0 0 11,728,208 1 1 11,728,208 1 1.5% 35% 100.0% 100.0% 87% 100.0% 5 510 Optimized condenser pressure 80,173.09 1 1 11,728,208 1 1.5% 35% 100.0% 100.0% 87% 100.0% 5 511 Optimized Distribution System 1.72 1 1 11,728,208 1 1.5% 35% 100.0% 100.0% 97% 100.0% 13 512 Premium efficiency refrigeration control system 0.33 0 0			5.84			11,728,208	1	1.5%	35%			100%		62,417
509 Optimized chilled water temperature and/or optimized condenser temperature 27,392.84 1 1 11,728,208 1 1.5% 35% 100.0% 100.0% 87% 100.0% 5 5 5 5 5 5 5 5 5						11,728,208	1	1.5%	10%	100.0%	100.0%	96%	100.0%	17,120
510 Optimized condenser pressure 80,173.09 1 1 11,728,208 1 1.5% 35% 100.0% 87% 100.0% 5 511 Optimized Distribution System 1.72 1 1 11,728,208 1 1.5% 80% 100.0% 100.0% 97% 100.0% 13 512 Premium efficiency refrigeration control system 0.33 0													ļ	
511 Optimized Distribution System 1.72 1 1 11,728,208 1 1.5% 80% 100.0% 100.0% 97% 100.0% 13 512 Premium efficiency refrigeration control system 0.33 0							1							54,303
512 Premium efficiency refrigeration control system 0.33 0 0 513 Preventative refrigeration/cooling system maintenance 66,81.01 1 1 11,728,208 1 1.5% 100% 100.0% 150.0% 90% 100.0% 1 514 Smart Defrost Controls 56,81.41 1 11,728,208 1 1.5% 10% 100.0% 100.0% 90% 100.0% 1 515 VSD on chiller compressor 4.35 1 1 11,728,208 1 1.5% 80% 100.0% 87% 100.0% 12 516 Advanced water heater controls 8.93 1 1 11,728,208 1 3.3% 90% 100.0% 60% 100.0% 2 517 Air Curtains (Dyer) 41.28 1 1 11,728,208 1 3.3% 9% 100.0% 80% 100.0% 2 518 Air Curtains (Oven) 4.12 1 1 11,728,208 1 3.3% 9%<							1							54,303 138,387
513 Preventative refrigeration/cooling system maintenance 66,811.01 1 11,728,208 1 1.5% 100% 100.0% 15% 100.0% 2 514 Smart Defrost Controls 56.54 1 1 11,728,208 1 1.5% 100.0% 100.0% 90% 100.0% 1 515 VSD on chiller compressor 4.35 1 1 11,728,208 1 1.5% 80% 100.0% 87% 100.0% 12 516 Advanced water heater controls 8.93 1 1 11,728,208 1 3.3% 90% 100.0% 60% 100.0% 517 Air Curtains (Dryer) 41.28 1 1 11,728,208 1 3.3% 9% 100.0% 80% 100.0% 2 518 Air Curtains (Oven) 4.12 1 1 11,728,208 1 3.3% 9% 100.0% 80% 100.0% 2						11,720,208	1	1.3%	ou%	100.0%	100.0%	97%	100.0%	130,387
514 Smart Defrost Controls 56.54 1 1 11,728,208 1 1.5% 10% 100.0% 100.0% 90% 100.0% 1 515 VSD on chiller compressor 4.35 1 1 11,728,208 1 1.5% 80% 100.0% 100.0% 87% 100.0% 12 516 Advanced water heater controls 8.93 1 1 11,728,208 1 3.3% 90% 100.0% 100.0% 60% 100.0% 2 517 Air Curtains (Dyer) 41.28 1 1 11,728,208 1 3.3% 9% 100.0% 100.0% 80% 100.0% 2 518 Air Curtains (Oven) 4.12 1 1 11,728,208 1 3.3% 9% 100.0% 80% 100.0% 2						11.728.208	1	1.5%	100%	100.0%	100.0%	15%	100.0%	26,750
515 VSD on chiller compressor 4.35 1 1 11,728,208 1 1.5% 80% 100.0% 100.0% 87% 100.0% 12 516 Advanced water heater controls 8.93 1 1 11,728,208 1 3.3% 90% 100.0% 60% 100.0% 20 517 Air Curtains (Dyer) 41.28 1 1 11,728,208 1 3.3% 9% 100.0% 80% 100.0% 2 518 Air Curtains (Over) 4.12 1 1 11,728,208 1 3.3% 9% 100.0% 80% 100.0% 2							1							16,050
516 Advanced water heater controls 8.93 1 1 11,728,208 1 3.3% 90% 100.0% 100.0% 60% 100.0% 20 517 Air Curtains (Dryer) 41.28 1 1 11,728,208 1 3.3% 9% 100.0% 100.0% 80% 100.0% 2 518 Air Curtains (Oven) 4.12 1 1 11,728,208 1 3.3% 9% 100.0% 80% 100.0% 2				11	1		1	1.5%				87%		124,120
518 Air Curtains (Oven) 4.12 1 1 11,728,208 1 3.3% 9% 100.0% 100.0% 80% 100.0% 2				1	1		1							208,651
							1							27,820
1 53M HINSHIPTION (LIDVAT) 1 2 3W 1 0.6W 1 400.0W 1 400.0							1							27,820
	519	Insulation (Dryer)	21.87	1	1	11,728,208	1	3.3%		100.0%				146,828 139,100

Section	Annual Appl Replacement Me		
Section Processable Open Maintenance Section 1 1 1772-208 1 3.3% 100% 100.0% 100	++-	Replacement Eligibility	/ Measure Units
S22 Process Heart Recovery to Probe all Makes private 243 1 1 11/728/208 1 3.3% 50% 100.0% 100.0%			
127 1 1 11/28/200 1 267% 80% 100.0% 100			
1			
Color			
S27 Premium Efficiency Control with ASD (Pumps) 669			
Signature Compressor Components			
530 Improve Compressor Components	6 100.0%	% 100.0%	0% 969,
SS1 Match Compressor Size to Load			
532 Operation and Maintenance 19.33	6 100.0% 1	% 100.0%	0% 1,302,
S33 Reduce Overall System Requirements	(100.00/ 6	400.004	00/ 0.040
554 Improve Fan Components			
535 Operation and Maintenance 86,724.77	3 100.0% 2	/6 100.076	076 2,400,
538 Reduce or Control Fan Speed	6 100.0% 1	% 100.0%	0% 1,552,
S38			
S39	6 100.0%	% 100.0%	0% 943,
540 High Efficiency Coupting Sensors			
Set Lighting controls: cocupancy sensors 0.25 0 0 154,563,379 1 15.7% 80% 100.0% 100.0% 543 Air Source Heat Pump for Backup Generators 1.27 1 1 154,563,379 1 22.2% 80% 100.0%			
542 Lighting controls: or/loft timer settings	6 100.0% 20	% 100.0%	0% 20,628,
543 Air Source Heal Pump for Backup Generators 1.27 1 1 154,563,979 1 2.2 % 80% 100.0% 100.0% 544 Automated Temperature Control 2.60 1 1 154,563,979 1 22.2% 80% 100.0% 100.0% 545 Destratification Fans 1.34 1 1 154,563,979 1 22.2% 80% 100.0% 100.0% 546 Ground Source Heat Pump 0.57 0 0	6 100.0% 19	400.004	0% 19,415,
544 Automated Temperature Control 2.60 1 1 154,563,979 1 22.2% 80% 100.0% 100.0% 545 Destratification Fans 1,94 1 1 154,563,979 1 22.2% 20% 100.0%			
545 Destratification Fans 1.94 1 1 154,563,979 1 2.2.% 20% 100.0% 100.0% 546 Ground Source Heat Pump 0.57 0			
548 Ground Source Heat Pump			, , , , , , , , , , , , , , , , , , , ,
S47	1	1	5,500.1
Fig. High-efficiency rooftop AC with an EER of 13.5 2.02 1 1 154,563,979 1 22.2% 80% 100.0% 100.0% 100.0% 1550 Optimized duct design to improve efficiency 0.28 0 0 0			
S50 Optimized duct design to improve efficiency 0.28 0 0 0 0 0 0 0 0 0 0			
Preventative Packaged HVAC Maintenance	6 100.0% 16	% 100.0%	0% 16,500,
552 Radiant Heaters			
Seasonal Temperature Settings	6 100.0% 5	% 100.0%	0% 5,156,
Seasonal Temperature Settings Adjustments	6 100.0% 22	% 100.0%	0% 22,000,
555 Vertilation Heat Recovery 0.13 0 0 0 0 0 0 0 0 0			
556 Warehouse Loading Dock Seals 0.36 0 0	100.070 21	100.070	21,000,
558 Motor Efficiency Upgrade 0.58 0 0			
559 Operations and maintenance 6.07 1 1 154,563,979 1 17.6% 5% 100.0% 1			
560 Variable Speed Drives 23.18 1 1 154,563,979 1 17.6% 35% 100.0% 100.		\bot	
561 High efficiency battery charger (for forklifts) 3.98 1 1 154,563,979 1 3.7% 100% 100.0%			
562 HE Dry-Type Transformers 68,873.00 1 1 54,563,979 1 3.7% 100% 100.0% 100.0% 563 Dors, Covers and Curtains 3.51 1 1 154,563,979 1 5.2% 10% 100.0% 100.0% 564 Floating head pressure controls 20.18 1 1 154,563,979 1 5.2% 10% 100.0% 100.0% 565 Free-cooling 5.84 1 1 154,563,979 1 5.2% 35% 100.0% 100.0% 566 High Efficiency Chiller 1.15 1 1 154,563,979 1 5.2% 35% 100.0% 100.0% 567 Improve insulation of refrigeration system 0.75 0 0 1 1.52% 10% 100.0% 100.0% 568 Optimized chilled water temperature and/or optimized condenser temperature 27,382,91 1 1 154,563,979 1 5.2% 35% 100.0% 100.0% 569 Optimized condenser pressure 80,173,16 1 1 154,563,979 1 5.2% 35% 100.0% 1			
563 Doors, Covers and Curtains 3.51 1 1 154,563,979 1 5.2% 10% 100.0% 100.0% 100.0% 564 Floating head pressure controls 20.18 1 1 154,563,979 1 5.2% 10% 100.			
564 Floating head pressure controls 20.18 1 1 154,563,979 1 5.2% 10% 100.0% 100.0% 565 Free-cooling 1 1 154,563,979 1 5.2% 35% 100.0%			
565 Free-cooling 5.84 1 1 154,563,979 1 5.2% 35% 100.0% 100.0% 566 High Efficiency Chiller 1.15 1 1 154,563,979 1 5.2% 10% 100.0% 100.0% 567 Improve insulation of refrigeration system 0.75 0 </td <td></td> <td></td> <td></td>			
567 Improve insulation of refrigeration system 0.75 0			
568 Optimized chilled water temperature and/or optimized condenser temperature 27,392,91 1 1 54,563,979 1 5.2% 35% 100.0% 100.0% 569 Optimized condenser pressure 80,173.16 1 1 154,563,979 1 5.2% 35% 100.0% 100.0% 570 Premium efficiency refrigeration control system 0.33 0 0 0 0 0	6 100.0%	% 100.0%	0% 776,
569 Optimized condenser pressure 80,173.16 1 1 154,563,979 1 5.2% 35% 100.0% 100.0% 570 Premium efficiency refrigeration control system 0.33 0		\perp	
570 Premium efficiency refrigeration control system 0.33 0 0			
	6 100.0% 2	% 100.0%	0% 2,463,
571 Preventative refrigeration/cooling system maintenance 66,811.07 1 1 154,563,979 1 5.2% 100% 100.0%	6 100.0% 1	% 100.0%	0% 1,213,
573 Advanced water heater controls 8.93 1 1 154.563.979 1 10.5% 90% 100.0%			
574 Air Curtains (Dryer) 41.28 1 1 154,563,979 1 10.5% 9% 100.0%			
575 Air Curtains (Oven) 4.12 1 1 154,563,979 1 10.5% 9% 100.0% 100.0%		,	-,,,
576 Insulation (Dryer) 21.87 1 1 154,563,979 1 10.5% 95% 100.0% 100.0%			
577 Insulation (Oven) 2.18 1 1 154,563,979 1 10.5% 90% 100.0% 100.0%			
578 Optimized Distribution System 1.72 1 1 154,663,979 1 10.5% 93% 100.0% 100.0%			
579 Preventative Dryer Maintenance 66,811.08 1 1 154,563,979 1 10.5% 100% 100.0% 100.0% 580 Preventative Oven Maintenance 66,811.08 1 1 154,563,979 1 10.5% 100% 100.0% 100.0%			
580 Preventative Oven Maintenance 66,811.08 1 1 154,563,979 1 10.5% 100% 100.0% 100.0% 581 Process Heat Recovery to Preheat Makeup Water 2.13 1 1 154,563,979 1 10.5% 90% 100.0% 100.0%			
501 Process neat recovery to Preneat Makeup Water 2.13 1 154,563,979 1 10.376 3076 100.0			
583 Match Pump Size to Load 4.64 1 1 154,563,979 1 7.5% 20% 100.0% 100.0%			
584 Operation and Maintenance 26,724.82 1 1 154,563,979 1 7.5% 5% 100.0% 100.0%			
585 Reduce or Control Pump Speed 10.43 1 1 154,563,979 1 7.5% 35% 100.0% 100.0%	6 100.0% 3	% 100.0%	0% 3,795,

	MEASURE DESCRIPTION	MEA	ASURE SELECT	TON					APPLICABILIT	Y			
Measure ID	Measure Name	Measure TRC calculated for 2020	Passed Measure Screening? (1=Yes, 0=No)	Measure Inclusion (if Passed Measure	Total Sub- Sector Units	Measure Units per Sub- Sector Unit	Applicability	Technical Feasibility	Distribution of Measure Permutation by Measure Size	Distribution of Measure Permutation by Efficiency Level	Not Yet Adopted Rate	Annual Replacement Eligibility	Total Applicable Measure Units
586	Reduce Overall System Requirements	4.78	1	1	154,563,979	1	7.5%	50%	100.0%	100.0%	82%	100.0%	4,729,434
587	Compressor Control	8.37	1	1	173,661,286	1	8.7%	25%	100.0%	100.0%	72%	100.0%	2,721,640
588	Improve Compressor Components	1.01	1	1	173,661,286	1	8.7%	15%	100.0%	100.0%	92%	100.0%	2,086,591
589	Match Compressor Size to Load	0.78	0	0	170 001 000	.	0.70/	75%	400.00/	100.00/	070/	100.00/	4 405 000
590	Operation and Maintenance	19.93 34.42	1	1	173,661,286 173,661,286	1	8.7% 8.7%	75% 30%	100.0% 100.0%	100.0% 100.0%	37% 85%	100.0% 100.0%	4,195,862 3,855,657
591 592	Reduce Overall System Requirements Improve Fan Components	0.81	0	0	173,001,280	1	0.7 %	30%	100.0%	100.0%	65%	100.0%	3,833,837
593	Operation and Maintenance	26,724.83	1	1	173,661,286	1	7.5%	50%	100.0%	100.0%	37%	100.0%	2,419,901
594	Reduce or Control Fan Speed	48.27	1	1	173,661,286	1	7.5%	10%	100.0%	100.0%	90%	100.0%	1,177,249
595	Reduce Overall System Requirements	4.39	1	1	173,661,286	1	7.5%	15%	100.0%	100.0%	75%	100.0%	1,471,561
596	Efficient Lighting Design	3.53	1	1	173,661,286	1	6.3%	100%	100.0%	100.0%	93%	100.0%	10,165,267
597	High efficiency ballasts for lighting	13.15	1	1	173,661,286	1	6.3%	100%	100.0%	100.0%	85%	100.0%	9,290,835
598	High Efficiency Light fixtures	3.07	1	1	173,661,286	1	6.3%	100%	100.0%	100.0%	85%	100.0%	9,290,835
599	Lighting controls: occupancy sensors	0.25	0	0		-	0.624						
600	Lighting controls: on/off timer settings	3.00	1	1	173,661,286	1	6.3%	80%	100.0%	100.0%	100% 95%	100.0%	8,744,315
601 602	Air Source Heat Pump for Backup Generators Automated Temperature Control	1.27 2.60	1	1	173,661,286 173,661,286	1	9.6% 9.6%	80% 80%	100.0% 100.0%	100.0% 100.0%	95% 80%	100.0% 100.0%	12,654,075 10.656.063
603	Destratification Fans	1.94	1	1	173,661,286	1	9.6%	20%	100.0%	100.0%	95%	100.0%	3,163,519
604	Ground Source Heat Pump	0.57	0	0	173,001,200	'	9.076	2076	100.078	100.078	9376	100.078	3,103,319
605	Heat Recovery from Processes to Heat Ventilation Make-up Air	0.02	0	0									
606	High efficiency non-packaged HVAC equipment	0.08	0	0									
607	High-efficiency rooftop AC with an EER of 13.5	2.02	1	1	173,661,286	1	9.6%	80%	100.0%	100.0%	60%	100.0%	7,992,048
608	Optimized duct design to improve efficiency	0.28	0	0									
609	Preventative Packaged HVAC Maintenance	66,811.11	1	1	173,661,286	1	9.6%	100%	100.0%	100.0%	15%	100.0%	2,497,515
610	Radiant Heaters	0.03	0	0									
611	Reduced Temperature Settings	93,535.29	1	1	173,661,286	1	9.6%	80%	100.0%	100.0%	80%	100.0%	10,656,063
612	Seasonal Temperature Settings Adjustments	93,535.29	1	1	173,661,286	1	9.6%	100%	100.0%	100.0%	80%	100.0%	13,320,079
613	Ventilation Heat Recovery	0.13	0	0									
614	Warehouse Loading Dock Seals	0.36 0.55	0	0									
615 616	Match Motor Size to Load Motor Efficiency Upgrade	0.58	0	0									
617	Operations and maintenance	6.07	1	1	173,661,286	1	21.7%	5%	100.0%	100.0%	37%	100.0%	698,269
618	Variable Speed Drives	23.18	1	1	173,661,286	1	21.7%	35%	100.0%	100.0%	9%	100.0%	1,188,945
619	High efficiency battery charger (for forklifts)	3.98	1	1	173,661,286	1	2.3%	100%	100.0%	100.0%	85%	100.0%	3,439,149
620	HE Dry-Type Transformers	68,873.33	1	1	173,661,286	1	2.1%	100%	100.0%	100.0%	100%	100.0%	3,683,724
621	Doors, Covers and Curtains	3.51	1	1	173,661,286	1	7.4%	10%	100.0%	100.0%	79%	100.0%	1,011,394
622	Floating head pressure controls	20.18	1	1	173,661,286	1	7.4%	10%	100.0%	100.0%	97%	100.0%	1,241,838
623	Free-cooling	5.84	1	1	173,661,286	1	7.4%	35%	100.0%	100.0%	100%	100.0%	4,480,858
624	High Efficiency Chiller	1.15	1	1	173,661,286	1	7.4%	10%	100.0%	100.0%	96%	100.0%	1,229,035
625	Improve insulation of refrigeration system	0.75	0	0			- 404						
626 627	Optimized chilled water temperature and/or optimized condenser temperature Optimized condenser pressure	27,392.97 80,173.22	1	1	173,661,286 173,661,286	1	7.4% 7.4%	35% 35%	100.0% 100.0%	100.0% 100.0%	87% 87%	100.0% 100.0%	3,898,346 3,898,346
628	Premium efficiency refrigeration control system	0.33	0	0	173,001,280	1	7.4%	35%	100.0%	100.0%	87%	100.0%	3,898,346
629	Preventative refrigeration/cooling system maintenance	66.811.14	1	1	173.661.286	1	7.4%	100%	100.0%	100.0%	15%	100.0%	1.920.368
630	Smart Defrost Controls	56.54	1	1	173,661,286	1	7.4%	100%	100.0%	100.0%	90%	100.0%	1,152,221
631	Advanced water heater controls	8.93	1	1	173,661,286	1	11.3%	90%	100.0%	100.0%	60%	100.0%	10,598,255
632	Air Curtains (Dryer)	41.28	1	1	173,661,286	1	11.3%	9%	100.0%	100.0%	80%	100.0%	1,413,101
633	Air Curtains (Oven)	4.12	1	1	173,661,286	1	11.3%	9%	100.0%	100.0%	80%	100.0%	1,413,101
634	Insulation (Dryer)	21.87	1	1	173,661,286	1	11.3%	95%	100.0%	100.0%	40%	100.0%	7,458,031
635	Insulation (Oven)	2.18	1	1	173,661,286	1	11.3%	90%	100.0%	100.0%	40%	100.0%	7,065,503
636	Optimized Distribution System	1.72	1	1	173,661,286	1	11.3%	93%	100.0%	100.0%	76%	100.0%	13,871,938
637	Preventative Dryer Maintenance	66,811.14	1	1	173,661,286	1 1	11.3%	100%	100.0%	100.0%	15%	100.0%	2,943,960
638	Preventative Oven Maintenance	66,811.15	1	1	173,661,286	1 1	11.3%	100%	100.0%	100.0%	15%	100.0%	2,943,960
639 640	Process Heat Recovery to Preheat Makeup Water Improve Pump Components	2.13 1.24	1	1	173,661,286 173,661,286	1	11.3% 13.7%	90%	100.0% 100.0%	100.0% 100.0%	75% 4%	100.0% 100.0%	13,247,819 94,889
641	Improve Pump Components Match Pump Size to Load	4.64	1	1	173,661,286	1	13.7%	20%	100.0%	100.0%	20%	100.0%	94,889
642	Operation and Maintenance	26,724.89	1	1	173,661,286	1	13.7%	5%	100.0%	100.0%	37%	100.0%	438,863
643	Reduce or Control Pump Speed	10.43	1	1	173,661,286	1	13.7%	35%	100.0%	100.0%	94%	100.0%	7,804,652
	Reduce Overall System Requirements	4.78	1	1	173,661,286	1	13.7%	50%	100.0%	100.0%	82%	100.0%	9,726,162

Appendix E: Program Assumptions

Sector	Program Name	Measure Bundle	Participation Approach	Payback Acceptance Curve	Net To Gross Ratio
	Appliance Recycling	Fridge recycling	В	Not Applicable	0.63
	Appliance necycling	Freezer recycling	В	Not Applicable	0.73
		Central AC	Α	Residential - HVAC	0.72
		ASHP (all other)	Α	Residential - HVAC	0.72
		DFHP	Α	Residential - HVAC	0.72
	Heating & Cooling	Duct insulation/sealing	Α	Residential - HVAC	0.72
		Duct replacement	Α	Residential - HVAC	0.72
		Tune-up	Α	Residential - HVAC	0.72
		ASHP (elec res retrofit)	Α	Residential - HVAC	0.72
		LEDs (HEC)	В	Not Applicable	0.80
		Faucet aerators (HEC)	В	Not Applicable	0.80
	Home Energy Check-up	Low flow showerheads (HEC)	В	Not Applicable	0.80
		Home insulation	Α	Residential - HVAC	0.80
		Other shell	Α	Residential - HVAC	0.80
		Home air sealing	Α	Residential - HVAC	0.90
	Home Energy Reports	Home Energy Reports	В	Not Applicable	1.00
		HVAC filters (NEEP)	В	Not Applicable	1.00
		LEDs (NEEP)	В	Not Applicable	1.00
		Smart strips (NEEP)	В	Not Applicable	1.00
Residential		Faucet aerators (NEEP)	В	Not Applicable	1.00
		Water heater pipe wrap & blanket (NEEP)	В	Not Applicable	1.00
	Neighborhood Energy Efficiency Program	Water heater temp adjustment (NEEP)	В	Not Applicable	1.00
	, , , , , , , , , , , , , , , , , , ,	Window AC winterization kits (NEEP)	В	Not Applicable	1.00
		Digital plate wall t-stat (mobile)	В	Not Applicable	1.00
		Duct sealing (mobile)	В	Not Applicable	1.00
		Air sealing (mobile)	В	Not Applicable	1.00
		Attic plug & fill insulation (mobile)	В	Not Applicable	1.00
		Other (mobile)	В	Not Applicable	1.00
		LEDs (online)	В	Not Applicable	0.70
		Low income kits	В	Not Applicable	1.00
	Online Store	Smart Thermostats	Α	Residential - HVAC	0.80
		Smart Strips	Α	Residential - Generic	0.80
		Other	Α	Residential - Generic	0.80
	Water Heating	HPWH	Α	Residential - HVAC	0.80
	<u> </u>	Solar WH	Α	Residential - HVAC	0.80
		In-unit DI WH	В	Not Applicable	0.90
		In-unit DI LEDs	В	Not Applicable	0.90
	Multifamily	Common area LED lamps & fixtures	В	Not Applicable	0.90
		Common area other	В	Not Applicable	0.90

Appendix E: Program Assumptions

		Lighting	Α	Comm Major Planned	0.70
		Food Service	А	Comm Major Planned	0.70
		Unitary HVAC	Α	Comm Major Planned	0.70
		Chillers	А	Comm Minor Planned	0.70
		VFDs	А	Comm Major Planned	0.70
		Refrigeration	А	Comm Major Planned	0.70
		Hot Water	А	Comm Major Planned	0.70
	EnergyWise	Prescriptive Other	А	Comm Major Planned	0.70
Commercial		Custom Lighting	А	Comm Major Planned	0.70
Commercial		Custom Non-Lighting	А	Comm Major Planned	0.70
		Ag Lighting	А	Comm Major Planned	0.90
		Ag Ventilation	А	Comm Major Planned	0.90
		Ag Irrigation	Α	Comm Major Planned	0.90
		New Construction	А	Comm Major Planned	0.90
		RCx	А	Comm Major Planned	0.8
	Small Business	SB Lighting	Α	Comm Major Planned	0.95
	onian basiness	SB Non-Lighting	А	Comm Major Planned	0.95
	Municipal LED Lighting	Municipal LED Fixture Replacement	В	Not Applicable	1.00
		IS_Bundle	А	Industrial	0.80
Industrial	Industrial efficiency	IPC_Bundle_Ltg	А	Industrial	0.80
and doctried		IPC_Bundle_HVAC	А	Industrial	0.80
	Strategic Energy Management	SEM_Bundle	Α	Industrial	0.80

Appendix E: Program Assumptions

Avoided Costs

Data Item	Value
Avoided Capacity Cost [Real] (\$/kW-year)	\$65.93
Avoided Energy Cost [Real] [\$/kWh]	\$0.04
Discount Rate	5.99%
Line Losses	15.21%
(Winter)	21.00%

Measure Level Data

Measures				Participation		Cost Data	
Measure ID	Sector	Program	Measure Name	Eligible Customers* % of Sector	Maximum Participation (in 2029) (% of eligible customers)	Recruitment Costs (\$/participant)	Incentive (\$/MW)
1	Residential	DLC	Smart Thermostat	31.00%	20.00%	\$55.00	\$36.00
2	Residential	DLC	Water Heater	69.00%	23.00%	\$200.00	\$42.00
3	Commercial	DLC	Smart Thermostat	24.00%	20.00%	\$70.00	\$60.00
4	Commercial	DLC	Water Heater	37.00%	10.00%	\$250.00	\$72.00
5	Industrial	Interruptible	N/A	N/A	N/A	\$0.00	\$4.50
6	Commercial	Standby Generation	N/A	N/A	N/A	\$0.00	\$2.25
9	Residential	ToU	N/A	0.13%	9.93%	\$0.00	\$0.00
10	Commercial	ToU	N/A	7.90%	10.44%	\$0.00	\$0.00
12	Industrial	ToU	N/A	24.77%	93.16%	\$0.00	\$0.00

*Source: Opinion Dynamics Survey, RECS, CBECS and ICF expert opinion

- 1. Participation and Cost data is obtained from multiple sources that include potential studies and DR programs/pilots across the US, along with data supported by ICF program implementation experience
- 2. Participation numbers for ToU were obtained from program tracking data. The eligibility number comes from the AMI installations (prior to merger with Dominion).
- 3. Industrial and Standby generation customers are fixed and their participation curves were not modeled

Program Cost Data

Admin Costs					
Sector	Program	Fixed upfront cost (1000 \$'s)	Fixed annual costs (1000 \$'s)	Variable Admin Costs (\$/MW)	
Residential	DLC	\$180	\$120	\$0	
Residential	CPP	\$120	\$120	\$0	
Commercial	DLC	\$180	\$120	\$0	
Commercial	CPP	\$120	\$120	\$0	
Industrial	Interruptible	\$0	\$0	\$50	
Commercial	Standby Generation	\$0	\$0	\$25	
Residential	ToU	\$0	\$0	\$0	
Commercial	ToU	\$0	\$0	\$0	
Industrial	ToU	\$0	\$0	\$0	

- Notes:

 1. Residential DLC program upfront costs do not account for cost-effectiveness results, which would remove a measure from the
- 2. ToU program costs are assumed to be incremental to existing program and hence there are no additional costs
- 3. Existing program interruptible and standby generation do not incur any upfront costs

DR Events Assumption

Ī	Program	No. of events	Duration of event	
ı	DLC	Maximum 10 per seasor	4 hour events	
	CPP	Maximum 12 per seasor	3-4 hour events	
	Standby Generation	Maximum 10 per seasor	4-hour events	
	Interruptible	Maximum 10 per seasor	4-hour events	

Sample Time of Use Modified Prices

	Sector	Rate Code	Peak (\$/kWh)	Off-Peak (\$/kWh)	Peak to Off-Peak
	Residential	Rate 5	\$0.28	\$0.10	2.71
Existing Rates	Commercial	Rate 16	\$0.19	\$0.10	1.79
	Industrial	Rate 21	\$0.10	\$0.05	1.97
	Residential	N/A	\$0.32	\$0.09	3.50
Modified Rates	Commercial	N/A	\$0.22	\$0.09	2.50
	Industrial	N/A	\$0.10	\$0.05	2.00